
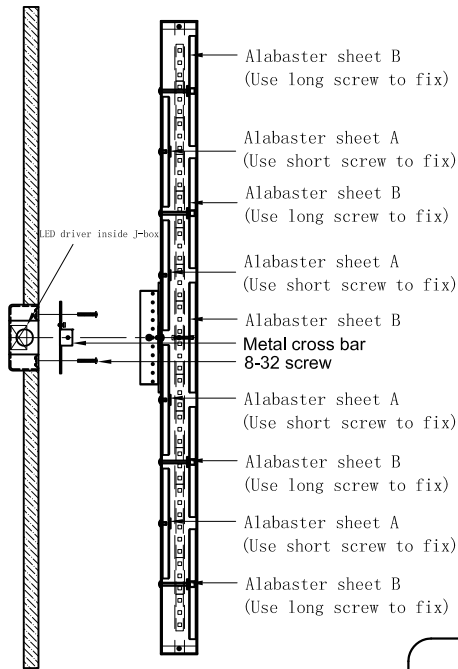


#### FIXTURE ASSEMBLY (FIG.2):

1. Use screw to fix alabaster sheet on the frame.
2. Unpack fixture carefully, note fixture frame comes fully assembled and two sets of hands are needed for installation.
3. Fix the lamp target on the wall with self-tapping screws and keep it close to the wall to avoid water entering the junction box.
4. Bring fixture close enough to outlet box to allow for wire connections to be done.
5. Carefully tuck in all wires. Align fixture back plate mounting holes to Mounting Block holes and screw in the flat head screws.
6. Fix the lamp body on the lamp target with the head nut.
7. Fix the stainless steel outer frame on the wall basin with flat head screws, be sure to lock the screws on the top first. Lock the bottom screw again.
8. Clean fixture with a damp micro fiber or cotton cloth, avoid using any cleaners that contains chemicals or abrasives that would damage fixture finish.





 You will need - LED STRIPS

#### WARNING:


1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb exceeding the maximum wattage specified on the socket label.

#### NOTE:

To prevent water entering the fixture, the grub screws must be tightened such that the frame is pressed tightly to the water-proof washer.

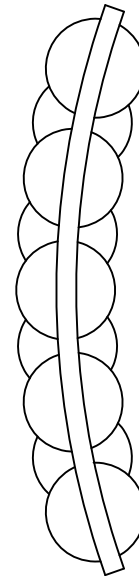

(FRONT VIEW)

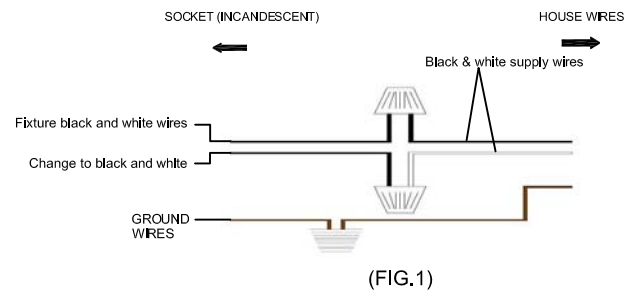

(FIG.1)

