



If you have any questions or problems assembling your fixture please call us for assistance. Customer Service: (702)361-4345 or (800)525-2655, customer.services@kalco.com

**WARNING:**

1. This fixture must be installed by qualified electrician and contractors understanding ceiling hanging points, structure and strength to meet building code.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.

**FIXTURE ASSEMBLY :**

1. Unpack fixture carefully, note fixture frame comes fully assembled .
2. Use 8-32 screw to fix crossbar on J-box, use self-tapping screw to fix crossbar on wall.
3. Refer to wiring diagram. Splice the ribbed side of fixture cord to the white supply wire from outlet box with wire connector. Splice the smooth side of the fixture cord to black supply wire from outlet box with wire connector.
4. Carefully tuck in all wires Attach the back plate with the mounting screw on the crossbar. Secure fixture with shell knobs.
5. Use grub screw to fix back plate on crossbar.
6. Install 24V/LED. STRIPS, do not use bulbs that exceeds 5W.

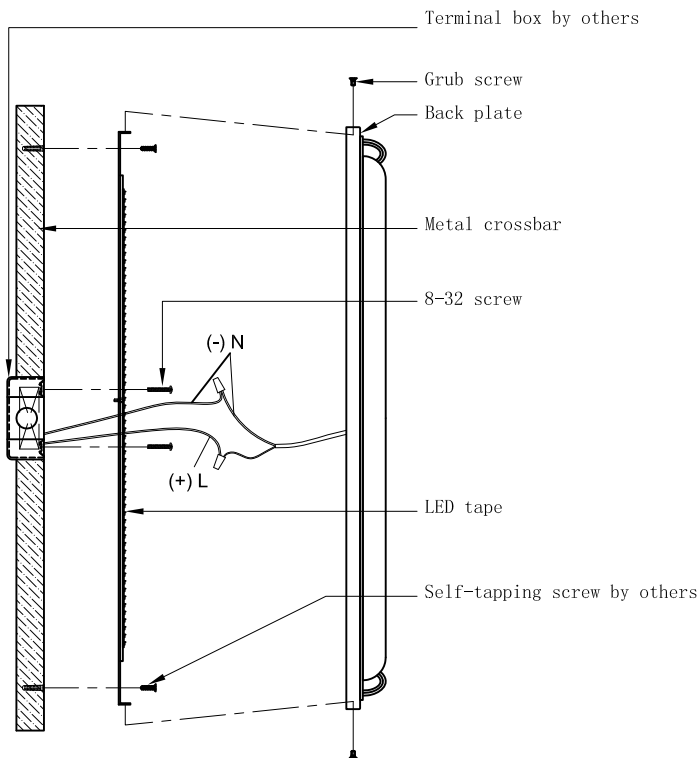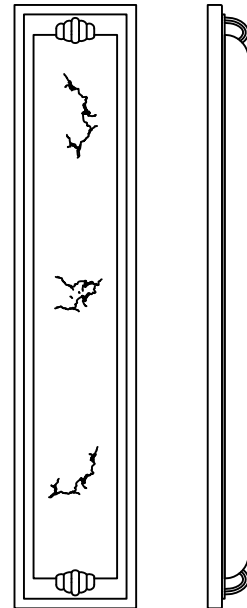

**Wiring Diagram**

**Wire connecting view**

