

ROTO 12 LT 5CCT Chandelier

3-819-xx

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-15 Black

LIGHT SOURCE	68 Watt LED 90CRI
LUMINAIRE POWER	68 Watts or LED equivalent
RATED LIFE	50000 HR RL
COLOR TEMPERATURES	Field Selectable 2700/3000/4000/ 5000/6500 CCT Note: Oxygen standard setting 3000k Determined by the type of bulb installed
LUMEN OUTPUT	1562 Lm at 3000K
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	68W
DIMMING	TRIAC Dimming at 120v
CONSTRUCTION	CRS, Aluminum, Silicone
DIFFUSER	Silicone
FINISHES	-15 Matte Black,
MOUNTING	Unit mounts to a 4" Octagonal Jox
STANDARDS	Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

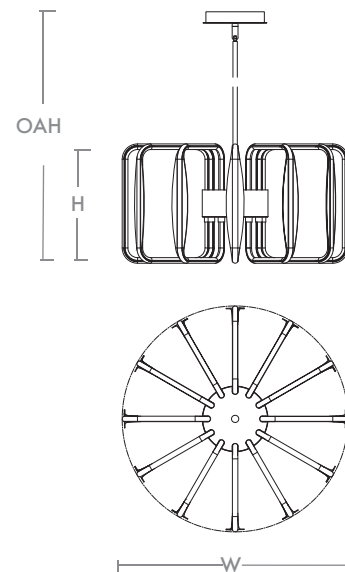

DIMENSIONS

D: 24.5"

H: 13"

OAH: Fixture Supplied w/ 2-8"
2-12" and 3-16" Stems to
Customize hanging ht.

