

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.

2. Take out the Acrylic diffuser from the fixture. Remove fixture screws to release mounting plate. Secure mounting plate to the j-box. Place fixture onto mounting plate and mark outer perimeter support holes on ceiling for anchors. Remove fixture and install anchors in ceiling and feed ceiling wires through mounting plate.

3. Make wire connections.

-Attach ground wire to the mounting plate with a green ground screw, then connect building ground wire using a wire nut.

-Attach white wire (neutral) from driver to white wire from building using a wire nut.

-Attach black wire (hot) from driver to black wire from building using a wire nut.

Tuck the wire connections neatly into the junction box.


Neatly coil and secure excess cable to fit inside canopy

4. Place fixture over mounting plate and reinstall fixture screw and self-tapping screws to anchors to securely mount fixture to the ceiling.

5. Use 5-way switch (CCT switch) to select desired color temperature.

6. Install the Acrylic diffuser on the ceiling fixture.

7. Turn on the power at fuse or circuit box.

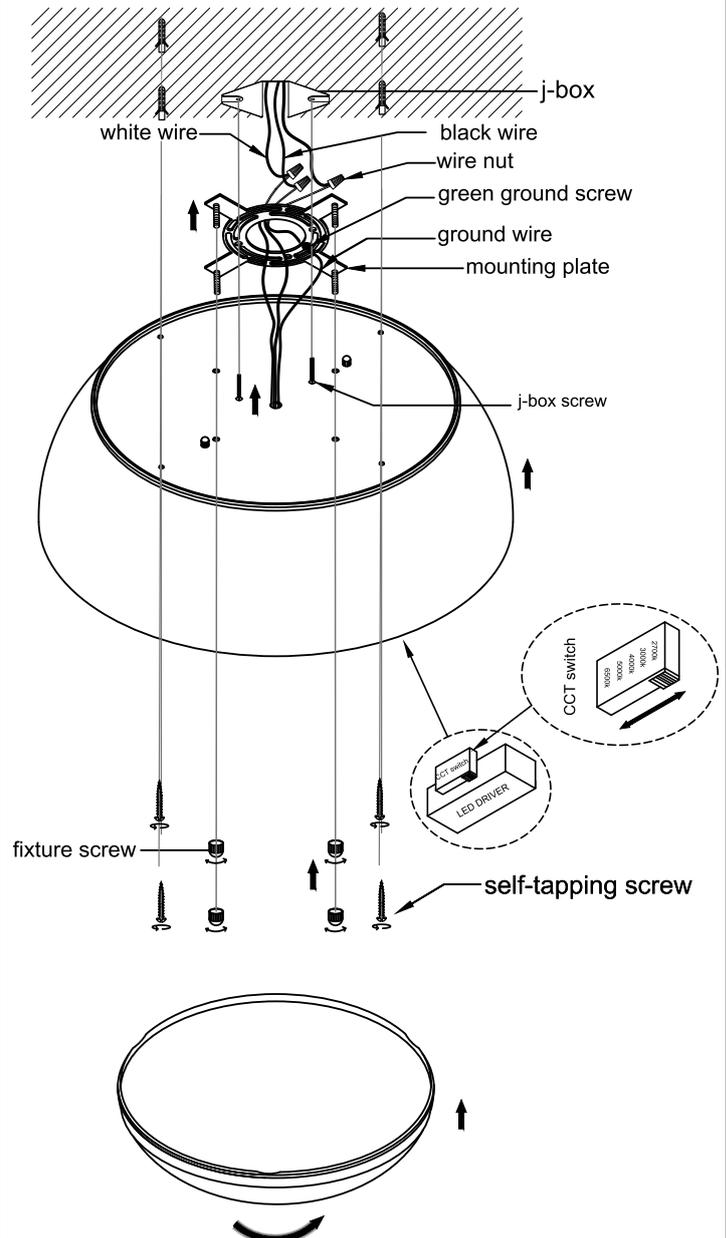

oxygen

LUCCI Ceiling Mount
3-216-1550 / 3-216-650

ASSEMBLY
INSTRUCTIONS