



ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

- Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
- Thread the suspended rod onto the nipple (A). Choose the suitable suspended rods that you need. Insert the fixture wire through the suspended rods and connect them together. Then thread the swivel into the suspended rod tightly.
- Feed the wires through the threaded nut, canopy plate, and canopy, allowing them to slide down over the suspended rod. Take care not to cause any scratches.
- Thread the crossbar onto the swivel. The wires can be fed through the notched coupling below the crossbar. Cut the red and black wires to desired length, making sure to keep Sets A, B, and C identified.
- Secure the crossbar to the junction box by threading the two junction box screws through the slotted holes.
- Make wire connections. Refer to driver labels for wire identification.
 - Attach ground wire to building ground wire using a wire nut. Connect white wires (neutral) from drivers to white wire from building. Connect black wires (hot) from drivers to black wire from building.
 - Attach SET A wires from driver to SET A wires from light. Connect red wire (positive) to red wire, black wire (negative) to black wire.
 - Attach SET B wires from driver to SET B wires from light. Connect red wire (positive) to red wire, black wire (negative) to black wire.
 - Attach SET C wires from driver to SET C wires from light. Connect red wire (positive) to red wire, black wire (negative) to black wire.
 Tuck the wire connections neatly into the junction box.
- Slide canopy and canopy plate over threaded pipe and place drivers inside canopy. Secure canopy using threaded nut.
- Install the acrylic rods A/B/C/D.

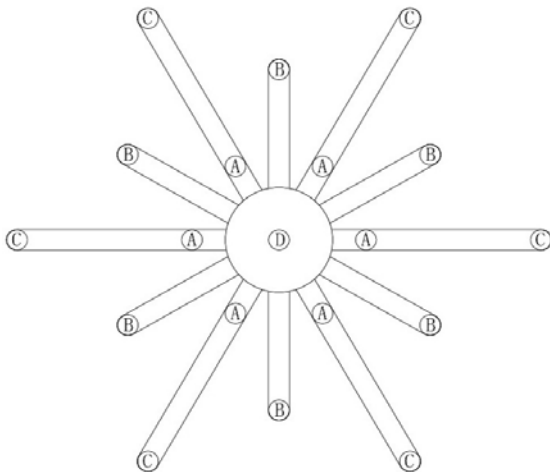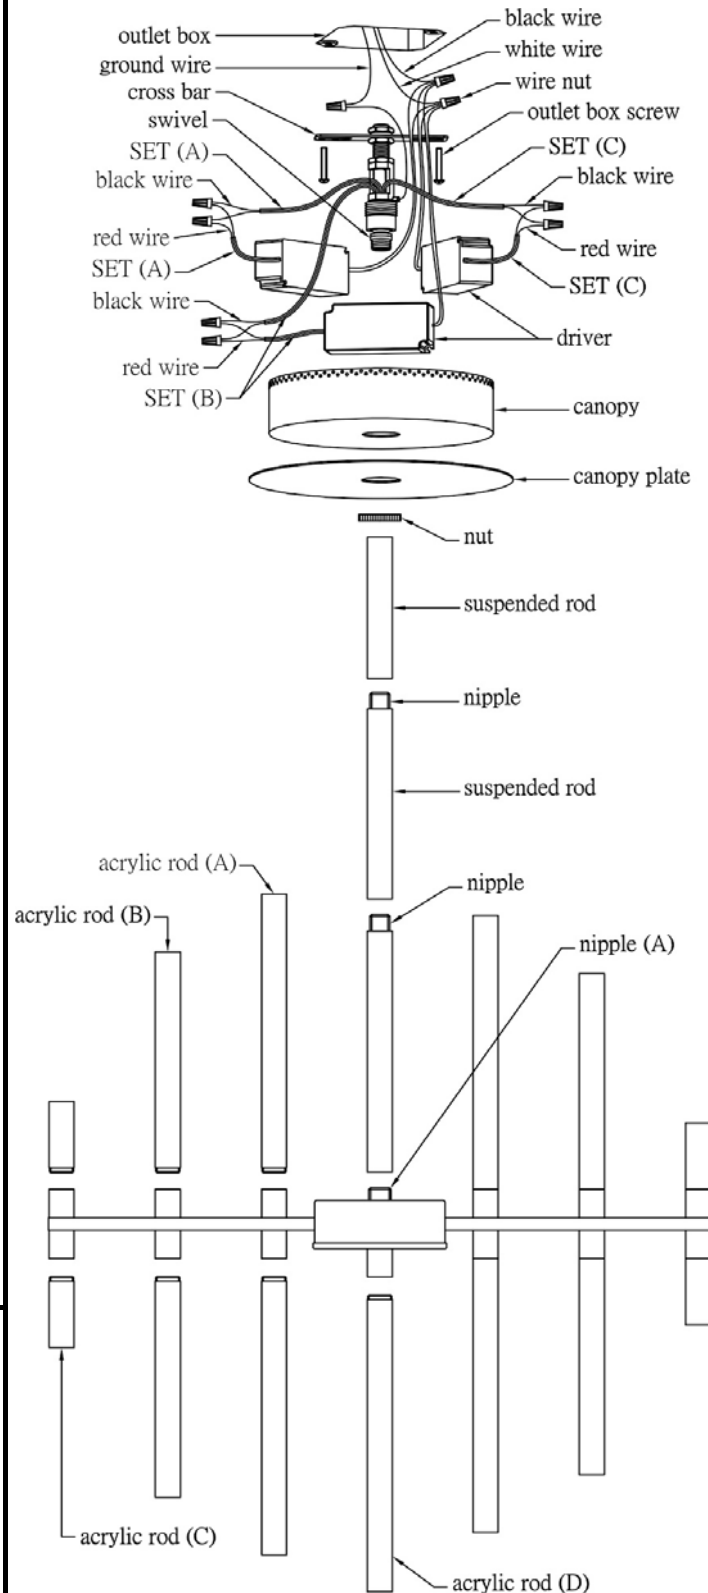

OXYGEN LIGHTING ©

oxygen

MIRO Chandelier
120v: 3-605-xx

**ASSEMBLY
INSTRUCTIONS**