
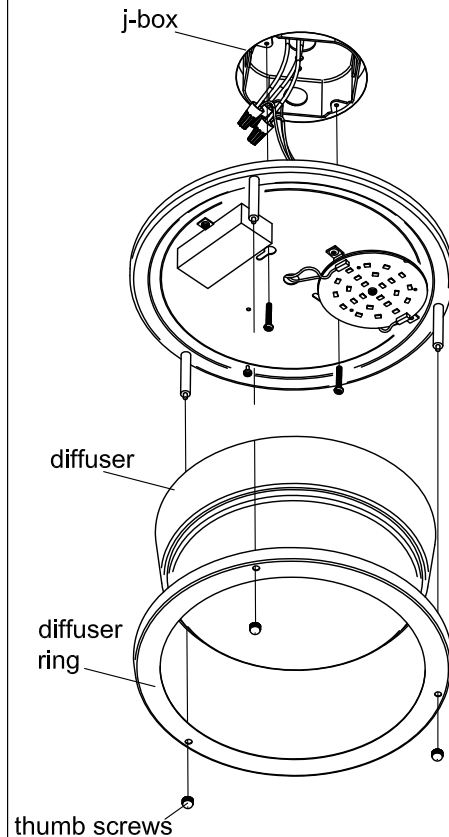


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.**

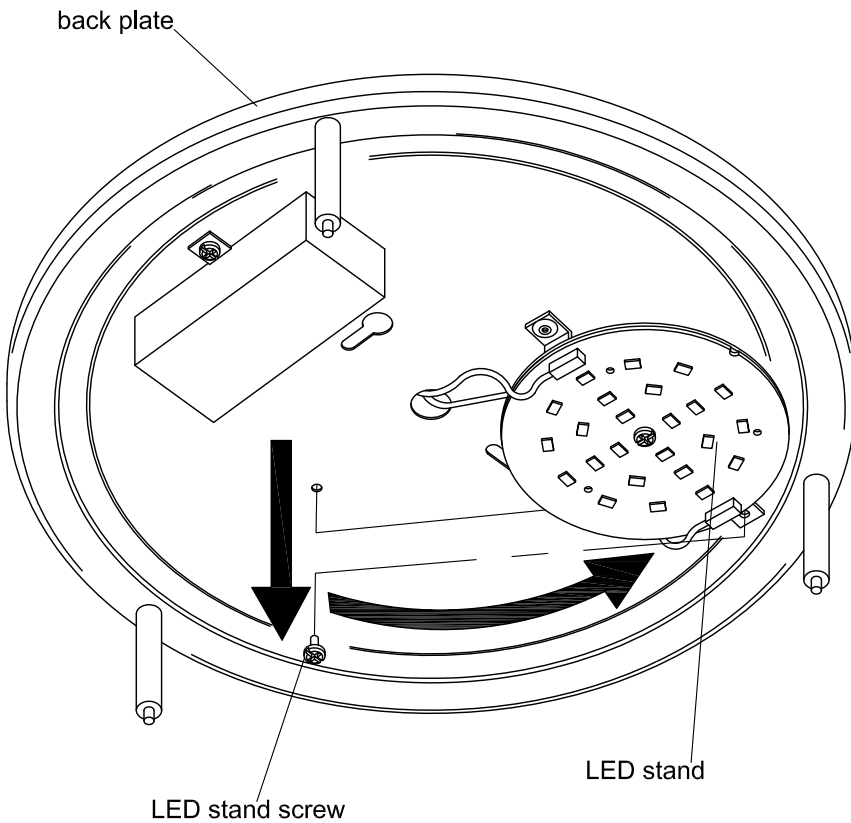

## Installation Steps

- Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
- Remove the three thumb screws to release the back plate, diffuser and diffuser ring.
- Remove screw from LED stand and swivel array to access the mounting holes. (Illustrated) Take care not to pull wires out of LED. Do not remove center screw from LED stand.
- Make wire connections. Attach ground wire to building ground wire using a wire nut.
  - FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box. Some suggested dimmers below.

This list of dimmers does not imply any guarantee or warranty of compatibility with a particular application. The lack of dimmers on this list does not imply it is not compatible with our drivers.

Due to the high degree of variability when dimming, all applications should be evaluated prior to installation to ensure it meets expectations.

oxygen

Some Suggested Dimmers

0-10V		ELV(Reverse phase)	
Leviton	a-2000	Leviton	Sunslide 6615-POW
Leviton	IP710	Lutron	Skylark SELV-300P
Leviton	Renior II(W/0-10v setting)	Lutron	Divi DVELV-300P
Lutron	Divi DDTV	Lutron	Maestro MAELV-600
Lutron	Nova NDTV	Lutron	Nova NTELV-600
Douglas Lighting	WPN-5821/5822	Lutron	Verti VTELV-600
Hunt Dimming	PS-LED-010-120V		
Hunt Dimming	PS-LED-010-3W-120V		
Hunt Dimming	PS-LED-010-277V		
Hunt Dimming	PS-LED-010-3W-277V		
Wattstopper, Inc.	ADF-120277		

- FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Wire positive wire with positive wire, negative wire with negative wire. Double check wiring. Tuck the wire connections neatly into the junction box.

- Secure the back plate to the ceiling with j-box screws.
- Swivel LED stand back to original position and reinstall screw. Take care not to crush LED wires.
- Replace diffuser and diffuser ring and secure with thumb screws.
- Turn power back on at fuse or circuit box.

**NAME location**  
 120v **3-618-xx**  
 277v **37-618-xx**

OXYGEN LIGHTING ©

**oxygen**

**OXYGEN LIGHTING**  
 201 RAILHEAD RD., FORT WORTH, TX 76106  
 TEL. (877) 607-0202 FAX (877) 607-0203  
 WWW.OXYGENLIGHTING.COM

**ASSEMBLY INSTRUCTIONS**