


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

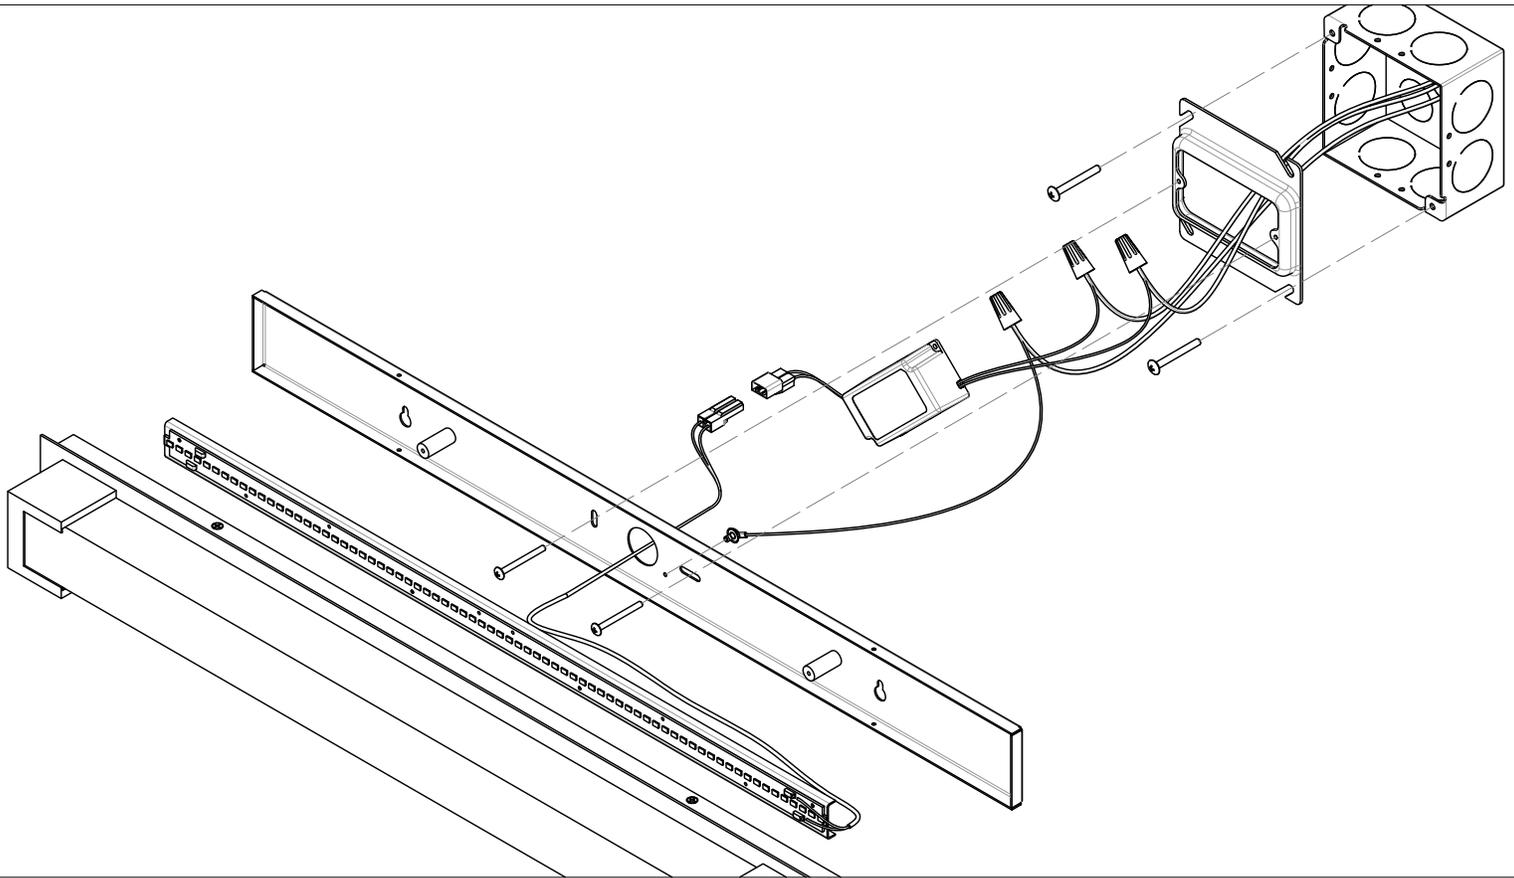

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
2. Remove the four fixture housing screws to release the back plate. Remove back plate from fixture.
3. Gently place driver in j-box. Be sure to leave the orange connector accessible.
4. Make wire connections. Attach ground wire to building wire using a wire nut.

- **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Note: For phase dimming, cap off gray and purple wires as they are only used for 0-10V dimming. Double check wiring. Tuck the wire connections neatly into the junction box.

- **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Wire neutral (white) wire with neutral wire, hot (black) wire with hot wire. Double check wiring.

5. Attach back plate to j-box with j-box screws. Connect the orange connectors together and gently tuck them into the j-box.
6. Place the fixture body onto the back plate. Secure the housing to the back plate using the four fixture housing screws provided.
7. Turn power back on at fuse or circuit box.

**Orion vanity
3-543-xx**

OXYGEN LIGHTING ©

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS