

Installation instruction #3-404-15 For Style 3-404-15

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) LED 12W Maximum(Include).

Estimated Assembly Time: 15-30 minutes


Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.
These instructions are provided for your safety. It is very important you read them completely before installing the fixture.
We strongly recommend that a licensed, professional electrician perform the installation.

Package Contents


Rem ove bubble mailer before proceeding with installation

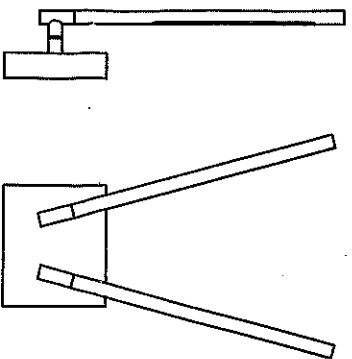

AA Fixture Body x1


STEP 1

A. Use the mounting screws to attach the mounting unit to the junction box




Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	3pcs
CC	Outlet Box Screw	2pcs
DD	Lamp arm*L318mm	2pcs
EE	Fixture	1pcs

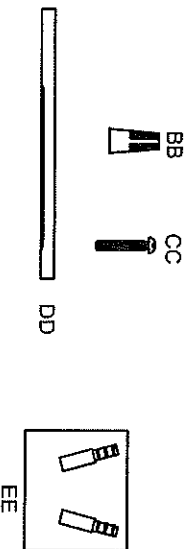

STEP 2

A. Connect the light emitting tube to the main body

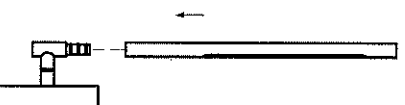

STEP 3


A. TURN OFF POWER AT FUSE PANEL BEFORE INSTALLATION

Make wire connections using wire nuts

provided. Attach ground wire to building ground wire


provided. Building white wire(neutral) with fixture white wire and

building black (hot) wire to fixture black wire

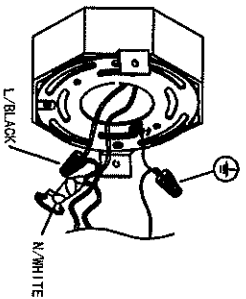


STEP 5

A. Lock the screw.

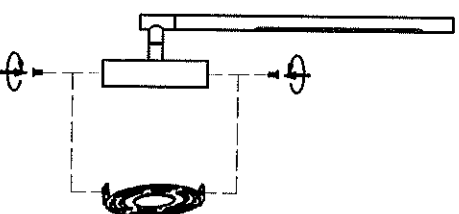

STEP 4

A. Select desired color temperature using the CCT switch(3000k, 3500k or 4000k)

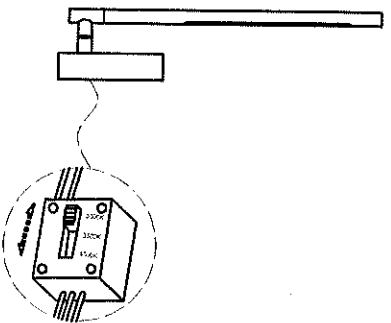

STEP 6

