


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

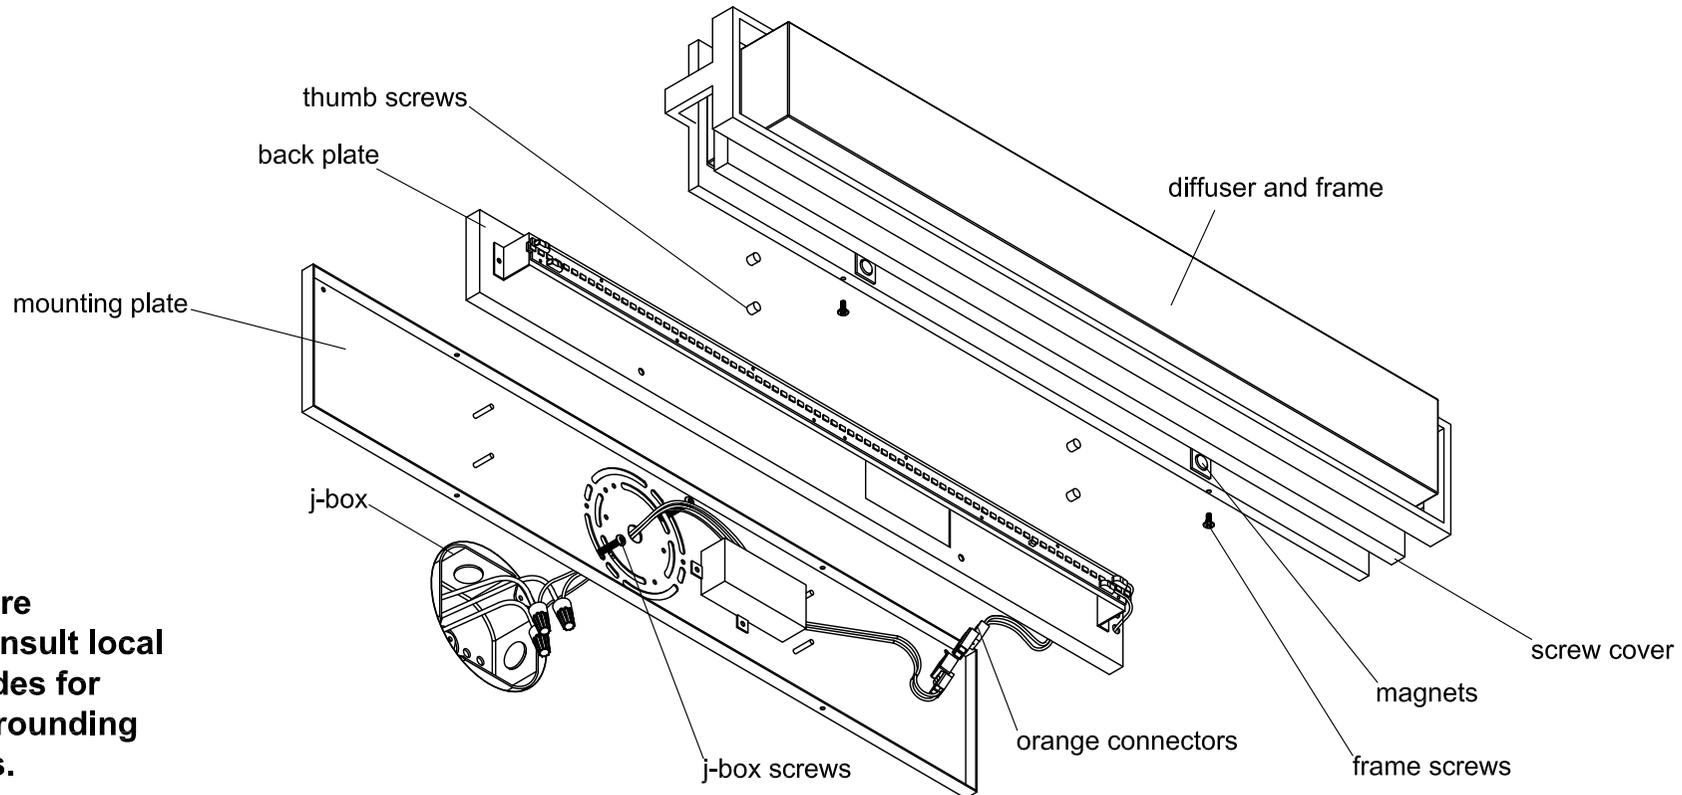

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clean surface. Take care not to lose any small parts necessary for installation
2. Firmly from both ends of the fixture pull screw cover towards front of diffuser to access frame screws. Remove the four frame screws and pull mounting plate with back plate out of the back of the diffuser.
3. Remove the four thumb screws from back plate and disconnect orange connectors.
4. Make wire connections: Attach ground wire to building ground wire using a wire nut or attach them to the mounting plate with a green ground screw.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections except for the orange connector neatly into the junction box.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Wire hot wire with hot wire, neutral wire with neutral wire. Double check wiring. Tuck the wire connections except the orange connector neatly into the junction box.
5. Secure the mounting plate to the wall over the j-box by installing the j-box. Mounting plate should be secure against wall.
6. Reconnect the orange connectors and place the back plate over the mounting plate and reinstall the four thumb screws.
7. Place the diffuser and frame over the back plate and reinstall the four frame screws. Replace the screw cover over the magnets.
8. Turn power back on at fuse or circuit box.

PLATO vanity
120v **3-534-xx**
277v **37-534-xx**

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD., FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS