

Assembly Instruction Sheet #3-809-15 & 40

Tools Required: Flathead screwdriver, Phillips screwdriver, Pliers, wire cutters, wire strippers, electrical tape, safety glasses. **Light Source:** (1) LED 22W Maximum (Included).

Estimated Assembly Time: 15-30 minutes.

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagram below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

Before this step there should be taken off the bubble mailer.




PART	DESCRIPTION	QUANTITY
A	Lamp body	1 pcs
B	Glass lampshade	1 pcs
C	Wire Nut	3 pcs
D	Outlet Box Screw	2 pcs

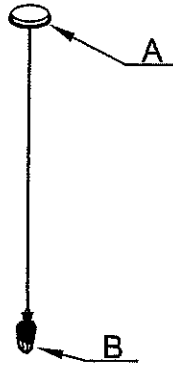

STEP 1

A. Use the mounting screws to attach the mounting unit to the junction box.



STEP 2

Please turn off the power before installing this step. Connect the fixture wire as follows:
Supplied wire nut (C)



STEP 3

Connect the lamp body (A) to the junction box (not included) and provide two outlet box screws (D)



STEP 4

Glass lampshade (B) Up knob into lamp body (A)



STEP 5

Please turn on the power

