

**SFP-16GB-DW41-40-C-OPC**

Cisco® Compatible TAA 16GBase-DWDM FC SFP+ Transceiver C-Band 100GHz (SMF, 1544.53nm, 40km, LC, DOM)

**Features**

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Cooled EML transmitter and PIN receiver
- Single-mode Fiber
- Commercial Temperature 0 to 70 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free

**Applications:**

- 16x Gigabit Ethernet over DWDM
- 8x/10x Fibre Channel
- Access, Metro and Enterprise

**Product Description**

This Cisco® compatible SFP+ transceiver provides 16GBase-DWDM Fibre Channel throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1544.53nm via an LC connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Cisco®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

### Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4.
- ESD to the LC Receptacle: compatible with IEC 61000-4-3.
- EMI/EMC: compatible with FCC Part 15 Subpart B Rules, EN55022:2010.
- Laser Eye Safety: compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1, 2.
- RoHS: compliant with EU RoHS 2.0 directive 2015/863/EU.

### Wavelength Guide (100GHz ITU-T Channel)

| Channel # | Frequency (THz) | Center Wavelength (nm) |
|-----------|-----------------|------------------------|
| 17        | 191.7           | 1563.86                |
| 18        | 191.8           | 1563.05                |
| 19        | 191.9           | 1562.23                |
| 20        | 192.0           | 1561.42                |
| 21        | 192.1           | 1560.61                |
| 22        | 192.2           | 1559.79                |
| 23        | 192.3           | 1558.98                |
| 24        | 192.4           | 1558.17                |
| 25        | 192.5           | 1557.36                |
| 26        | 192.6           | 1556.55                |
| 27        | 192.7           | 1555.75                |
| 28        | 192.8           | 1554.94                |
| 29        | 192.9           | 1554.13                |
| 30        | 193.0           | 1553.33                |
| 31        | 193.1           | 1552.52                |
| 32        | 193.2           | 1551.72                |
| 33        | 193.3           | 1550.92                |
| 34        | 193.4           | 1550.12                |
| 35        | 193.5           | 1549.32                |
| 36        | 193.6           | 1548.51                |
| 37        | 193.7           | 1547.72                |
| 38        | 193.8           | 1546.92                |
| 39        | 193.9           | 1546.12                |
| 40        | 194.0           | 1545.32                |
| 41        | 194.1           | 1544.53                |
| 42        | 194.2           | 1543.73                |
| 43        | 194.3           | 1542.94                |
| 44        | 194.4           | 1542.14                |

|    |       |         |
|----|-------|---------|
| 45 | 194.5 | 1541.35 |
| 46 | 194.6 | 1540.56 |
| 47 | 194.7 | 1539.77 |
| 48 | 194.8 | 1538.98 |
| 49 | 194.9 | 1538.19 |
| 50 | 195.0 | 1537.40 |
| 51 | 195.1 | 1536.61 |
| 52 | 195.2 | 1535.82 |
| 53 | 195.3 | 1535.04 |
| 54 | 195.4 | 1534.25 |
| 55 | 195.5 | 1533.47 |
| 56 | 195.6 | 1532.68 |
| 57 | 195.7 | 1531.90 |
| 58 | 195.8 | 1531.12 |
| 59 | 195.9 | 1530.33 |
| 60 | 196.0 | 1529.55 |
| 61 | 196.1 | 1528.77 |

#### Absolute Maximum Ratings

| Parameter                  | Symbol           | Min. | Typ.   | Max. | Unit | Notes |
|----------------------------|------------------|------|--------|------|------|-------|
| Maximum Supply Voltage     | V <sub>cc</sub>  | -0.5 |        | 4.5  | V    |       |
| Storage Temperature        | T <sub>stg</sub> | -40  |        | 85   | °C   |       |
| Operating Case Temperature | T <sub>c</sub>   | 0    |        | 70   | °C   |       |
| Operating Humidity         | RH               | 5    |        | 95   | %    |       |
| Data Rate                  | BR               | 4.25 | 14.025 |      | Gbps |       |

## Electrical Characteristics

| Parameter                      |         | Symbol           | Min.  | Typ. | Max.            | Unit | Notes |
|--------------------------------|---------|------------------|-------|------|-----------------|------|-------|
| Power Supply Voltage           |         | V <sub>CC</sub>  | 3.135 | 3.30 | 3.465           | V    |       |
| Power Supply Current           |         | I <sub>CC</sub>  |       |      | 550             | mA   |       |
| Transmitter                    |         |                  |       |      |                 |      |       |
| Differential Data Input Swing  |         | V <sub>IN</sub>  | 180   |      | 850             | mV   | 1     |
| Input Differential Impedance   |         | Z <sub>IN</sub>  | 90    | 100  | 110             | Ω    |       |
| Tx_Disable                     | Disable | V <sub>IH</sub>  | 2.0   |      | V <sub>CC</sub> | V    |       |
|                                | Enable  | V <sub>IL</sub>  | 0     |      | 0.8             | V    |       |
| Tx_Fault                       | Fault   | V <sub>OH</sub>  | 2.0   |      | V <sub>CC</sub> | V    |       |
|                                | Normal  | V <sub>OL</sub>  | 0     |      | 0.8             | V    |       |
| Receiver                       |         |                  |       |      |                 |      |       |
| Differential Data Output Swing |         | V <sub>OUT</sub> | 300   |      | 900             | mV   | 2     |
| LOS                            | High    |                  | 2.0   |      | V <sub>CC</sub> | V    |       |
|                                | Low     |                  |       |      | 0.8             | V    |       |

### Notes:

1. PECL input. Internally AC-coupled and terminated.
2. Internally AC-coupled.

## Optical Characteristics

| Parameter                   |  | Symbol           | Min.    | Typ. | Max.    | Unit | Notes |
|-----------------------------|--|------------------|---------|------|---------|------|-------|
| Transmitter                 |  |                  |         |      |         |      |       |
| Center Wavelength           |  | λ <sub>C</sub>   | 1528.77 |      | 1563.86 | nm   |       |
| Spectral Width (-20dB)      |  | Δλ               |         |      | 1       | nm   |       |
| Side-Mode Suppression Ratio |  | SMSR             | 30      |      |         | dB   |       |
| Average Output Power        |  | P <sub>OUT</sub> | -1      |      | 3       | dBm  | 1     |
| Extinction Ratio            |  | ER               | 8.2     |      |         | dB   |       |
| Receiver                    |  |                  |         |      |         |      |       |
| Center Wavelength           |  | λ <sub>C</sub>   | 1260    |      | 1620    | nm   |       |
| Receiver Sensitivity        |  | S                |         |      | -14     | dBm  | 2     |
| Receiver Overload           |  | POL              | 0.5     |      |         | dBm  | 2     |
| LOS De-Assert               |  | LOSD             |         |      | -15     | dBm  |       |
| LOS Assert                  |  | LOSA             | -28     |      |         | dBm  |       |
| LOS Hysteresis              |  | LOSH             | 0.5     |      |         | dB   |       |

**Notes:**

1. The optical power is launched into the SMF.
2. Measured with a PRBS  $2^{31}-1$  test pattern @14025Mbps, BER  $\leq 1 \times 10^{-12}$ .

**Timing and Electrical Specifications**

| Parameter                                      | Symbol         | Min. | Typ. | Max. | Unit    |
|------------------------------------------------|----------------|------|------|------|---------|
| Tx_Negate Time                                 | T_on           |      |      | 2    | ms      |
| Tx_Disable Assert Time                         | T_off          |      |      | 100  | $\mu$ s |
| Time To Initialize Including Reset of Tx_Fault | T_init         |      |      | 300  | ms      |
| Tx_Fault Assert Time                           | T_fault        |      |      | 100  | $\mu$ s |
| Tx_Disable To Reset                            | T_reset        | 10   |      |      | $\mu$ s |
| LOS Assert Time                                | T_loss_on      |      |      | 100  | $\mu$ s |
| LOS De-Assert Time                             | T_loss_off     |      |      | 100  | $\mu$ s |
| Serial ID Clock Rate                           | T_serial_clock |      | 100  | 400  | KHz     |
| MOD_DEF (0:2) - High                           | VOH            | 2    |      | Vcc  | V       |
| MOD_DEF (0:2) - Low                            | VOL            |      |      | 0.8  | V       |


**Pin Descriptions**

| Pin | Symbol     | Name/Descriptions                                                          | Ref. |
|-----|------------|----------------------------------------------------------------------------|------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground).                          | 1    |
| 2   | Tx_Fault   | Transmitter Fault. LVTTTL-O.                                               | 2    |
| 3   | Tx_Disable | Transmitter Disable. Laser output disabled on "high" or "open." LVTTT-I.   | 3    |
| 4   | SDA        | 2-Wire Serial Interface Data (Same as MOD-DEF2 in INF-8074i). LVTTTL-I/O.  |      |
| 5   | SCL        | 2-Wire Serial Interface Clock (Same as MOD-DEF2 in INF-8074i). LVTTTL-I.   |      |
| 6   | MOD_ABS    | Module Absent. Connect to VeeT or VeeR in the module.                      | 4    |
| 7   | RS0        | Rate Select 0. Not Used.                                                   | 5    |
| 8   | LOS        | Loss of Signal Indication. "Logic 0" indicates normal operation. LVTTTL-O. | 2    |
| 9   | RS1        | Rate Select 1. Not Used.                                                   | 5    |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                          | 1    |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                          | 1    |
| 12  | RD-        | Receiver Inverted Data Out. AC Coupled. CML-O.                             |      |
| 13  | RD+        | Receiver Non-Inverted Data Out. AC Coupled. CML-O.                         |      |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                          | 1    |
| 15  | VccR       | Receiver Power Supply.                                                     |      |
| 16  | VccT       | Transmitter Power Supply.                                                  |      |

|    |      |                                                      |   |
|----|------|------------------------------------------------------|---|
| 17 | VeeT | Transmitter Ground (Common with Receiver Ground).    | 1 |
| 18 | TD+  | Transmitter Non-Inverted Data In. AC Coupled. CML-I. |   |
| 19 | TD-  | Transmitter Inverted Data In. AC Coupled. CML-O.     |   |
| 20 | VeeT | Transmitter Ground (Common with Receiver Ground).    | 1 |


**Notes:**

1. The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
2. This contact is an open collector/drain output and should be pulled up to the Host\_Vcc with resistor in the range 4.7kΩ to 10kΩ. Pull-ups can be connected to one or several power supplies; however, the host board design shall ensure that no module contract has voltage exceeding module VccT/R+0.5V.
3. Tx\_Disable is an input contact with a 4.7kΩ to 10kΩ pull-up resistor to VccT inside the module.
4. MOD\_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull the contract up to Host\_Vcc with a resistor in the range from 4.7kΩ to 10kΩ. MOD\_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
5. Internally pulled down per SFF-8431.

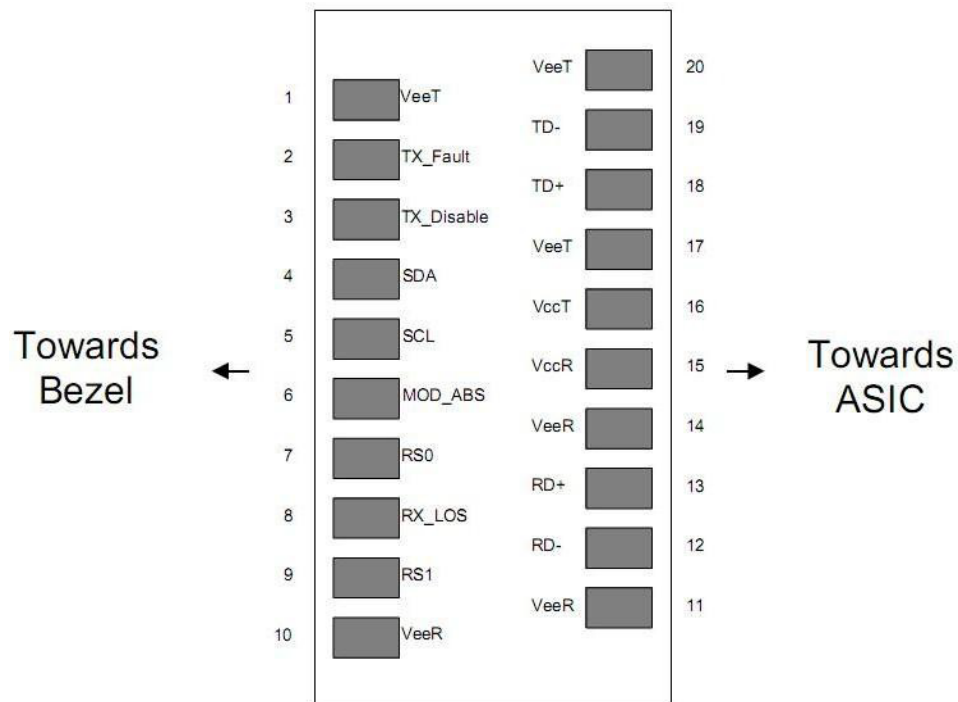


Pin-Out of Connector Block on the Host Board


## Transceiver Functional Diagram

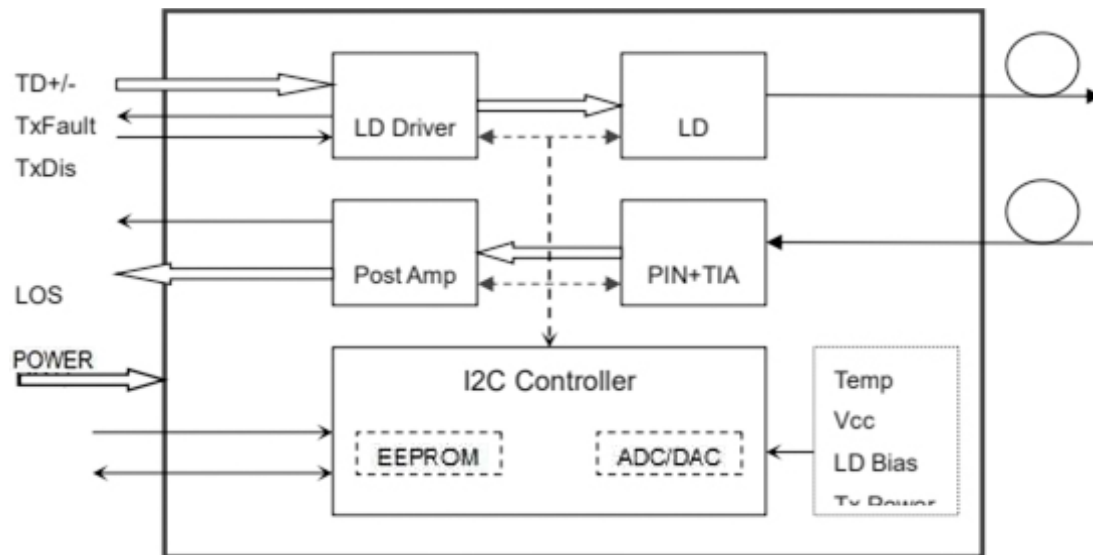

### Recommended Interface Circuit Schematic

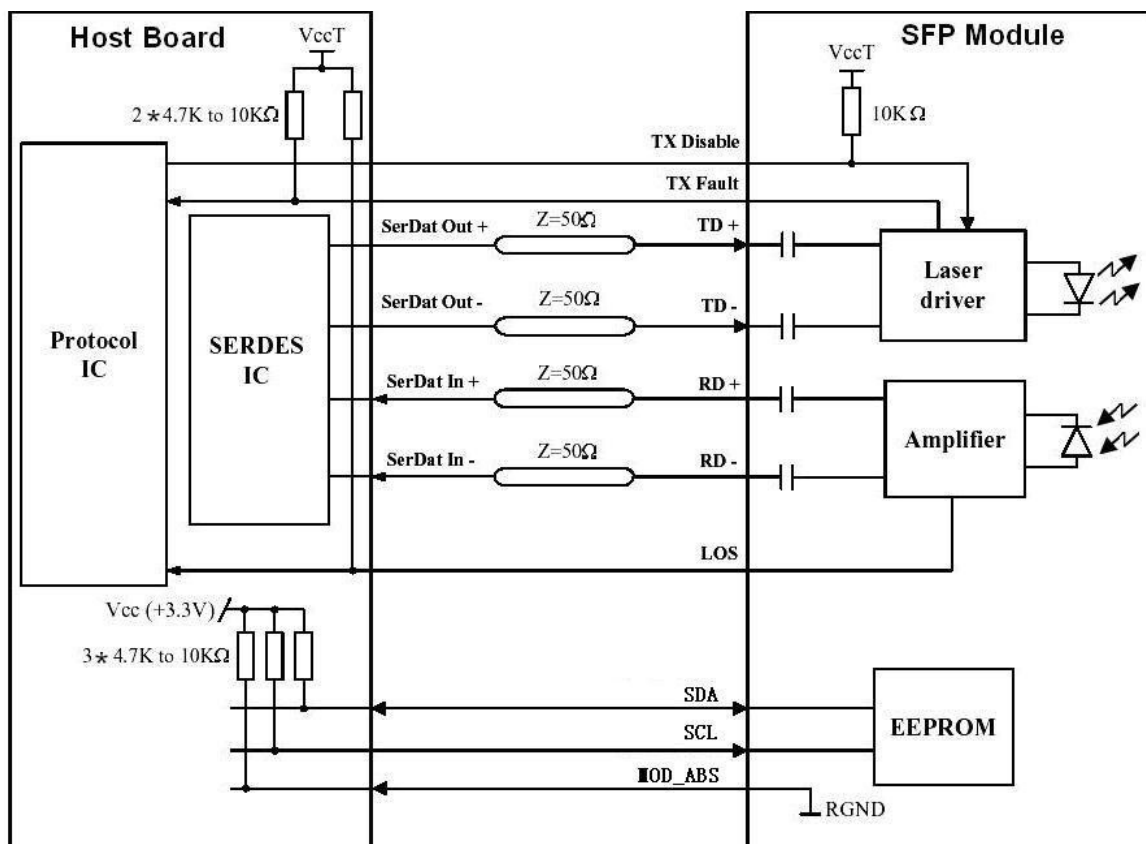

Mechanical Specifications

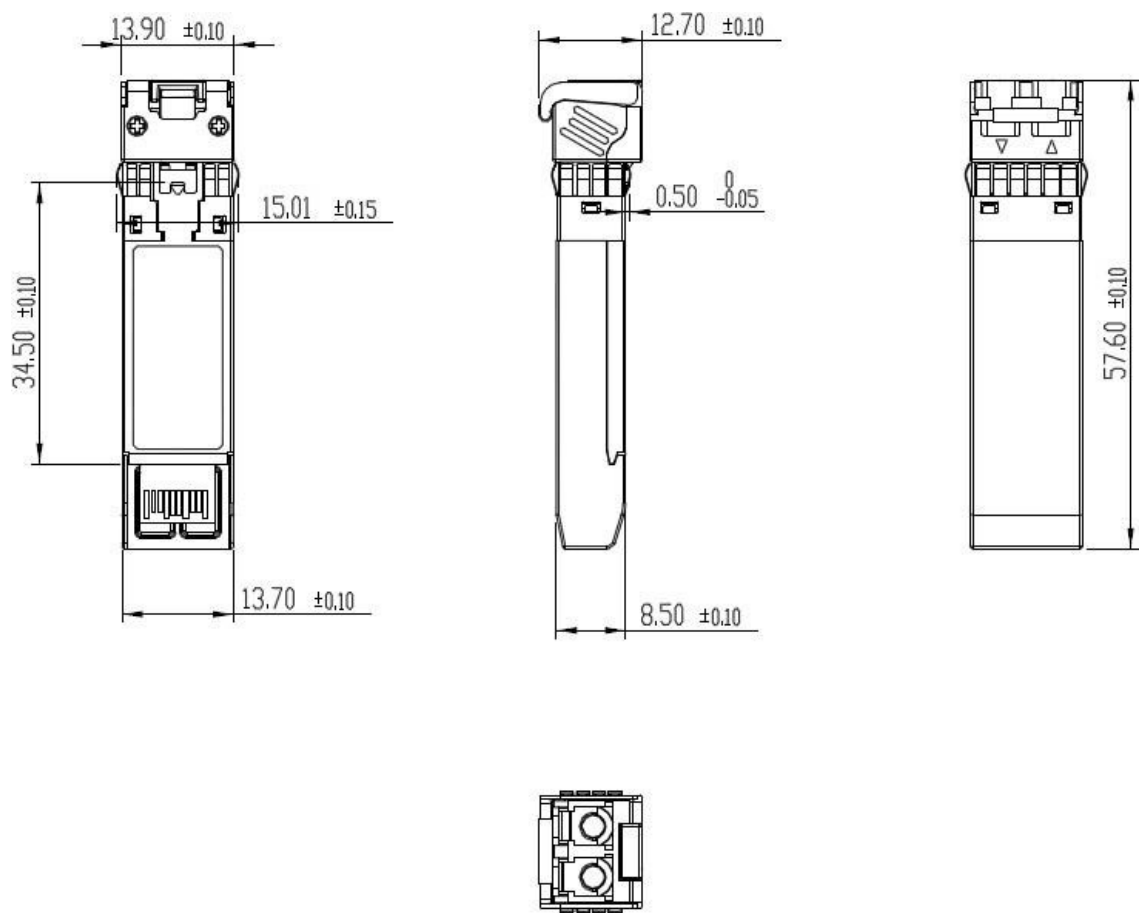

EEPROM Information

EEPROM memory map-specific data field description is as below:

| 2 wire address 1010000X (A0h) |                                         | 2 wire address 1010001X (A2h) |                                           |
|-------------------------------|-----------------------------------------|-------------------------------|-------------------------------------------|
| 0                             | Serial ID Defined by SFP MSA (96 bytes) | 0                             | Alarm and Warning Thresholds (56 bytes)   |
| 95                            |                                         | 55                            | Cal Constants (40 bytes)                  |
| 127                           |                                         | 95                            | Real Time Diagnostic Interface (24 bytes) |
|                               | Vendor Specific (32 bytes)              | 119                           | Vendor Specific (8 bytes)                 |
| 255                           |                                         | 127                           | User Writable EEPROM (120 bytes)          |
|                               | Reserved, SFF8079 (128 bytes)           | 247                           |                                           |
|                               |                                         | 255                           | Vendor Specific (8 bytes)                 |



## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

