

QS200 SADDLE SERIES

INSERTION ULTRASONIC FLOW SENSOR



SPECIFICATIONS

Technology:	Ultrasonic
Line Size:	6 in., 8 in, 10 in, 12 in.
Accuracy (% of Reading):	Typically $\pm 2\%$
Fitting Type:	Saddle
Flow Range:	0.1 to 15 fps (0.03 to 4.6 m/s)
Transducer Excitation:	Supply Voltage: 7.5V (DC) min. to 36V (DC) max Quiescent Current: 200 μ A (typical)
Operating Pressure:	150 psi @ 73°F (10 bar @ 23°C) 100 psi @ 140°F (7 bar @ 60°C)
Operating Temperature:	32°F to 140°F (0°C to 60°C)
Insert Wetted Materials:	Body: PPS (Ryton® R-4) Sensor: PEI (Ultem 1000) O-Ring: EPDM
Out Frequency:	0 to 100 Hz
Output Pulse Width:	4 ms
Electrical Cable for Insert Electronics:	36 inches (91.4 cm) of 18 AWG, solid copper, "Direct Burial" (UL 493 & 83)

APPROVALS / WARRANTY

IP68 CE



SADDLE FOR LARGE PIPE SIZES

The 6, 8, 10, and 12 inch saddles are designed exclusively for the **QS200 Insertion Ultrasonic Flow Sensor**. Supporting commercial and agricultural irrigation applications on large size pipes, the QS200 will accurately provide the information your controller needs to display the flow rate and accumulative total.

FEATURES / BENEFITS

- Low-cost, effective and easy installation
- No moving mechanical parts (low-maintenance)
- Conventional Irrigation: Two-wire connection (for power and pulse)
- Compatible with irrigation controllers (common name brands)
- High accuracy: $\pm 2.0\%$ of reading (compared to full scale accuracy)
- Provides extended leak detection down to 0.1 fps (0.03 m/s)
- LED light indicators: (green for power and amber for pulse)
- Patented design
- Ideal for clean water flow measurement
- External wiring: direct burial wire

INSERT DESCRIPTION

Designed for above and below grade applications, such as irrigation, municipal and underground monitoring where the flow rates are between 0.1 to 15 fps (0.03 to 4.6 m/s) and temperatures are below 140°F (60°C). QS200 inserts are supplied with two single conductors, 18 AWG solid copper wire leads that are 36 inches (91.4 cm) in length with UL Style 116666 direct burial insulation.

APPLICATIONS (Typical application but not limited to)

- Turf / Landscape Irrigation Systems
- Agriculture Irrigation
- Micro Irrigation Systems
- Greenhouse and Grow house
- Groundwater Monitoring
- Reclaimed (Recycled) Water
- Greywater



Wichita · Sydney

GREAT PLAINS INDUSTRIES



SADDLE ONLY SELECTION CHART




Representation
of contents

Model Part Number	Description	Pipe Outside Diameter (in.)	Operating Flow Range	Maximum Water Pressure**	Meter Material	Gasket Material	Saddle Material	Clamp Material
146080-01	6 in. Pipe (NPS/IPS)	6.625	.1 to 15 ft/sec (9 to 1350 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-02	8 in. Pipe (NPS/IPS)	8.625	.1 to 15 ft/sec (15 to 2300 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-03	10 in. Pipe (NPS/IPS)	10.750	.1 to 15 ft/sec (24 to 3650 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-04	12 in. Pipe (NPS/IPS)	12.750	.1 to 15 ft/sec (35 to 5300 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-05	6 in. Tube	6.000	.1 to 15 ft/sec (8 to 1230 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-06	8 in. Tube	8.000	.1 to 15 ft/sec (15 to 2200 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-07	10 in. Tube	10.000	.1 to 15 ft/sec (23 to 3500 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-08	12 in. Tube	12.000	.1 to 15 ft/sec (34 to 5100 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-09	6 in. PIP	6.140	.1 to 15 ft/sec (8 to 1230 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-10	8 in. PIP	8.160	.1 to 15 ft/sec (15 to 2200 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-11	10 in. PIP	10.200	.1 to 15 ft/sec (23 to 3500 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel
146080-12	12 in. PIP	12.240	.1 to 15 ft/sec (34 to 5100 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	N/A	Silicone	Aluminum	Stainless Steel

*Nominal flow rate shown. Actual flow is dependent on pipe schedule (wall thickness).

** Maximum water pressure for larger line sizes would be based on the material of the flow sensor, adapter, and pipe. Pressure is also de-rated due to temperature (1.20 psi / °F).

SADDLE WITH SENSOR SELECTION CHART



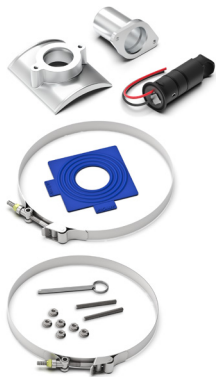


Representation
of contents


Model Part Number	Description	Pipe Outside Diameter (in.)	Operating Flow Range	Maximum Water Pressure**	Meter Material	Gasket Material	Saddle Material	Clamp Material
146090-01	6 in. Pipe (NPS/IPS)	6.625	.1 to 15 ft/sec (9 to 1350 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-02	8 in. Pipe (NPS/IPS)	8.625	.1 to 15 ft/sec (15 to 2300 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-03	10 in. Pipe (NPS/IPS)	10.750	.1 to 15 ft/sec (24 to 3650 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-04	12 in. Pipe (NPS/IPS)	12.750	.1 to 15 ft/sec (35 to 5300 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-05	6 in. Tube	6.000	.1 to 15 ft/sec (8 to 1230 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-06	8 in. Tube	8.000	.1 to 15 ft/sec (15 to 2200 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-07	10 in. Tube	10.000	.1 to 15 ft/sec (23 to 3500 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-08	12 in. Tube	12.000	.1 to 15 ft/sec (34 to 5100 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-09	6 in. PIP	6.140	.1 to 15 ft/sec (8 to 1230 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-10	8 in. PIP	8.160	.1 to 15 ft/sec (15 to 2200 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-11	10 in. PIP	10.200	.1 to 15 ft/sec (23 to 3500 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel
146090-12	12 in. PIP	12.240	.1 to 15 ft/sec (34 to 5100 GPM)*	150 PSI @ 73°F (10 bar @ 23°C)	Ryton®	Silicone	Aluminum	Stainless Steel

*Nominal flow rate shown. Actual flow is dependent on pipe schedule (wall thickness).

** Maximum water pressure for larger line sizes would be based on the material of the flow sensor, adapter, and pipe. Pressure is also de-rated due to temperature (1.20 psi / °F).

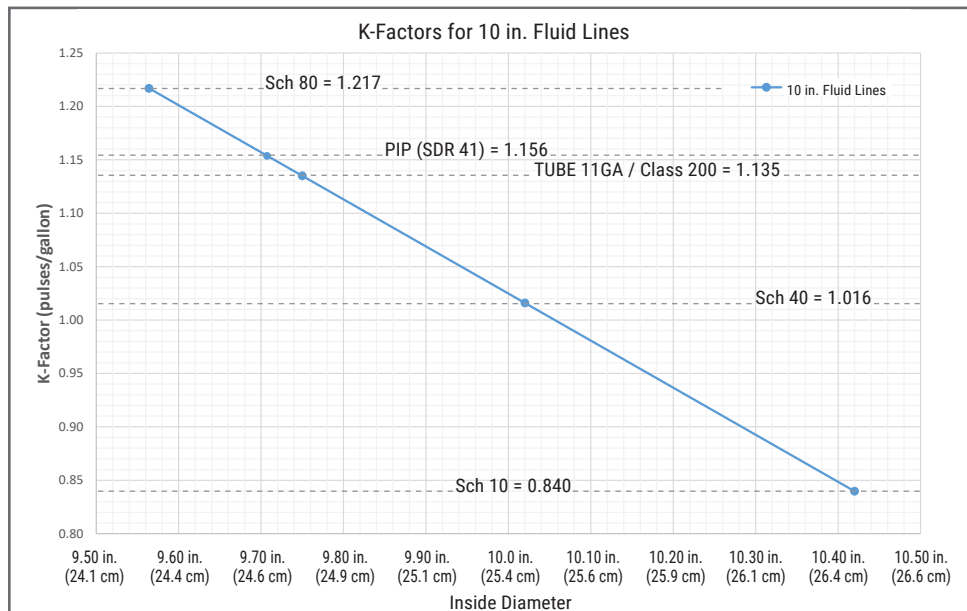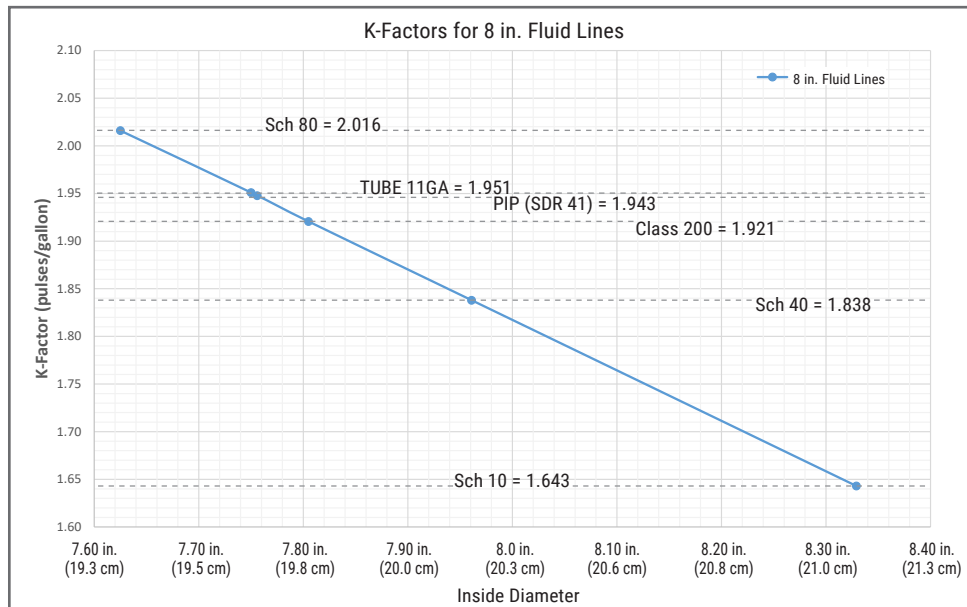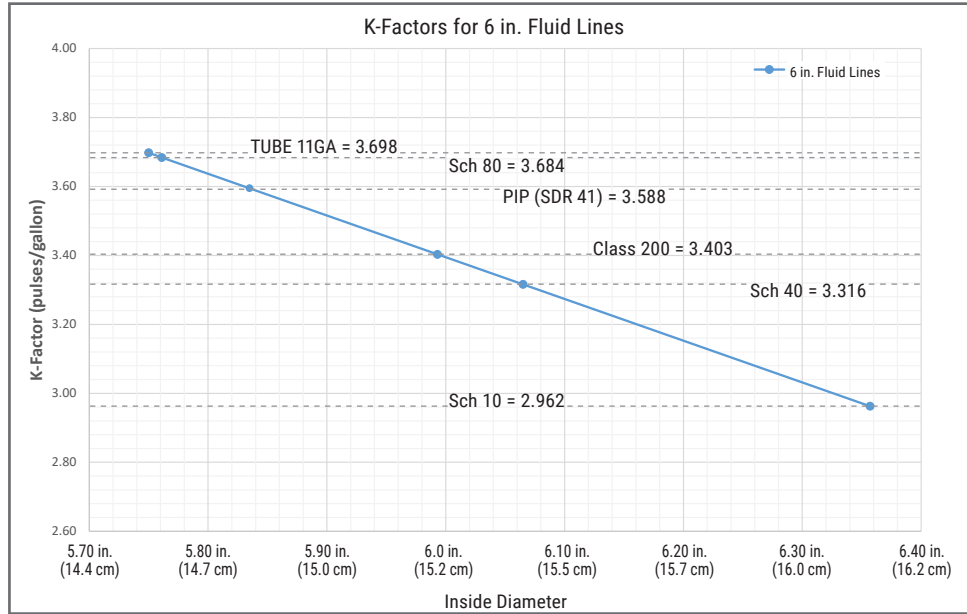


K-FACTORS CONTINUED

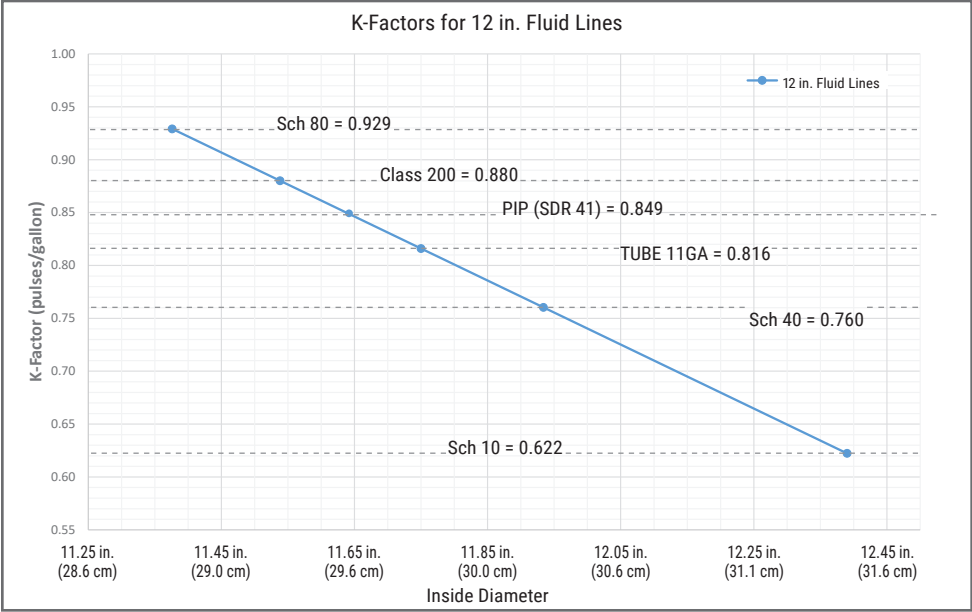


DIMENSIONS

	Dimension "A"	Dimension "B"	Dimension "C"
QS200 INSERT	2.0 in. (5.1 cm)	2.0 in. (5.1 cm)	5.2 in. (13.2 cm)
SADDLE	5.3 in. (13.5 cm)	4.3 in. (10.9 cm)	3.9 in. (9.9 cm)

QS200 INSERT

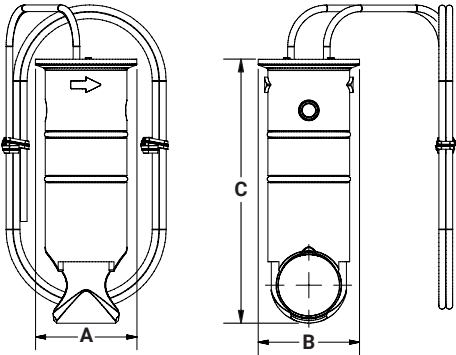

SADDLE

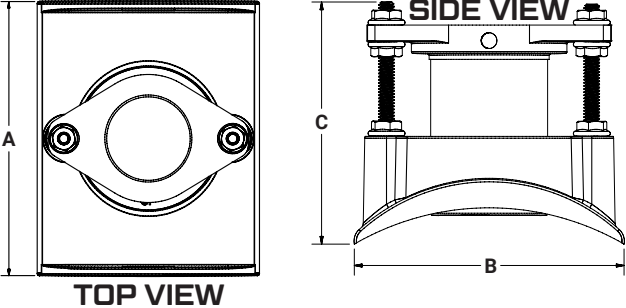

SADDLE FAMILY LINE-UP (Shown on pipe. Pipe not included.)