

PURE SINE WAVE INVERTERS (2000/3000)

CATEGORY:

PURE SINE WAVE INVERTERS

MODEL RANGE:

GP-ISW2000

GP-ISW3000

IDEAL FOR:



GP-ISW3000

GP-ISW2000



2 YEAR WARRANTY

GP-ISW2000 / GP-ISW3000

Premium mobile power in a sleek, lightweight profile. Bring reliable, cUL-certified power on the road with Go Power!'s Industrial Pure Sine Wave Inverter.

KEY FEATURES



AC POWER FOR OPTIMAL
PERFORMANCE



WIDE VOLTAGE RANGE



RUNS ANY DEVICE
IN WATTAGE RANGE
WITHOUT INTERFERENCE



POWERSAVE MODE



FULL OVERLOAD
PROTECTION



AVAILABLE IN 12V AND 24V



DURABLE, LOW
PROFILE



DUAL GFCI OUTLETS




P: +1 866 247 6527
E: sales@gopowersolar.com
W: gopowersolar.com

201 - 710 Redbrick St, Victoria,
British Columbia, Canada, V8T
5J3

SPECIFICATIONS*	GP-ISW2000	GP-ISW3000
Continuous Output Power	2000 W (VA)	3000 W (VA)
Maximum Surge Rating	3500 W (VA)	6000 W (VA)
Output Waveform	Pure Sine Wave	
Output Voltage Range $\pm 3\%$	100 - 120 VAC (Dip Switch Selectable)	
Input Voltage	12 V: 10.5 - 16.5 VDC 24 V: 21 - 33 VDC	
Efficiency	12 V: 92% 24 V: 93%	12 V: 90% 24 V: 91%
No Load Current Draw / Powersave	12 V: ≤ 1.8 A / < 0.1 A 24 V: ≤ 1.0 A / < 0.05 A	12 V: ≤ 3.8 A / < 0.4 A 24 V: ≤ 2.0 A / < 0.2 A
Input Protection	Over/Under Voltage, Reverse Polarity (Fused)	
Output Protection	Short Circuit, Overload, Over/Under Temperature	
Low Battery Alarm ± 0.3 V (± 0.5 V for 24 V inverters)	12 V: 10.5 V 24 V: 21 V	
Low Battery Shutdown ± 0.3 V (± 0.5 V for 24 V inverters)	12 V: 10.5 V 24 V: 21 V	
Operating Temperature Range	-4°F - 104°F (-20°C - 40°C)	
Storage Temperature Range	-22°F - 158°F (-30°C - 70°C)	
Cooling	Temperature and Load Controller Cooling Fan	
AC Output Connections	Dual GFCI Outlet	Hardwire
Remote Power Option	Yes	
Dimensions (L x W x H)	17.45" x 9.76" x 3.27" (443mm x 248mm x 83mm)	17.40" x 10.04" x 6.22" (442mm x 255mm x 158mm)
Weight	11.55 lbs (5.24 kg)	18.08 lbs (8.2 kg)
Warranty	2 Years	
Inverter Install Kits	12 V: GP-DC-KIT4 24 V: GP-DC-KIT3	12 V: GP-DC-KIT5 24 V: GP-DC-KIT3
Remotes (Optional)	GP-ISW-R / GP-SWR-A	
Regulations and Safety	UL 458, FCC Part 15 Class A	

Note: both 12 V and 24 V inverter specifications are listed.

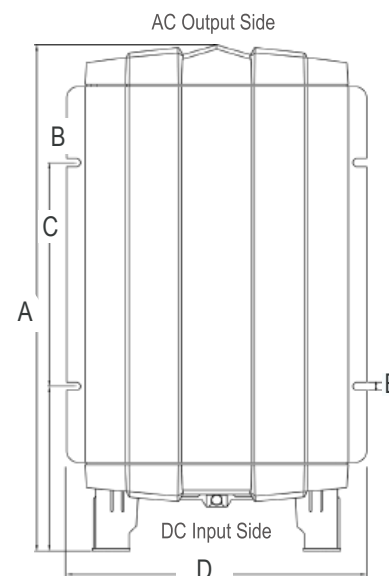

MODEL	A	B	C	D	E
GP-ISW2000	17.44" (443mm)	4.06" (103mm)	7.72" (196mm)	9.76" (248mm)	0.28" (7.0mm)
GP-ISW3000	17.40" (442mm)	4.06" (103mm)	7.72" (196mm)	10.04" (255mm)	0.28" (7.0mm)

PROTECT YOURSELF AND YOUR EQUIPMENT.

FUSE AND CABLE KITS

Go Power! DC installation kits include everything you need to properly connect your Go Power! inverter to the batteries safely. The kit includes 10' large gauge battery cables, tie downs, lugs, and the appropriate inverter fuse (class T fuse) and mounting block.



12 VOLT	INVERTER SIZE
GP-DC-KIT 2	600-1000 W
GP-DC-KIT 3	1100-1800 W
GP-DC-KIT 4	2000-2500 W
GP-DC-KIT 5	2600-3000 W

REMOTELY TURN YOUR INVERTER ON/OFF AND SAVE BATTERY POWER.

INVERTER REMOTE

Remotely power appliances or electronics with the compact Go Power! inverter remote. The remote features an LED indicator showing inverter status, an ON/OFF switch and 25' of cable.



GP-SWR-A

Specifications may be subject to change. Product may not be exactly as shown.
Specifications subject to local environmental conditions.



P: +1 866 247 6527
E: sales@gopowersolar.com
W: gopowersolar.com

201 - 710 Redbrick St, Victoria,
British Columbia, Canada, V8T
5J3