

PURE SINE WAVE INVERTERS (700/1000/1500)

CATEGORY:

PURE SINE WAVE INVERTERS


MODEL RANGE:

GP-ISW700

GP-ISW1000

GP-ISW1500

IDEAL FOR:



GP-ISW700

GP-ISW1000

GP-ISW1500



**2 YEAR
WARRANTY**

GP-ISW700 / GP-ISW1000 / GP-ISW1500

Premium mobile power in a sleek, lightweight profile. Bring reliable, cUL-certified power on the road with Go Power!'s Industrial Pure Sine Wave Inverter.

KEY FEATURES



**AC POWER FOR OPTIMAL
PERFORMANCE**



**RUNS ANY DEVICE
IN WATTAGE RANGE
WITHOUT INTERFERENCE**



**FULL OVERLOAD
PROTECTION**



**DURABLE, LOW
PROFILE**



WIDE VOLTAGE RANGE



POWERSAVE MODE



AVAILABLE IN 12V AND 24V



DUAL GFCI OUTLETS



P: +1 866 247 6527
E: sales@gopowersolar.com
W: gopowersolar.com

201 - 710 Redbrick St, Victoria,
British Columbia, Canada, V8T
5J3

SPECIFICATIONS	GP-ISW700	GP-ISW1000	GP-ISW1500
Continuous Output Power	700 W (VA)	1000 W (VA)	1500 W (VA)
Maximum Surge Rating	1230 W (VA)	1750 W (VA)	2650 W (VA)
Output Waveform	Pure Sine Wave		
Output Voltage Range $\pm 3\%$	100 - 120 VAC (Dip Switch Selectable)		
Input Voltage	12 V: 10.5 - 16.5 VDC 24 V: 21 - 33 VDC		
Efficiency	12 V: 91% 24 V: 93%	12 V: 92% 24 V: 93%	12 V: 91% 24 V: 92%
No Load Current Draw / Powersave	12 V: ≤ 1.5 A / < 0.1 A 24 V: ≤ 0.8 A / < 0.06 A	12 V: ≤ 1.5 A / < 0.1 A 24 V: ≤ 0.8 A / < 0.06 A	12 V: ≤ 1.8 A / < 0.1 A 24 V: ≤ 1.0 A / < 0.05 A
Input Protection	Over/Under Voltage, Reverse Polarity (Fused)		
Output Protection	Short Circuit, Overload, Over/Under Temperature		
Low Battery Alarm ± 0.3 V (± 0.5 V for 24 V inverters)	12 V: 10.5 V 24 V: 21 V		
Low Battery Shutdown ± 0.3 V (± 0.5 V for 24 V inverters)	12 V: 10.5 V 24 V: 21 V		
Operating Temperature Range	-4° F - 104° F (-20° C - 40° C)		
Storage Temperature Range	-22° F - 158° F (-30° C - 70° C)		
Cooling	Temperature and Load Controller Cooling Fan		
AC Output Connections	Dual GFCI Outlet		
Remote Power Option	Yes		
Dimensions (L x W x H)	13.00" x 7.87" x 3.27" (330 mm x 200 mm x 83 mm)	14.65" x 7.87" x 3.27" (372 mm x 200 mm x 83 mm)	16.59" x 9.76" x 3.27" (421 mm x 248 mm x 83 mm)
MTBF	100,000 hours	92,000 hours	90,000 Hours
Weight	5.73 lbs (2.6 kg)	7.19 lbs (3.26 kg)	9.13 lbs (4.14 kg)
Warranty	2 Years		
Inverter Install Kits	GP-DC-KIT2		12 V: GP-DC-KIT3 24 V: GP-DC-KIT2
Remotes (Optional)	GP-ISW-R / GP-SWR-A		
Regulations and Safety	UL 458, FCC Part 15 Class B		

PROTECT YOURSELF AND YOUR EQUIPMENT.

FUSE AND CABLE KITS

Go Power! DC installation kits include everything you need to properly connect your Go Power! inverter to the batteries safely. The kit includes 10' large gauge battery cables, tie downs, lugs, and the appropriate inverter fuse (class T fuse) and mounting block.




12 VOLT	INVERTER SIZE
GP-DC-KIT 2	600-1000 W
GP-DC-KIT 3	1100-1800 W
GP-DC-KIT 4	2000-2500 W
GP-DC-KIT 5	2600-3000 W

REMOTELY TURN YOUR INVERTER ON/OFF AND SAVE BATTERY POWER.

INVERTER REMOTE


Remotely power appliances or electronics with the compact Go Power! inverter remote. The remote features an LED indicator showing inverter status, an ON/OFF switch and 25' of cable.



GP-SWR-A

Specifications may be subject to change. Product may not be exactly as shown. Specifications subject to local environmental conditions.

GP-ISW1500

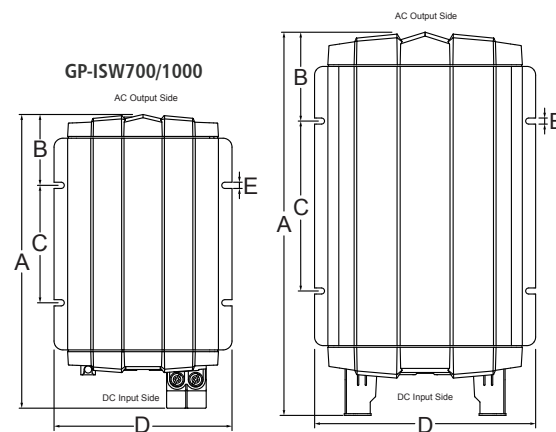

MODEL	A	B	C	D	E
GP-ISW700	13.00" (330 mm)	3.15" (80 mm)	5.20" (132 mm)	7.87" (200 mm)	0.28" (7 mm)
GP-ISW1000	14.65" (372 mm)	2.72" (69 mm)	7.72" (196 mm)	7.87" (200 mm)	0.28" (7 mm)
GP-ISW1500	16.57" (421 mm)	3.62" (92 mm)	7.72" (196 mm)	9.76" (248 mm)	0.28" (7 mm)

Note: both 12 V and 24 V inverter specifications are listed here.