


PART NUMBER	COLOR	V _F (V) TYP	I _F (mA) TYP	INTENSITY (fL) TYP	NOTE
557-1505-812F	RED	24	20	1000	SUPER BRIGHT
557-1605-809F	GREEN	24	16	1000	SUPER BRIGHT
557-1705-808F	YELLOW	24	20	1000	SUPER BRIGHT

* INTENSITY MEASURED IN FOOT LAMBERTS (1 fL = 3.4 cd/m²)

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	JLC	MES	RP	8-12-08
B		ADD NEW P/N'S 557-1605-809F & 557-1505-812F. UPDATE NOTE 3. DELETE SOLDERING SPEC FROM RoHS NOTE. IF FOR YELLOW WAS 16mA	JLC	KW	JP	12/24/08

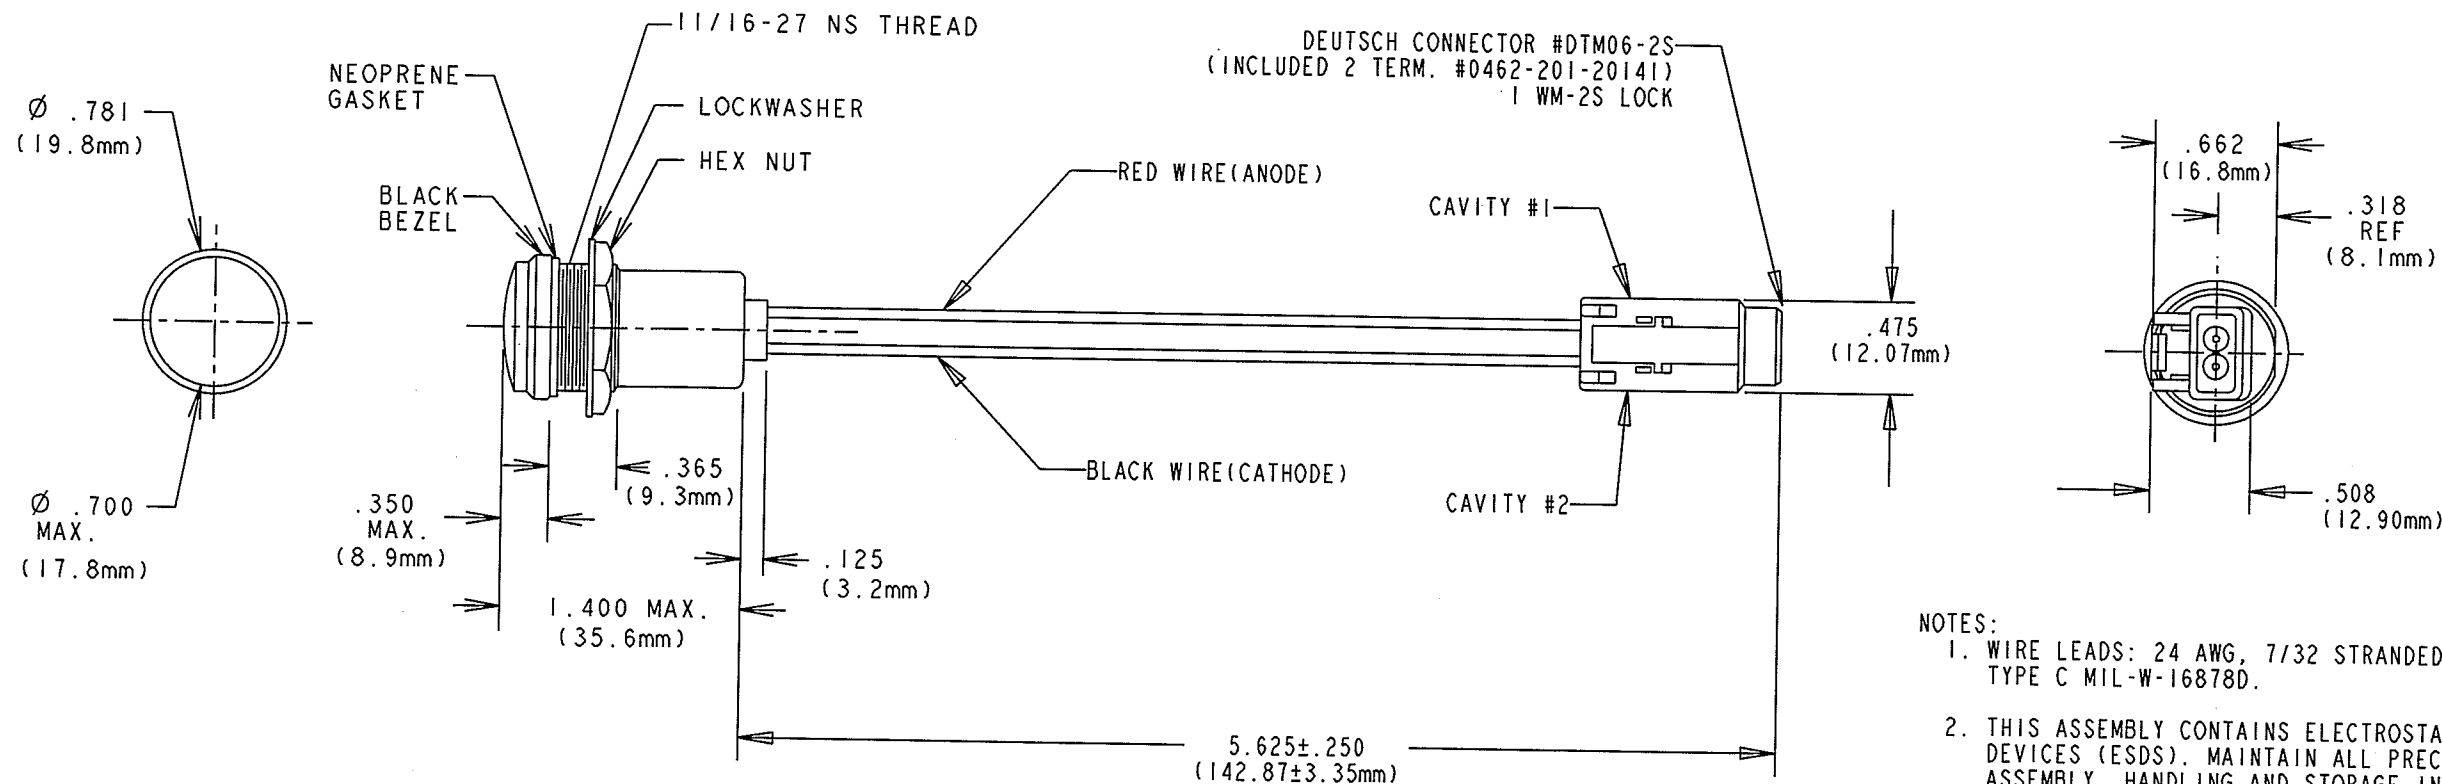


- NOTES:
1. WIRE LEADS: 24 AWG, 7/32 STRANDED PRE-BONDED, TYPE C MIL-W-16878D.
 2. THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING AND STORAGE IN ACCORDANCE WITH IPC-A-610.
 3. DIALIGHT PART NUMBER:
557-1505-812F RED
557-1605-809F GREEN
557-1705-808F YELLOW



ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES

MAX. PANEL THICKNESS: .200
SPACING ϕ TO ϕ : 1.000

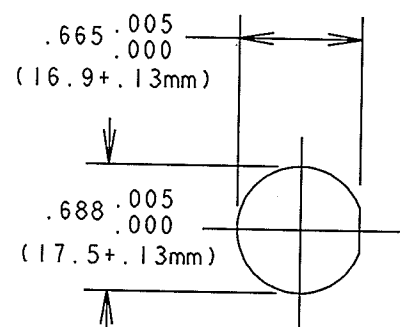

RECOMMENDED MOUNTING HOLE

RoHS Compliant 557-1X0X-8XXF
Part Numbers with the "F" suffix ending are RoHS Compliant.
Example: 557-1705-808F
Packaging is marked with "RoHS Compliant" label or equivalent markings.

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.			
SCALE: DRAWING SCALE ALL DIM'S IN: INCHES (MM)	DRAWING NUMBER C-17651	REV B	
TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS: $\pm 1/64$ DECIMALS (.XX): $\pm .01$ DECIMALS (.XXX): $\pm .005$ DECIMALS (.XXXX): $\pm .0005$ ANGLES: $\pm 1^\circ$	TITLE MULTI LED PMI 11/16" DIA.		
FINISH:	MATERIAL		
FSCM 83330	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727		
	SHEET 1 OF 1	FAMILY TABLE:	