


PART NUMBER	LED COLOR	OTIS SPECIFICATIONS	OPERATING TEMP. RANGE	LUM. INTENSITY
559-0001-811F	RED	AAA629AF1	-40°C TO +85°C	30 mcd @ 10mA
559-0001-812F	GREEN (WHITE DIFFUSED LENS)	AAA629AF2	-30°C TO +85°C	1 mcd @ 10mA

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	—	NEW RELEASE	KLJ	NO	MES	2-25-09
B	—	REMOVED NOTE 4 & 6 ADDED UPDATED SPECS TO TABLE.	VP	JTD	NO	11-11-15

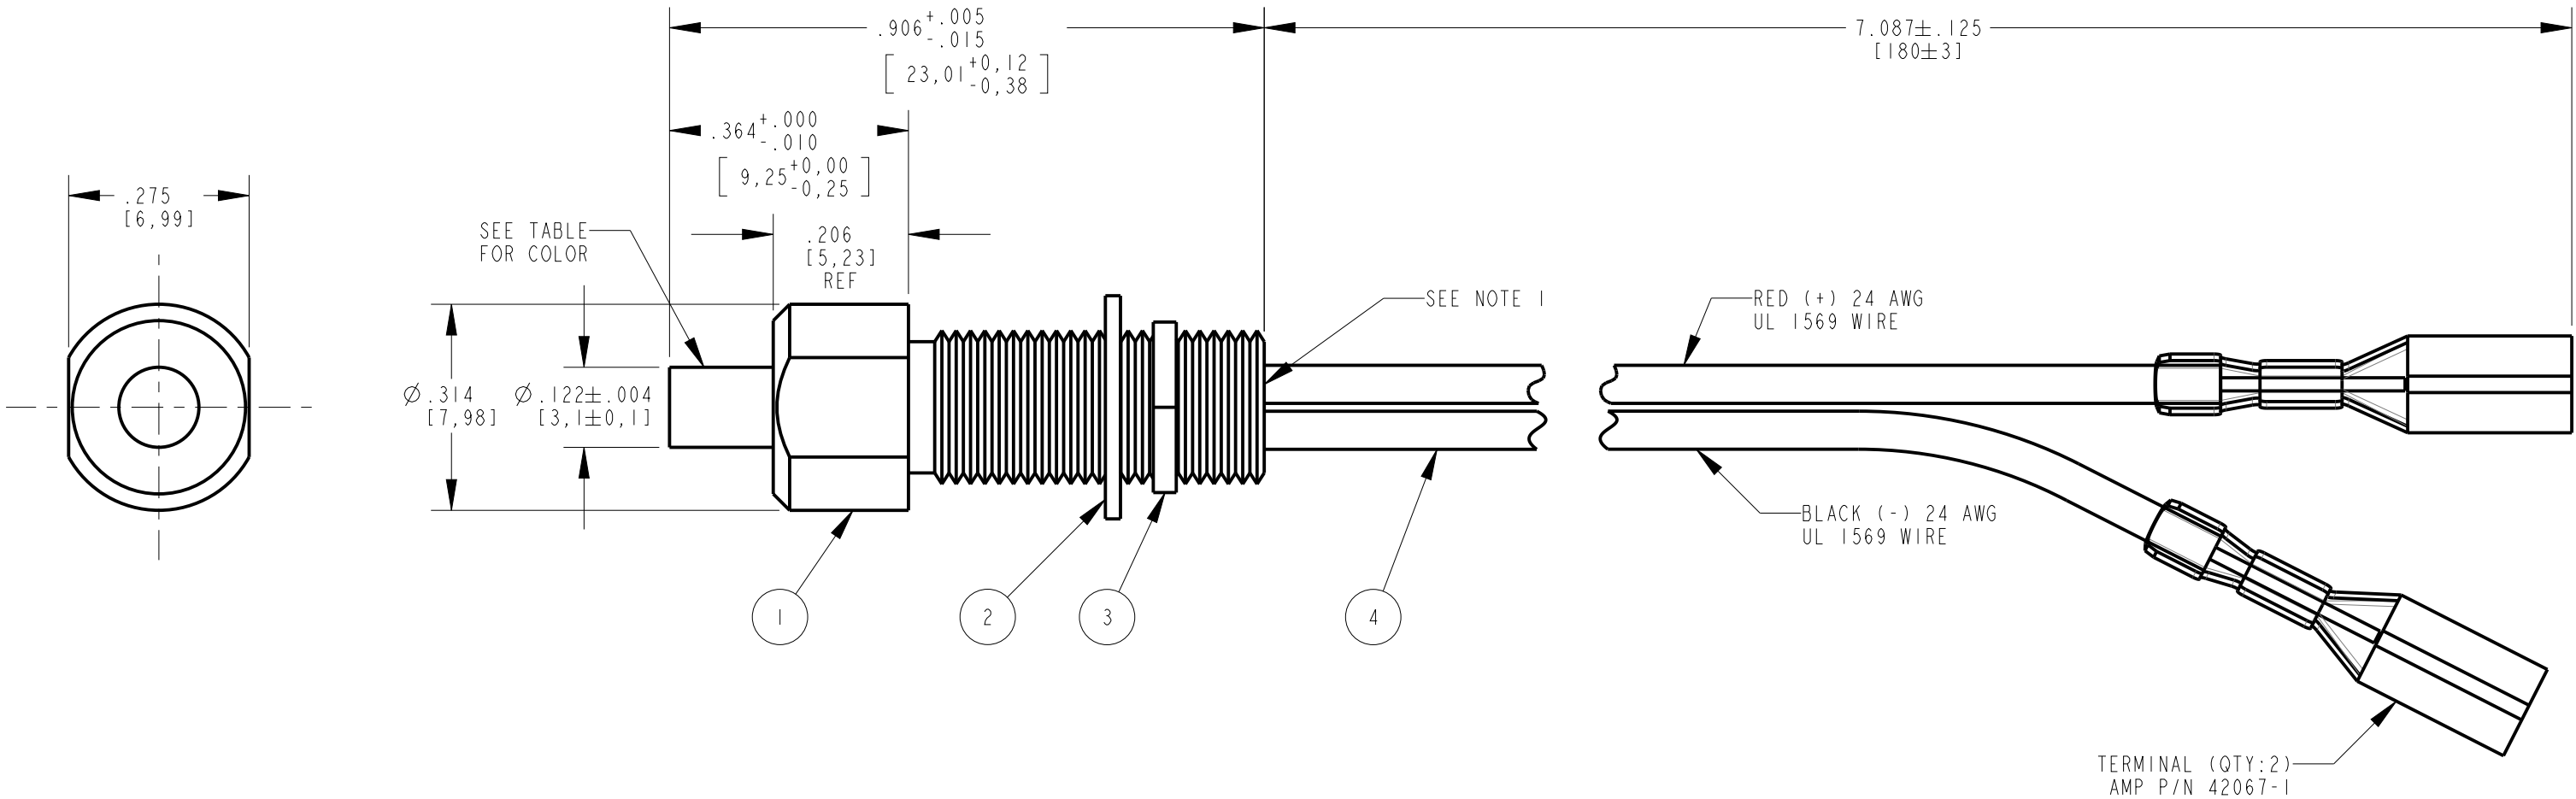

NOTES:

1. REAR OF UNIT POTTED WITH EMERSON & CUMING #45LV (BLACK) POTTING MATERIAL.
2. LED CHARACTERISTICS: RED = 630nm PEAK WAVELENGTH; GREEN = 560nm PEAK WAVELENGTH
3. ELECTRICAL CHARACTERISTICS: $I_F = 10 \text{ mA TYP @ } 30 \text{ VDC}$, $I_R = 100 \text{ } \mu\text{A MAX @ } 30 \text{ VDC}$
4. WIRE PULL STRENGTH = 5 LBS MAX

4	1	SUB-ASSY
3	1	HEX-NUT
2	1	LOCKWASHER
1	1	BUSHING
ITEM	QTY	DESCRIPTION

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: 4.000	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17710	B
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE LED SNAP-IN PANEL IND RoHS COMPLIANT	
FRACTIONS: ±1/64 DECIMALS (.XX): ±.01 DECIMALS (.XXX): ±.005		
ANGLES: ±1°	MATERIAL	
FINISH: -	Dialight oooooooooooooooo	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727