


DIALIGHT PART NUMBER	COLOR	VOLTAGE (V)	CURRENT (mA)
			MAX
557-0001-822F	YELLOW	8	60

RoHS COMPLIANT 557-0001-822F
Part Numbers with the "F" suffix ending are RoHS Compliant.
Packaging is marked with "RoHS Compliant" label or equivalent markings.

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	—	NEW RELEASE	AJF	KLJ	CJC	3-30-11
B	25372	ADDED NUT AND LOCK WASHER. REMOVED NOTE 6	VP	WFB	NO	5-6-15
C	97827	ADDED NOTE 6	JSG	SK		23SEP22

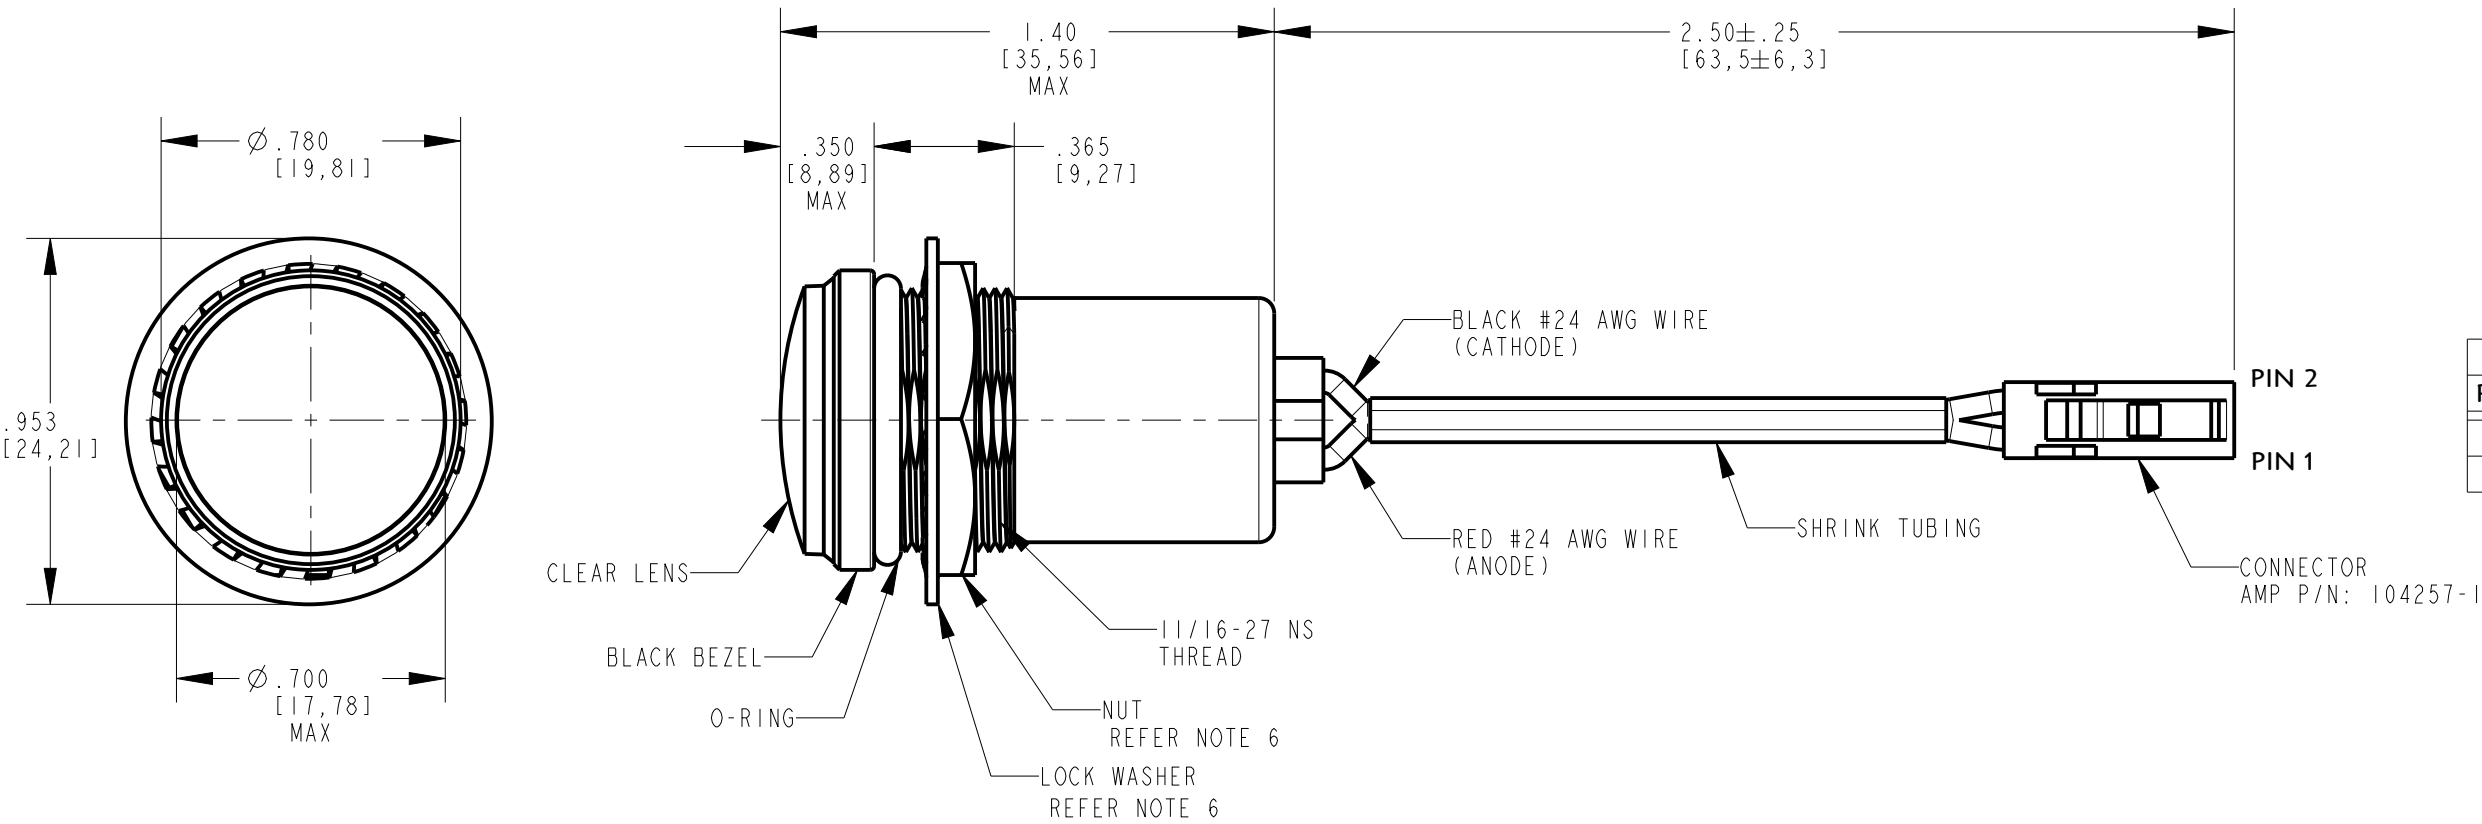

WIRING TABLE		
PIN #	WIRE COLOR	POLARITY
1	RED	ANODE
2	BLACK	CATHODE

NOTES:

- DIALIGHT PART NUMBER: 557-0001-822F.
- MAXIMUM PANEL THICKNESS: .156" [3,96mm].
- MAXIMUM MOUNTING TORQUE: 15 IN-LBS.
- OPERATING TEMPERATURE: -30 TO +80°C.
- STORAGE TEMPERATURE: -40 TO +85°C.
- HARDWARE IS NOT TO BE INSTALLED ON TO THE PART, BUT SUPPLIED SEPERATELY WITH THE PARTS

RECOMMENDED MOUNTING HOLE

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.		
SCALE: 2.000	DRAWING NUMBER	REV
ALL DIM'S: INCH (mm)	C-17911	C
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	
FRACTIONS: $\pm 1/64$	LED PMI, YELLOW, 8V	
DECIMALS (.XX): $\pm .02$	MATERIAL	
DECIMALS (.XXX): $\pm .015$	SEE BOM	
ANGLES: $\pm 1^\circ$	Dialight 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com	
FINISH		
FSCM 83330	SHEET 1 OF 1	FAMILY TABLE: