

FIGURE 1




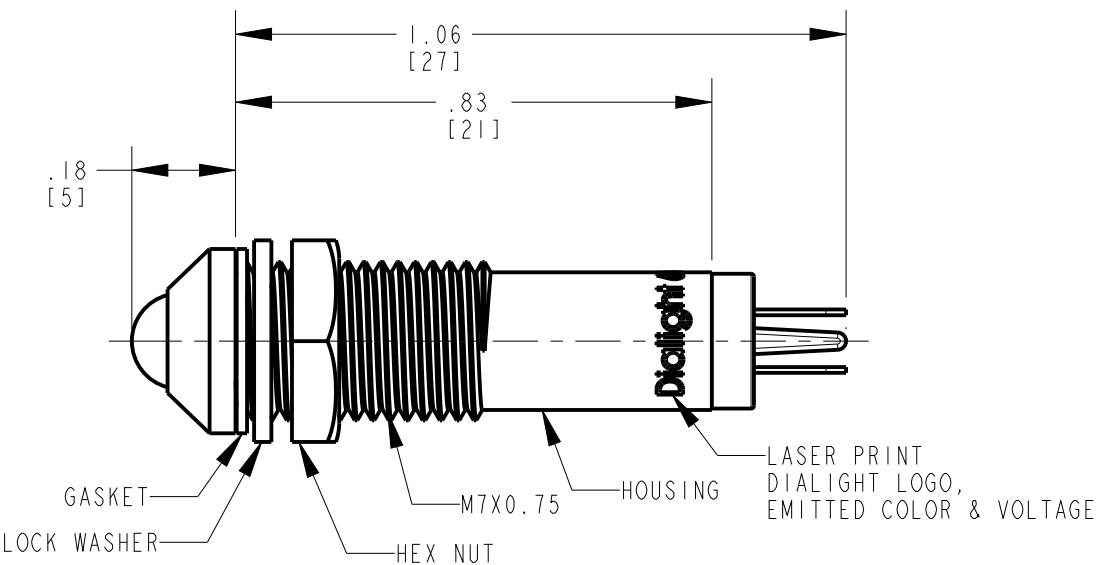


FIGURE 2

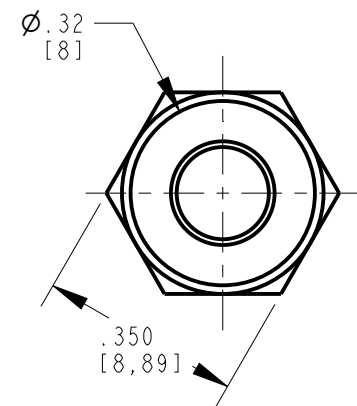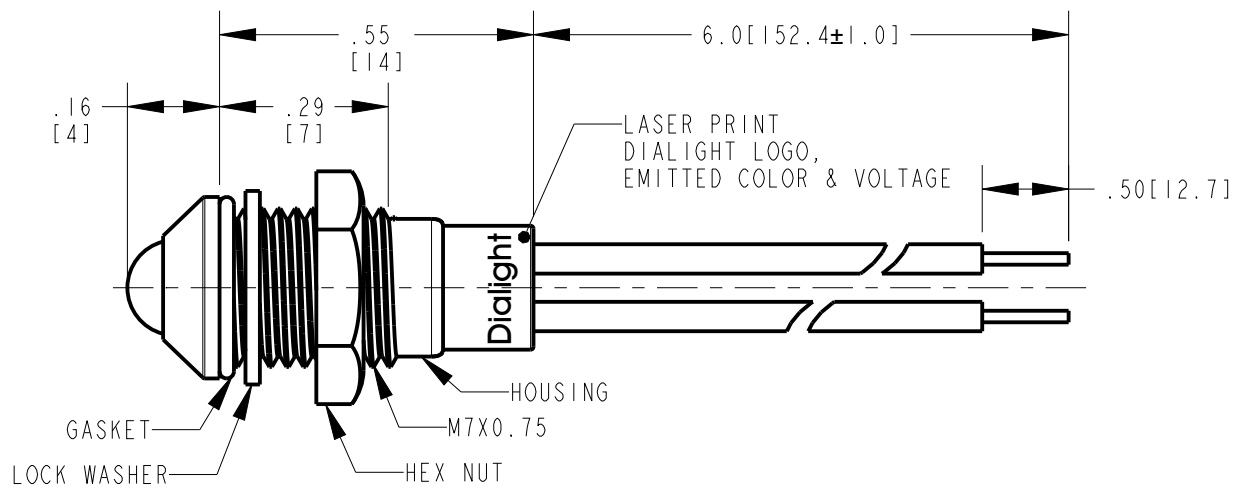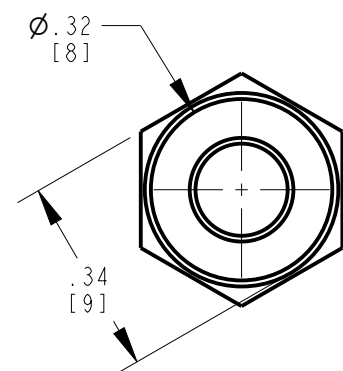

677 SERIES	ABSOLUTE MAXIMUM RATINGS (Ta=25°C)							(IF=20mA) ELECTRO-OPTICAL CHARACTERISTICS								
	FORWARD CURRENT IF(mA)	REVERSE VOLTAGE VR(V)	POWER DISSIPATION PD(mW)	ZENER REVERSE CURRENT IZ(mA)	OPERATING TEMP. Topr(°C)	STORAGE TEMP. Tstg(°C)	ELECTROSTATIC DISCHARGE ESD(V)	FORWARD VOLTAGE VF(V)		ZENER VOLTAGE VZ(V) @5mA	REVERSE CURRENT IR(uA)	LUMINOUS INTENSITY Iv(mcd)		WAVELENGTH (nm)		ANGLE (REF.)
								MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
RED	30	5	110	100	-40 to +85	-40 to +85	4K	1.8	2.4	5	5	800	1200	620	625	100
GREEN	30	5	110	100	-40 to +85	-40 to +85	—	3.0	3.4	5.2	5	1800	2800	515	520	120
ORANGE	30	5	70	100	-25 to +85	-25 to +85	—	1.8	2.3	5.2	10	600	1000	590	595	120
BLUE	30	5	110	100	-40 to +85	-40 to +85	4K	2.8	3.6	5.2	5	800	1200	460	475	120

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.

SCALE: 3.000
ALL DIM'S: INCH (mm)

TOLERANCES:
UNLESS OTHERWISE SPECIFIED
FRACTIONS: ±1/64
DECIMALS (.XX): ±.01
DECIMALS (.XXX): ±.005
DECIMALS (.XXXX): ±.0005
ANGLES: ±1°

FINISH
—

FSCM 83330

DRAWING NUMBER
C-18755

REV
A

TITLE
7mm HIGH BRIGHT LED PMI

MATERIAL
—

Dialight
1501 ROUTE 34 SOUTH
FARMINGDALE, NJ 07727
(732) 919-3119
www.dialight.com

SHEET 2 OF 2 FAMILY TABLE: