
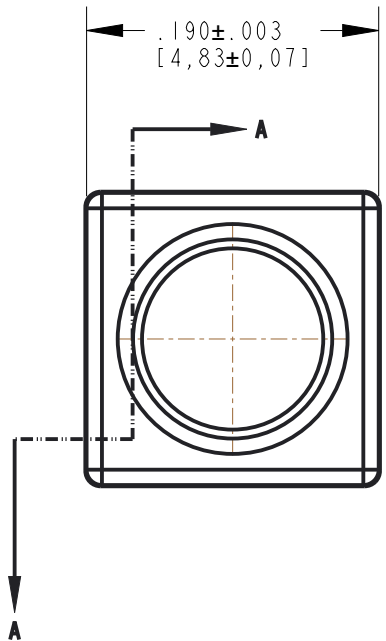
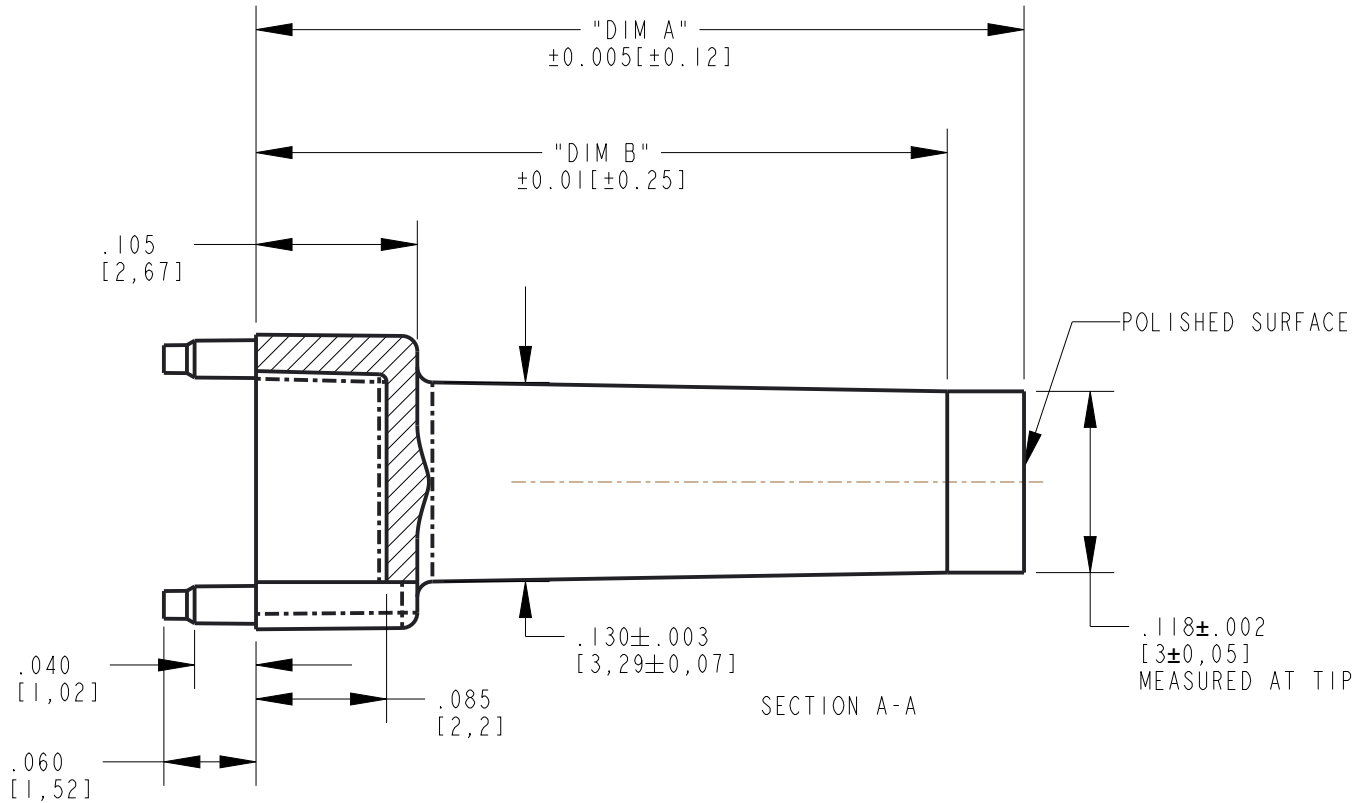


DIALIGHT PART NUMBER	DIM "A" in [mm]	DIM "B" in [mm]
515-1314-0200PF	.200[5.08]	.150[3.81]
515-1314-0250PF	.250[6.35]	.150[3.81]
515-1314-0300PF	.300[7.62]	.150[3.81]
515-1314-0350PF	.350[8.89]	.150[3.81]
515-1314-0400PF	.400[10.16]	.150[3.81]
515-1314-0450PF	.450[11.43]	.150[3.81]
515-1314-0500PF	.500[12.70]	.450[11.43]
515-1314-0550PF	.550[13.97]	.450[11.43]
515-1314-0600PF	.600[15.24]	.450[11.43]
515-1314-0650PF	.650[16.51]	.450[11.43]
515-1314-0700PF	.700[17.78]	.450[11.43]
515-1314-0800PF	.800[20.32]	.450[11.43]
515-1314-0900PF	.900[22.86]	.450[11.43]
515-1314-1000PF	1.000[25.40]	.450[11.43]

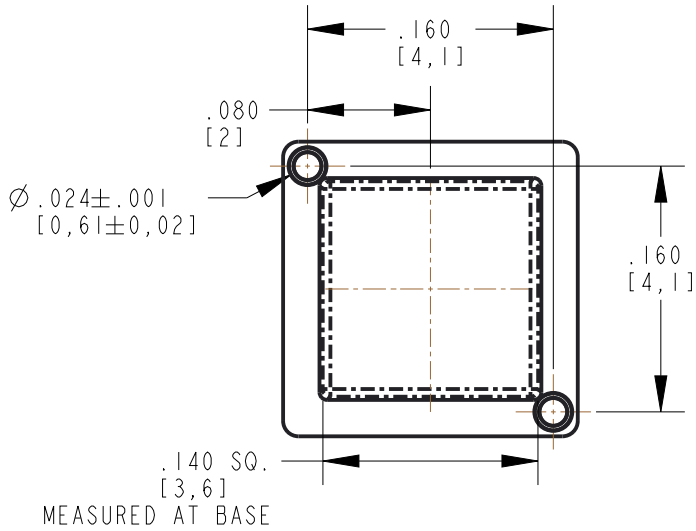

NOTES:

- COMPONENT MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE, UL 94V-0 GRADE.
- COMPONENT DESIGNED TO BE PRESSED INTO P.C. BOARD.
- RECOMMENDED LIGHT SOURCE:

SINGLE COLOR: 598-80X0-107F, 599-00X0-007F, 598-8EX0-107F W/ LENS,
597-3XXX-507F, 598-81XX-107F (0805 PKG),
597-5XXX-507F W/ REFLECTOR (0805 PKG), 598-82XX-107F (1206 PKG),
597-3XXX-507F W/ REFLECTOR (1208 PKG), 598-8CXX-107F MINI PLCC-2,

MULTI COLOR: 598-84X0-207CF, 598-87X0-207CF

REV	ECN NO	REVISIONS	DRN	CKD	APP	QA	CM	DATE
A	125618	NEW RELEASE	LD	CS	NO			9-22-25

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.			
DIALIGHT CORP INTERNAL REFERENCE ONLY = 3D MODEL : 5151314XXXXF-A.35			
SCALE: 10.000	DRAWING NUMBER		REV
ALL DIM's: INCH (mm)	C-18791		A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE		
FRACTIONS: ±1/64	3mm VERTICAL FLAT LP POLISHED		
DECIMALS (.XX): ±.01	MATERIAL		
DECIMALS (.XXX): ±.005	—		
DECIMALS (.XXXX): ±.0005	FINISH		
ANGLES: ±1°	—		
FSCM 83330	Dialight 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919-3119 www.dialight.com		
SHEET 1 OF 2	FAMILY TABLE:		

