



556 SERIES

Standard Panel Mount Indicators

MECHANICAL / SPECIFICATIONS

MOUNTING HOLE SIZE:
1.0" (25.4 mm)

MAX PANEL THICKNESS:
Flat: 0.600" (15.24 mm)
Dome: 0.187" (4.27 mm)

MOUNTING TORQUE: 40 in-lbs

VOLTAGE OPTIONS:
12 to 125VDC, and 125, 230VAC
(no resistor required)

OPERATING TEMP:
-30 °C to +85 °C (-22 °F to +185 °F)

STORAGE TEMP:
-40 °C to +100 °C (-40 °F to +212 °F)

ELECTRICAL CONNECTION:
6-32 screw terminals

HOUSING: Brass – White or Black Nickel Plated

TERMINALS: Brass – Hot solder dip
per Mil-F-14072D, M258, Type II

LENS MATERIAL:
Transparent Polycarbonate (UL 94V-0)

LOCK WASHER: Phosphor Bronze –
White or Black Nickel Plated

NUT: Brass – White or Black Nickel Plated

CERTIFICATIONS & RATINGS


UL 508
IP66
NEMA 4X
RoHS Compliant w/6C exemption
IK07

APPLICATION


The 556 Series LED Panel Mount Indicators incorporate both InGaN and AlInGaP technologies to offer maximum light output. This is a highly durable package, designed to withstand outdoor applications susceptible to rain, dust and sunlight:

- Instrument panels
- Safety applications
- Transportation: rail, bus, airline
- Vending, gaming
- Lane control
- Display lighting


DIMENSIONS inches [mm]

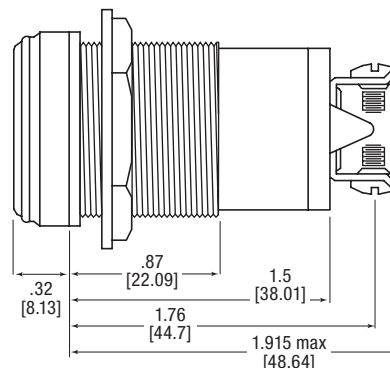

FLAT

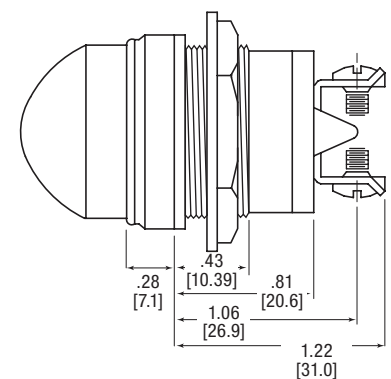

DOMED



ORDERING INFORMATION

FLAT LENS

White Nickel	Black Nickel	Color	Voltage (VDC)	Typ Current (mA)	Typical Intensity (mcd)
556-1003-304F	556-1003-204F	○ White	12	60	61,000
556-1503-304F	556-1503-204F	● Red		95	22,000
556-1603-304F	556-1603-204F	● Green		60	41,500
556-1683-304F	556-1683-204F	● Cyan		60	37,000
556-1703-304F	556-1703-204F	● Yellow		95	13,500
556-1803-304F	556-1803-204F	● Blue		60	13,000
556-1903-304F	556-1903-204F	● Orange		95	11,500
556-1004-304F	556-1004-204F	○ White	24	32	61,000
556-1504-304F	556-1504-204F	● Red		46	22,000
556-1604-304F	556-1604-204F	● Green		32	41,500
556-1684-304F	556-1684-204F	● Cyan		32	37,000
556-1704-304F	556-1704-204F	● Yellow		46	13,500
556-1804-304F	556-1804-204F	● Blue		32	13,000
556-1904-304F	556-1904-204F	● Orange		46	11,500
556-1508-304F	556-1508-204F	● Red	37.5	20	14,000
556-1608-304F	556-1608-204F	● Green		16	54,000
556-1708-304F	556-1708-204F	● Yellow		20	12,750
556-1506-304F	556-1506-204F	● Red	72	18.5	15,000
556-1606-304F	556-1606-204F	● Green		16	45,500
556-1706-304F	556-1706-204F	● Yellow		20	9,000
556-1806-304F	556-1806-204F	● Blue		18.5	15,000
556-1007-304F		○ White	125	10.5	36,000
556-1507-304F		● Red		10	8,000
556-1607-304F		● Green			27,000
556-1707-304F		● Yellow			5,750
556-1005-304F		○ White	125	11	35,000
556-1505-304F		● Red		10.5	8,000
556-1605-304F		● Green		9.5	29,000
556-1685-304F		● Cyan		9.5	24,750
556-1705-304F		● Yellow		10.5	5,750
556-1805-304F		● Blue		9.5	7,750
556-1905-304F		● Orange		10.5	6,000
556-1009-304F		○ White	230	6	35,000
556-1509-304F		● Red		7	8,000
556-1609-304F		● Green			29,000
556-1709-304F		● Yellow			5,750
556-1809-304F		● Blue			7,750
556-1909-304F		● Orange			6,000

FLAT LENS, DIFFUSED

White Nickel	Black Nickel	Color	Voltage	Typ Current (mA)	Typical Intensity (mcd)
556-1813-304F		● Blue	12	60	13,000

ORDERING INFORMATION

DOMED LENS

White Nickel	Black Nickel	Color	Voltage (VDC)	Typ Current (mA)	Typical Intensity (mcd)
556-3003-304F	556-3003-204F	○ White	12	60	17,000
556-3503-304F	556-3503-204F	● Red		95	14,000
556-3603-304F	556-3603-204F	● Green		60	14,000
556-3683-304F	556-3683-204F	● Cyan		60	11,500
556-3703-304F	556-3703-204F	● Yellow		95	4,000
556-3803-304F	556-3803-204F	● Blue		60	12,000
556-3903-304F	556-3903-204F	● Orange		95	3,500
556-3004-304F	556-3004-204F	○ White	24	32	17,000
556-3504-304F	556-3504-204F	● Red		46	14,000
556-3604-304F	556-3604-204F	● Green		32	14,000
556-3684-304F	556-3684-204F	● Cyan		32	11,500
556-3704-304F	556-3704-204F	● Yellow		46	4,000
556-3804-304F	556-3804-204F	● Blue		32	12,000
556-3904-304F	556-3904-204F	● Orange		46	3,500
556-3508-304F	556-3508-204F	● Red	37.5	20	4,750
556-3608-304F	556-3608-204F	● Green		16	15,750
556-3708-304F	556-3708-204F	● Yellow		20	3,250
556-3506-304F	556-3506-204F	● Red	72	18.5	4,200
556-3606-304F	556-3606-204F	● Green		16	14,250
556-3706-304F	556-3706-204F	● Yellow		20	2,600
556-3806-304F	556-3806-204F	● Blue		18.5	4,500
556-3007-304F		○ White	125	10.5	10,250
556-3507-304F		● Red		10	2,500
556-3607-304F		● Green			8,250
556-3707-304F		● Yellow			1,500
556-3005-304F		○ White	125	11	10,250
556-3505-304F		● Red		10.5	2,500
556-3605-304F		● Green		9.5	9,500
556-3685-304F		● Cyan		9.5	6,500
556-3705-304F		● Yellow		10.5	1,750
556-3805-304F		● Blue		9.5	3,000
556-3905-304F		● Orange		10.5	1,750
556-3009-304F		○ White	230	6	10,250
556-3509-304F		● Red		7	2,500
556-3609-304F		● Green			9,500
556-3709-304F		● Yellow			1,750
556-3809-304F		● Blue			3,000
556-3909-304F		● Orange			1,750



Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for at: www.dialight.com/resources/warranties/, Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.