



620 SERIES

8mm Heavy Duty Panel Mount Indicators

MECHANICAL / SPECIFICATIONS

MOUNTING HOLE SIZE: 0.323" (8.2 mm)

MAX PANEL THICKNESS:

0.394" (10 mm)

MOUNTING TORQUE: 8 lbs-in (1Nm)

OPERATING VOLTAGE: 3 V DC

6.12 & 24 VDC

(internal resistor included)

OPERATING TEMP:

-25 °C to +70 °C (-13 °F to 158 °F)

STORAGE TEMP:

-25 °C to +70 °C (-13 °F to 158 °F)

ELECTRICAL CONNECTION:

Solder terminals

HOUSING: Stainless Steel

TERMINALS: Stainless Steel

NUT: Stainless Steel

CERTIFICATIONS & RATINGS

RoHS compliant IP66/IP67 IK10 **NEMA 4X**


APPLICATION

The 620 Series Heavy Duty LED Panel Mount Indicators are elegantly designed for a high-end aesthetic paired with sturdy construction. These indicators are non-magnetic, corrosion resistant for both indoor and outdoor use, and secured to prevent dirt, dust, and water penetration. Ideal for a variety of applications such as:

- Instrumentation
- Navigation
- Industrial panels
- Communications
- Warning lights

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication

DIMENSIONS inches [mm]

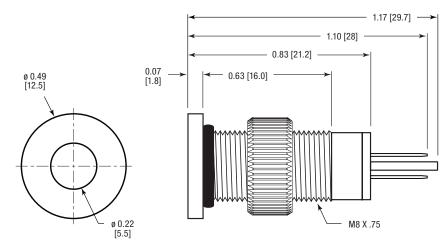

These indicators are un-polarized.

ORDERING INFORMATION

Part Number	Color	Voltage (V DC)	Current (mA)	Typical Intensity (mcd)
<u>620-1101-304F</u>	Red	3	15	200
620-1201-304F	Green			250
<u>620-1301-304F</u>	Yellow			350
620-1401-304F	Blue			300
620-1102-304F	Red	6		200
620-1202-304F	Green			250
620-1302-304F	Yellow			350
620-1402-304F	Blue			300
620-1103-304F	Red	12		200
620-1203-304F	Green			250
620-1303-304F	Yellow			350
620-1403-304F	Blue			300
620-1104-304F	Red	24		200
620-1204-304F	Green			250
620-1304-304F	Yellow			350
620-1404-304F	Blue			300



Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for at: www.dialight.com/resources/warranties/, Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.