

654 SERIES Snap-In Panel Mount Indicators

MECHANICAL / SPECIFICATIONS

MOUNTING HOLE SIZE:

0.657" (16.7 mm)

MAX PANEL THICKNESS:

0.138" (3.5 mm)

VOLTAGE OPTIONS:

12 & 24 VDC (no resistor required)

OPERATING TEMP:

-20 °C to +80 °C (-4 °F to +176 °F)

STORAGE TEMP:

-20 °C to +80 °C (-4 °F to +176 °F)

ELECTRICAL CONNECTION:

5" wire leads

HOUSING:

Polycarbonate

WIRE LEADS:

22 AWG

CERTIFICATIONS & RATINGS


RoHS compliant

APPLICATION

The 654 Series LED Panel Mount Indicators are designed with the unique feature of flexible tabs that allow for mounting to panels of thicknesses ranging from 0.027" (0.7 mm) to 0.138" (3.5 mm). They are ideal for a variety of applications, such as:

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

DIMENSIONS inches [mm]

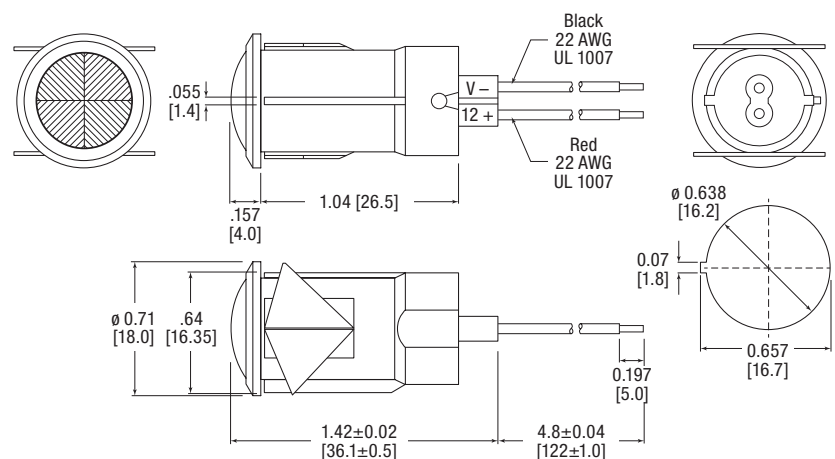

ORDERING INFORMATION

Dialight P/N	Color	Voltage (VDC)	Current (mA)	Typical Intensity (mcd)
654-1103-103F	● Red	12	20	845
654-1203-103F	● Green			600
654-1303-103F	● Yellow			465
654-1403-103F	● Blue			390
654-1104-103F	● Red	24		845
654-1204-103F	● Green			600
654-1304-103F	● Yellow			465
654-1404-103F	● Blue			390



Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for at: www.dialight.com/resources/warranties/, Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.