



ADJUSTABLE ROOF BRACKET

Part #: 2500, 3500

Instructions

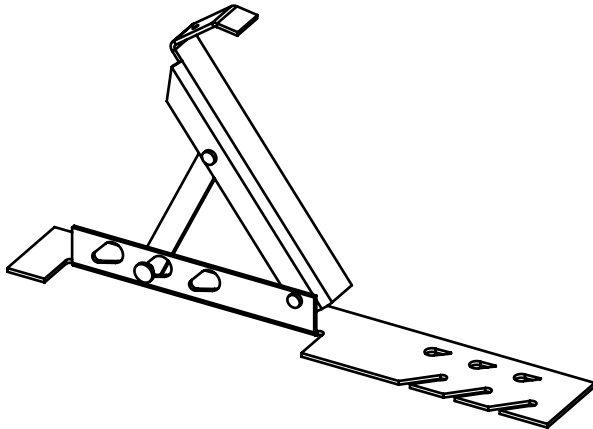

Part # 2500

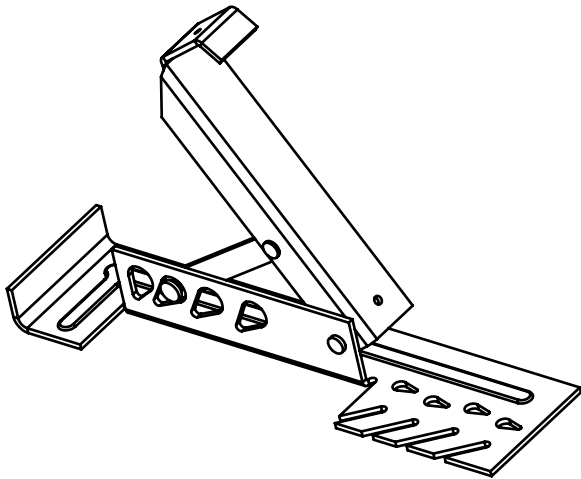

Part # 3500

⚠ WARNING! DO NOT USE THIS PRODUCT AS FALL PROTECTION.

⚠ WARNING ALWAYS WEAR APPROPRIATE PROTECTIVE EQUIPMENT.

⚠ WARNING! FAILURE TO READ AND FOLLOW INSTRUCTIONS ON THE USE OF THIS PRODUCT COULD RESULT IN SERIOUS INJURY OR DEATH.

✗ Do not throw instructions away.

⚠ Read and understand instructions before using this equipment.

Care and Maintenance

⚠ NOTE Inspect all Roofing Brackets before each use to be sure that there is no damage or deformation, or deterioration from rusting and immediately remove from service if defects or damage is found.

⚠ NOTE Do not throw or drop from a building or onto a truck.

⚠ NOTE Do not use if exposed to extreme heat or cold. Discard at once.

⚠ NOTE Do not use if wet or frozen.

Instructions for Use

⚠ NOTE Maximum user weight (including all clothing, tools, and equipment) is 460 lb (208 kg) per 8 ft of scaffolding.

⚠ NOTE The platform support arm must be set to match the pitch of the roof, allowing for the installation of a fully decked and level walk surface.

⚠ NOTE Always use OSHA compliant fall arrest system, guardrails, catch platforms or other safety equipment as required by Local, State or Federal OSHA Regulations.

⚠ NOTE Roof Brackets are intended for use by the experienced tradesman.

⚠ NOTE OSHA Regulations require that employers provide training in the use and care of this product.

Part #	Description
2500	10 in Adjustable Roof Bracket
3500	10 in Adjustable Pro-Line Roof Bracket



Mounting the Roof Bracket

■ Step 1

Attach bracket to the roof using 20-penny nails. Use all teardrop holes on left or all slots on right side of mounting plate.

■ Step 2

Position bracket so that all nails penetrate both the roof's surface and the rafter below.

■ Step 3

Spacing between brackets should be less than 8 ft.

Installing Platform

■ Step 1

Wood platforms need to be at least 2 in thick and extend beyond the support arm at least 6 in and not more than 12 in.

■ Step 2

Always use clear, straight-grained wood free from knots or defects.

■ Step 3

If extended length platforms are required, use additional Roof Brackets every 8 ft.

■ Step 4

Secure to bracket by nailing the platform to the bracket in the hole on the platform retainer.

USA

607 East Sam Houston Parkway South
Suite 800
Pasadena, TX 77503
800 466 6385
customer.service@guardianfall.com

CANADA

580 Notre Dame Avenue, Unit 16
Sudbury, ON
P3C 5L2
800 466 6385
customer.service@guardianfall.com

WARRANTY: Guardian warrants to Buyer that all products are free from defects in material, workmanship, and design (if a Supplier-responsible design), however this warranty does not cover conditions resulting from normal wear and tear, neglect, abuse, accident or otherwise. Guardian's obligations under this warranty apply for the lifetime of the products and are limited to the replacement of product only. This warranty is not transferable to any other Guardian service and does not apply to product that is resold after having been put into service. No other person, firm, entity, or the like is authorized to assume or assign for Guardian any other liability in connection with the sale or use of Guardian's products. Furthermore, this warranty is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. There are no implied warranties of merchantability or fitness for a particular purpose, which are specifically disclaimed.
