



### **MCP4Y10-N001-OPC**

Mellanox® MCP4Y10-N001 Compatible TAA 800GBase-CU OSFP to OSFP Direct Attach Cable (Passive Twinax, 1m)

#### **Features**

- OSFP-RHS Module Compliant to OSFP MSA
- Transmission Data Rate Up to PAM4 106.25Gbps Per Channel
- Enables 800Gbps Transmission
- Built-In EEPROM Functions
- Operating Temperature Range: 0 to 70 Celsius
- RoHS Compliant and Lead-Free



#### **Applications:**

- 800GBase Ethernet

#### **Product Description**

This is a Mellanox® compatible 800GBase-CU OSFP to OSFP direct attach cable that operates over passive copper with a maximum reach of 1.0m (3.3ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

## General Specifications

| Parameter                   | Symbol | Min. | Typ. | Max. | Unit |
|-----------------------------|--------|------|------|------|------|
| Storage Temperature         | Tstg   | -40  |      | 85   | °C   |
| Operating Case Temperature  | Tc     | 0    |      | 70   | °C   |
| Supply Voltage              | Vcc    | 3.13 | 3.3  | 3.47 | V    |
| Relative Operating Humidity | RH     | 5    |      | 85   | %    |
| Data Rate                   | DR     |      | 800  |      | Gbps |

## Physical Characteristics

| Parameter       | Symbol | Min.                                             | Typ. | Max. | Unit | Notes |
|-----------------|--------|--------------------------------------------------|------|------|------|-------|
| Length          | L      |                                                  |      | 1    | M    |       |
| AWG             |        |                                                  | 28   |      | AWG  |       |
| Jacket Material |        | Plastic Braided Mesh Technology Net, Silver Gray |      |      |      |       |

## Electrical Specifications

| Parameter                                   | Symbol      | Min.                                                                                                                         | Typ. | Max. | Unit | Notes |
|---------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------|------|------|------|-------|
| Resistance                                  | Rcon        |                                                                                                                              |      | 3    | Ω    |       |
| Insulation Resistance                       | Rins        |                                                                                                                              |      | 10   | MΩ   |       |
| Raw Cable Impedance                         | Zca         | 95                                                                                                                           |      | 110  | Ω    |       |
| Mated Connector Impedance                   | Zmated      | 85                                                                                                                           |      | 115  | Ω    |       |
| Maximum Insertion Loss @26.56GHz            | SDD21       | 11                                                                                                                           |      | 18   | dB   |       |
| Differential to Common-Mode Return Loss     | SDD11/22    | $RL_{cd}(f) \geq \begin{cases} 22 - 10(f/26.56) & 0.05 \leq f < 26.56 \\ 15 - 3(f/26.56) & 26.56 \leq f \leq 40 \end{cases}$ |      |      | dB   | 1     |
| Differential to Common-Mode Conversion Loss | SCD11/22    | $Conversion\_loss(f) - \begin{cases} 10 & 0.05 \leq f < 12.89 \\ 14 - 0.3108f & 12.89 \leq f \leq 40 \end{cases}$            |      |      | dB   | 1     |
| Common-Mode to Common-Mode Return Loss      | SCD21-SDD21 | $RL_{cc}(f) \geq 1.08$                                                                                                       |      |      | dB   | 1     |
| Minimum COM                                 | COM         | 3                                                                                                                            |      |      | dB   |       |

### Notes:

1. For  $0.05 \leq f \leq 40$ GHz, where “f” is the frequency in GHz.

## Pin Descriptions


| Pin | Symbol    | Name/Description               | Logic       | Plug Sequence | Direction        | Notes |
|-----|-----------|--------------------------------|-------------|---------------|------------------|-------|
| 1   | GND       | Module Ground.                 |             | 1             |                  |       |
| 2   | Tx2+      | Transmitter Data Non-Inverted. | CML-I       | 3             | Input from Host  |       |
| 3   | Tx2-      | Transmitter Data Inverted.     | CML-I       | 3             | Input from Host  |       |
| 4   | GND       | Module Ground.                 |             | 1             |                  |       |
| 5   | Tx4+      | Transmitter Data Non-Inverted. | CML-I       | 3             | Input from Host  |       |
| 6   | Tx4-      | Transmitter Data Inverted.     | CML-I       | 3             | Input from Host  |       |
| 7   | GND       | Module Ground.                 |             | 1             |                  |       |
| 8   | Tx6+      | Transmitter Data Non-Inverted. | CML-I       | 3             | Input from Host  |       |
| 9   | Tx6-      | Transmitter Data Inverted.     | CML-I       | 3             | Input from Host  |       |
| 10  | GND       | Module Ground.                 |             | 1             |                  |       |
| 11  | Tx8+      | Transmitter Data Non-Inverted. | CML-I       | 3             | Input from Host  |       |
| 12  | Tx8-      | Transmitter Data Inverted.     | CML-I       | 3             | Input from Host  |       |
| 13  | GND       | Module Ground.                 |             | 1             |                  |       |
| 14  | SCL       | 2-Wire Serial Interface Clock. | LVC MOS-I/O | 3             | Bi-Directional   | 1     |
| 15  | Vcc       | +3.3V Power.                   |             | 2             | Power from Host  |       |
| 16  | Vcc       | +3.3V Power.                   |             | 2             | Power from Host  |       |
| 17  | LPWn/PRSn | Low-Power Mode/Module Present. | Multi-Level | 3             | Bi-Directional   | 2     |
| 18  | GND       | Module Ground.                 |             | 1             |                  |       |
| 19  | Rx7-      | Receiver Data Inverted.        | CML-O       | 3             | Output from Host |       |
| 20  | Rx7+      | Receiver Data Non-Inverted.    | CML-O       | 3             | Output from Host |       |
| 21  | GND       | Module Ground.                 |             | 1             |                  |       |
| 22  | Rx5-      | Receiver Data Inverted.        | CML-O       | 3             | Output from Host |       |
| 23  | Rx5+      | Receiver Data Non-Inverted.    | CML-O       | 3             | Output from Host |       |
| 24  | GND       | Module Ground.                 |             | 1             |                  |       |
| 25  | Rx3-      | Receiver Data Inverted.        | CML-O       | 3             | Output from Host |       |
| 26  | Rx3+      | Receiver Data Non-Inverted.    | CML-O       | 3             | Output from Host |       |
| 27  | GND       | Module Ground.                 |             | 1             |                  |       |
| 28  | Rx1-      | Receiver Data Inverted.        | CML-O       | 3             | Output from Host |       |
| 29  | Rx1+      | Receiver Data Non-Inverted.    | CML-O       | 3             | Output from Host |       |
| 30  | GND       | Module Ground.                 |             | 1             |                  |       |
| 31  | GND       | Module Ground.                 |             | 1             |                  |       |
| 32  | Rx2+      | Receiver Data Non-Inverted.    | CML-O       | 3             | Output from Host |       |
| 33  | Rx2-      | Receiver Data Inverted.        | CML-O       | 3             | Output from Host |       |
| 34  | GND       | Module Ground.                 |             | 1             |                  |       |
| 35  | Rx4+      | Receiver Data Non-Inverted.    | CML-O       | 3             | Output from Host |       |
| 36  | Rx4-      | Receiver Data Inverted.        | CML-O       | 3             | Output from Host |       |
| 37  | GND       | Module Ground.                 |             | 1             |                  |       |
| 38  | Rx6+      | Receiver Data Non-Inverted.    | CML-O       | 3             | Output from Host |       |
| 39  | Rx6-      | Receiver Data Inverted.        | CML-O       | 3             | Output from Host |       |
| 40  | GND       | Module Ground.                 |             | 1             |                  |       |

|    |          |                                |             |   |                  |   |
|----|----------|--------------------------------|-------------|---|------------------|---|
| 41 | Rx8+     | Receiver Data Non-Inverted.    | CML-O       | 3 | Output from Host |   |
| 42 | Rx8-     | Receiver Data Inverted.        | CML-O       | 3 | Output from Host |   |
| 43 | GND      | Module Ground.                 |             | 1 |                  |   |
| 44 | INT/RSTn | Module Interrupt/Module Reset. | Multi-Level | 3 | Bi-Directional   | 2 |
| 45 | Vcc      | +3.3V Power.                   |             | 2 | Power from Host  |   |
| 46 | Vcc      | +3.3V Power.                   |             | 2 | Power from Host  |   |
| 47 | SDA      | 2-Wire Serial Interface Data.  | LVC MOS-I/O | 3 | Bi-Directional   | 1 |
| 48 | GND      | Module Ground.                 |             | 1 |                  |   |
| 49 | Tx7-     | Transmitter Data Inverted.     | CML-I       | 3 | Input from Host  |   |
| 50 | Tx7+     | Transmitter Data Non-Inverted. | CML-I       | 3 | Input from Host  |   |
| 51 | GND      | Module Ground.                 |             | 1 |                  |   |
| 52 | Tx5-     | Transmitter Data Inverted.     | CML-I       | 3 | Input from Host  |   |
| 53 | Tx5+     | Transmitter Data Non-Inverted. | CML-I       | 3 | Input from Host  |   |
| 54 | GND      | Module Ground.                 |             | 1 |                  |   |
| 55 | Tx3-     | Transmitter Data Inverted.     | CML-I       | 3 | Input from Host  |   |
| 56 | Tx3+     | Transmitter Data Non-Inverted. | CML-I       | 3 | Input from Host  |   |
| 57 | GND      | Module Ground.                 |             | 1 |                  |   |
| 58 | Tx1-     | Transmitter Data Inverted.     | CML-I       | 3 | Input from Host  |   |
| 59 | Tx1+     | Transmitter Data Non-Inverted. | CML-I       | 3 | Input from Host  |   |
| 60 | GND      | Module Ground.                 |             | 1 |                  |   |


#### Notes:

1. Open-drain with pull-up resistor on the host.
2. See “Pin Assignments” below for the required circuit.

#### Pin Assignments

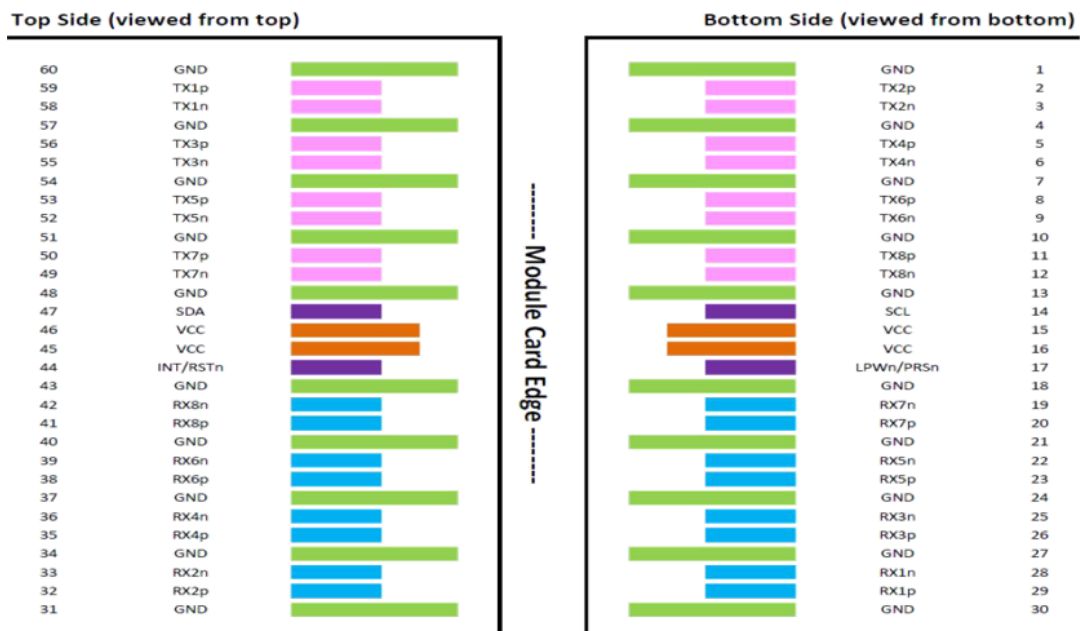

Mechanical Specifications

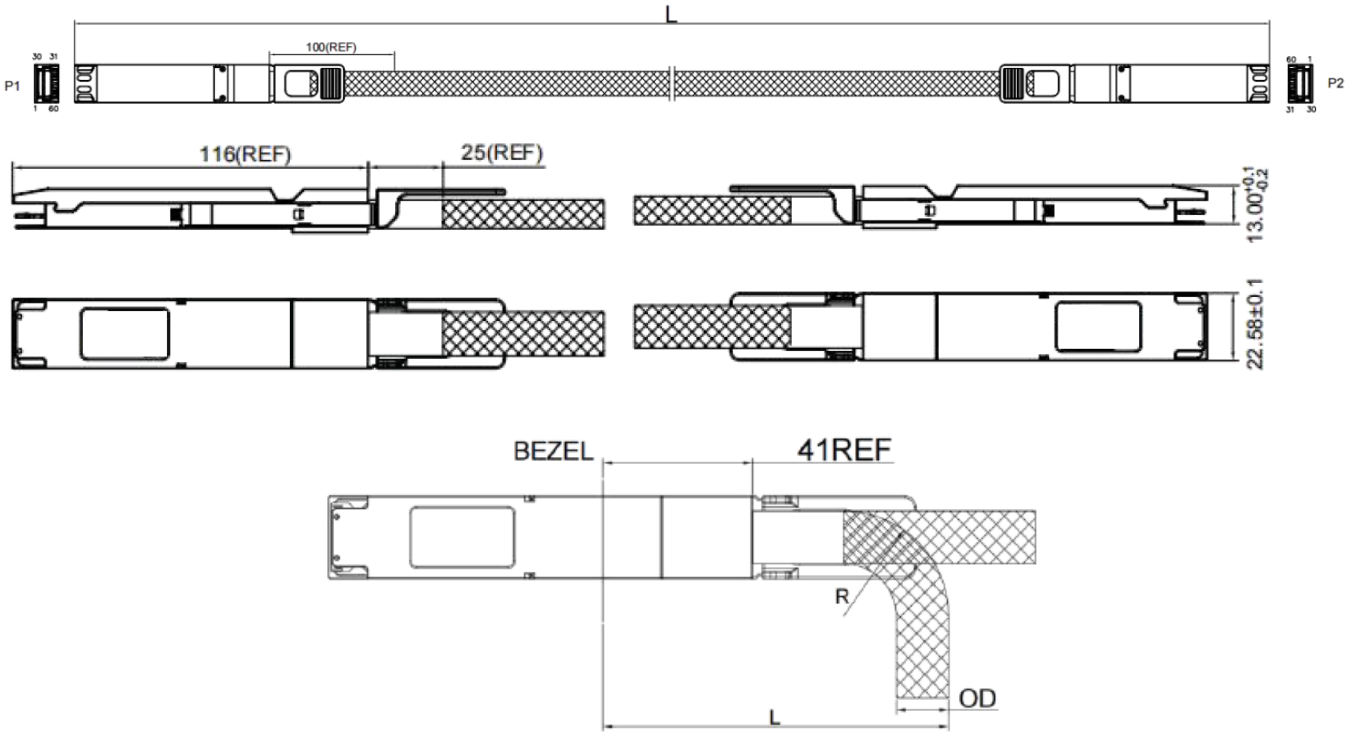

Bending Radius

| Wire Gauge | OD (Ref.) | Bend Radius "R" | Min. Bend Radius "L" |
|------------|-----------|-----------------|----------------------|
| 28AWG      | 10.2mm    | 21mm            | 81mm                 |

## **OptioConnect**

### **Innovation for the Future of High-Speed Networking**

#### **Who We Are**

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

#### **What We Do**

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

#### **Smarter Networks by Design**

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

#### **Our Team**

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

#### **Our Mission**

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

#### **Let's Connect**

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

[www.optioconnect.com](http://www.optioconnect.com) | [info@optioconnect.com](mailto:info@optioconnect.com)

