



VELOCITY

Full Body Harness

The Velocity Full Body Harness is the perfect solution for Industrial, General Industry and MRO applications. Its streamlined and simplified design provide an ultra-lightweight full body harness that doesn't compromise on performance or features.

**HEIGHT SAFETY.
SIMPLIFIED.**

guardianfall.com



VELOCITY

Full Body Harness



01703

Key features & benefits

Water-repellent webbing

Provides added durability and longevity in tough environments

Five-Point Adjustment

Five separate points of adjustment allow for a tailored fit

Dual auto-resetting lanyard keepers

Re-usable and convenient stowage of unused connector legs

Heavy-duty rubber web ends

Easy adjustment with gloves on

Wider yoke on the neck

Prevents chaffing

Dual impact indicators

Deploys if exposed to excessive force to facilitate improved inspection

Leg Connection Options

Available with PT or TB Legs

Specifications

User weight range (including all clothing, tools, and equipment)

OSHA & CSA | 100-420 lb (45,3-190,5 kg)

ANSI | 130-310 lb (58,9-140,6 kg)

Materials | Polyester, stainless steel, galvanized steel, & zinc-plated steel

Buckle types



Pass-Through



Tongue Buckle

Declaration of conformity

Have been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI/ASSP Z359.7.

This product is compliant with the following safety regulations and consensus standard:

ANSI Z359.11-2021 | OSHA 1910.140 & 1926.502 | CSA Z259.10-2018

For more information:

+1 (800) 466 6385

customer.service@guardianfall.com




Designed and tested in the United States

VELOCITY

Full Body Harness



Sizing guide

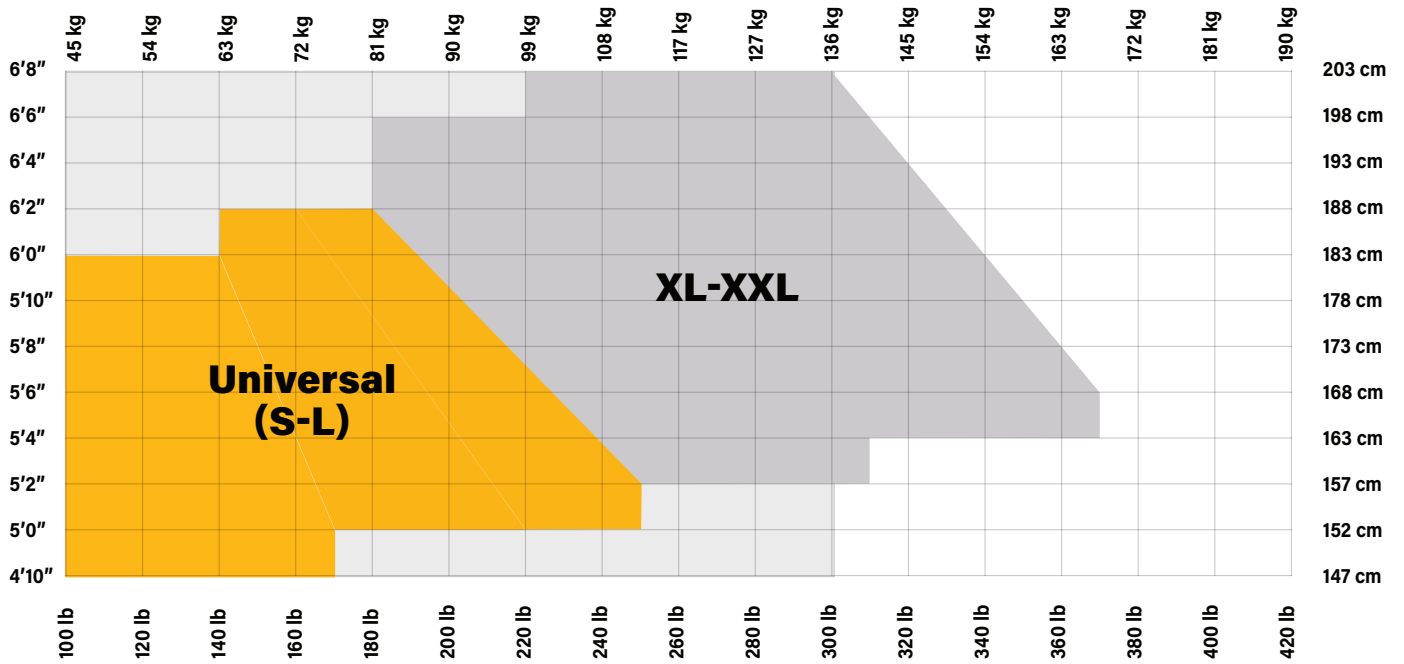

Part numbers	Description	Sizes
01700	PT chest, PT legs	Universal (S-L)
01703	PT chest, TB legs	Universal (S-L)
01704	PT chest, TB legs	XL-XXL
01705	PT chest, TB legs, hip D-rings	Universal (S-L)
01706	PT chest, TB legs, hip D-rings	XL-XXL

PT = Pass-Through | TB = Tongue-Buckle

Declaration of conformity

Have been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI/ASSP Z359.7.

This product is compliant with the following safety regulations and consensus standard:
ANSI Z359.11-2021 | OSHA 1910.140 & 1926.502 | CSA Z259.10-2018

For more information:

+1 (800) 466 6385

customer.service@guardianfall.com



Designed and tested in the United States