



MCP1650-V00AE30-OPC

Mellanox® MCP1650-V00AE30 Compatible 200GBase-CU QSFP56 to QSFP56 Direct Attach Cable (Passive Twinax, 0.5m)

Features

- Compliant with SFF-8636
- Compliant with IEEE802.3bj & IEEE802.3cd
- Support I2C two line strong interface, easy to control
- Hot-pluggable
- Operating Temperature: -20 to 75 Celsius
- Low Crosstalk
- Low power
- RoHS Compliant and Lead-Free



Applications:

- 10G/40G/100G/200G Ethernet
- Infiniband SDR, DDR, QDR, FDR, EDR, HDR
- Data center, cloud server

Product Description

This is a Mellanox® MCP1650-V00AE30 compatible 200GBase-CU QSFP56 to QSFP56 direct attach cable that operates over passive copper with a maximum reach of 50cm (1.6ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

Electrical Characteristics

Parameter		Requirement					Test Condition	
Differential Impedance								
Cable Impedance		105+5/-10Ω					Rise time of 25ps (20% ~ 80%).	
Paddle Card Impedance		100±10Ω						
Cable Termination Impedance		100±15Ω						
Differential (Input/Output) Return Loss SDD11/SDD22		$\text{Return_loss}(f) \geq \left\{ \begin{array}{ll} 16.5-2\sqrt{f} & 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) & 4.1 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the return loss at frequency f					10MHz≤f ≤19GHz	
Differential to common mode (Input/Output) Return loss SCD11/SCD22		$\text{Return loss}(f) \geq \left\{ \begin{array}{ll} 22-(20/25.78)f & 0.01 \leq f < 12.89 \\ 15-(6/25.78)f & 12.89 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the Differential to common-mode return loss at frequency f					10MHz≤f ≤19GHz	
Common mode to common- mode (Input/Output) Return loss SCC11/ SCD22		Return loss (f)≥ 2dB 0.2≤f≤19 Where f is the frequency in GHz Return loss (f) is the common-mode to common-mode return loss at frequency f					10MHz≤f ≤19GHz	
Low Level Contact Resistance		70 milliohms Max. From initial.					EIA-634-23: Apply a maximum voltage of 20mV and current of 100 mA.	
Insulation Resistance		10 Mohm (Min)					EIA364-21:AC 300V 1minute	
Dielectric Withstanding Voltage		NO disruptive discharge					EIA-364-20: Apply a voltage o f 300 VDC for 1 minute between adjacent terminals and between adjacent terminals and ground	
Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture								
Differential Insertion Loss (SDD21 Max)	F AWG	1.25GHz	2.5GHz	5.0GHz	7.0GHz	10Ghz	12.89Ghz	10MHz≤f ≤19GHz
	30(1m) Max.	4.5dB	5.4dB	6.3dB	7.5dB	8.5dB	10.5dB	
	30/28(3m)Max.	7.5dB	9.5dB	12.2dB	14.8dB	18.0dB	21.5dB	
	26(3m) Max.	5.7dB	7.2dB	9.9 dB	11.9dB	14.1dB	16.5dB	
	26/25(5m)Max.	7.8dB	10.0dB	13.5dB	16.0dB	19.0dB	22.0dB	
Insertion Loss Deviation		-0.176*f - 0.7 ≤ ILD ≤ 0.176* f + 0.7					50MHz≤f ≤19GHz	
Differential to common mode conversion Loss-Differential Insertion Loss (SCD21-SDD21)		$\text{Conversion loss}(f) - \text{IL}(f) \geq \left\{ \begin{array}{ll} 10 & 0.01 \leq f < 12.89 \\ 27-(29/22)f & 12.89 \leq f < 15.7 \\ 6.3 & 15.7 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Conversion_loss (f) is the cable assembly differential to common-mode conversion loss IL (f) is the cable assembly insertion loss					10MHz≤f ≤19GHz	

MDNEXT (multiple disturber near-end crosswalk)	≥26dB @12.89GHz	10MHz≤f ≤19GHz
Intra Skew	15ps/m	10MHz≤f ≤19GHz

Environment Performance

Parameter	Requirement	Test Condition
Operating Temperature Range	-20°C to +75°C	Cable operating temperature range
Storage Temperature Range	-40°C to +80°C	Cable storage temperature range in packed condition
Thermal Cycling Non-Powered	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min, dwells
Salt Spraying	48 hours salt spraying after shell corrosive area less than 5%	EIA-364-26
Mixed Flowing Gas	Pass electrical tests per 3.1 after stressing (Fpr connector only)	EIA-364-35 Class II, 14 days.
Temp. Life	No evidence of physical damage	EIA-364-17C w/RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
Cable Cold Bend	4H No evidence of physical damage	Condition: -20°C ±2°C, mandrel diameter is 6 times the cable diameter.

Mechanical and Physical Characteristics


Parameter	Requirement	Test Condition
Vibration	Pass electrical tests per 3.1 after stressing	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis
Cable Flex	No evidence of physical damage	Flex cable 180° for 20 cycles (±90° from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
Cable Plug Retention in Cage	90N Min. No evidence of physical damage	Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1 Pull on cable jacket approximately 1 ft behind cable plug. No functional damage to cable plug below 90N. Per SFF-8432 Rev 5.0
Cable Retention in Plug	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
Mechanical Shock	Pass electrical tests Per 3.1 after stressing	Clamp and shock per EIA-364-27B, TC- G,3 times in 6 directions, 100g, 6ms.
Cable Plug Insertion	40N Max (QSFP28)	Per SFF8661 Rev 2.1
Cable plug Extraction	30N Max (QSFP28)	Place axial load on de-latch to de-latch plug. Per SFF8661

		Rev 2.1
Durability	50 cycles, No evidence of physical damage	EIA-364-09, perform plug &unplug cycles:Plug and receptacle mate rate: 250times/hour. 50times for QSFP28/SFP28 module (CONNECTOR TO PCB)

Wiring Diagram

X1	X2	Remarks	X1	X2	Remarks
18 (RX1-)	37(TX1-)	Pair	37(TX1-)	18 (RX1-)	Pair
17 (RX1+)	36 (TX1+)		36 (TX1+)	17 (RX1+)	
15 (RX3-)	34 (TX3-)	Pair	34 (TX3-)	15 (RX3-)	Pair
14 (RX3+)	33 (TX3+)		33 (TX3+)	14 (RX3+)	
6 (TX4+)	25 (RX4+)	Pair	25 (RX4+)	6 (TX4+)	Pair
5 (TX4-)	24 (RX4-)		24 (RX4-)	5 (TX4-)	
3 (TX2+)	22 (RX2+)	Pair	22 (RX2+)	3 (TX2+)	Pair
2 (TX2-)	21 (RX2-)		21 (RX2-)	2 (TX2-)	
1, 4, 7, 13, 16, 19, 20, 23, 26, 32,35,38	1, 4, 7, 13, 16, 19,20, 23, 26, 32, 35, 38	GND	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	EEPROM point at both ends

Mechanical Specifications

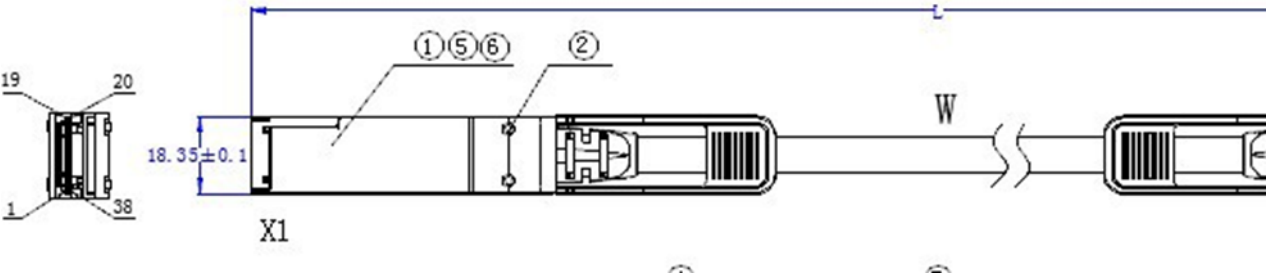

UNIT: mm

OptioConnect

Innovation for the Future of High-Speed Networking

Who We Are

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

What We Do

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

Smarter Networks by Design

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

Our Team

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

Our Mission

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

Let's Connect

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

www.optioconnect.com | info@optioconnect.com

