


SAWHORSE

Part #: TS27; TS35

Instructions

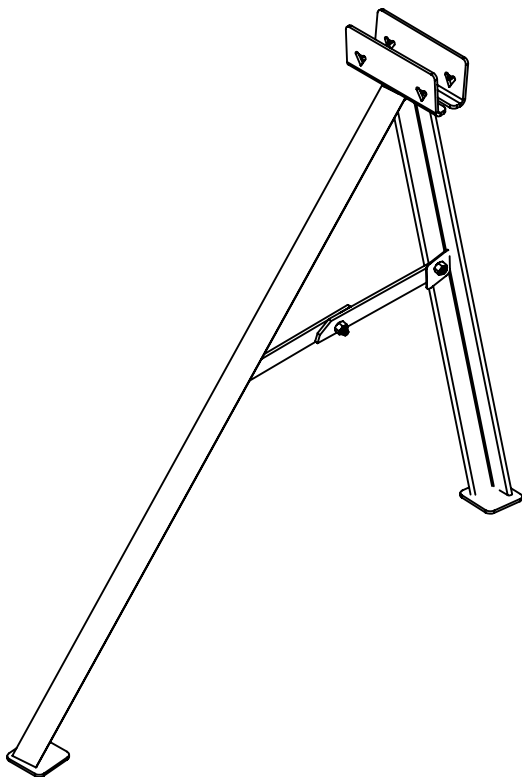

Part # TS-35

⚠ WARNING! Locking Arms may injure hand or fingers if used to open and close Sawhorse Leg Brackets.

⚠ WARNING ALWAYS WEAR APPROPRIATE PROTECTIVE EQUIPMENT.

⚠ WARNING! FAILURE TO READ AND FOLLOW INSTRUCTIONS ON THE USE OF THIS PRODUCT COULD RESULT IN SERIOUS INJURY OR DEATH.

✗ Do not throw instructions away.

⚠ Read and understand instructions before using this equipment.

Care and Maintenance

⚠ NOTE Inspect Sawhorse before each use to be sure that there is no damage or deformation, or deterioration from rusting and immediately remove from service if defects or damage is found.

⚠ NOTE Do not throw or drop from a building or onto a truck.

⚠ WARNING! NEVER use Sawhorse as a scaffold or for purposes of fall protection.

⚠ WARNING! NEVER make any connections to Sawhorse. Sawhorse must be stable during use.

⚠ WARNING! NEVER climb or lean on Sawhorse.

⚠ WARNING! Use away from hazards including, but not limited to, extreme temperature, corrosive substances, and electrical shock.

⚠ NOTE Do not use if wet or frozen.

General Requirements

⚠ NOTE With extended use, Sawhorse Leg Brackets may loosen from the 2x4 in cross-member.

⚠ NOTE Prior to EACH use, check gripping teeth for maximum contact with wood to ensure stability of Sawhorse system.

⚠ NOTE Always use your foot to clamp and unclamp Sawhorse Legs from 2x4 in board.

Part #	Description
TS27	Sawhorse, Portable, 27 in, A36 Alloy, Blue powder coated
TS35	Sawhorse, Portable, 35 in, A36 Alloy, Blue powder coated

Tools Required

- 7/16 in wrench

Installation

■ Step 1

Ensure Sawhorse Legs and Locking Arm components lap right over left when in an upright position.

■ Step 2


Insert bolt through top of Sawhorse Legs and tighten with 7/16 in wrench until snug.

■ Step 3

Insert bolt through center of both Locking Arms, secure with nut, and tighten with 7/16 in wrench until snug.

■ Step 4

In order, insert bolt through Sawhorse Leg, washer, Locking Arm, and Pinch Guard, secure with nut, and tighten with 7/16 in wrench until snug. DO NOT over-torque nuts.

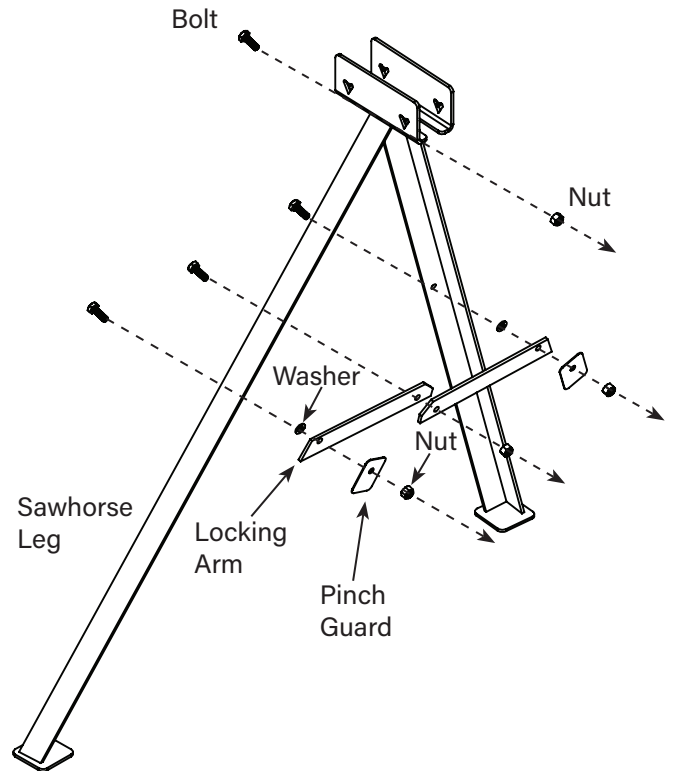

USA

607 East Sam Houston Parkway South
Suite 800
Pasadena, TX 77503
800 466 6385
customer.service@guardianfall.com

CANADA

580 Notre Dame Avenue, Unit 16
Sudbury, ON
P3C 5L2
800 466 6385
customer.service@guardianfall.com

WARRANTY: Guardian warrants to Buyer that all products are free from defects in material, workmanship, and design (if a Supplier-responsible design), however this warranty does not cover conditions resulting from normal wear and tear, neglect, abuse, accident or otherwise. Guardian's obligations under this warranty apply for the lifetime of the products and are limited to the replacement of product only. This warranty is not transferable to any other Guardian service and does not apply to product that is resold after having been put into service. No other person, firm, entity, or the like is authorized to assume or assign for Guardian any other liability in connection with the sale or use of Guardian's products. Furthermore, this warranty is void if any product is changed or altered in any way, or if the product is used in a manner other than for which it is intended. There are no implied warranties of merchantability or fitness for a particular purpose, which are specifically disclaimed.