

# Belt Adaptor D-Ring

Installation and Usage Instructions

85476 (Rev. A)

## IMPORTANT NOTES:

- Inspect prior to each use and discard if rips, tears, excessive wear, or cracks are noted.
- Max Load 6 lbs; Max tether length 5'
- Where applicable read caution on the belt where the belt adapters will be installed

PART NO.	MAX. TETHER	MAX. WEIGHT
----------	-------------	-------------

BLTADDEE	5' long	6 lbs.
----------	---------	--------

## WARNINGS

ALWAYS WEAR APPROPRIATE PROTECTIVE EQUIPMENT. DO NOT USE THIS PRODUCT ON OR NEAR ROTATING EQUIPMENT. IMPROPER USE COULD RESULT IN DEATH OR DISMEMBERMENT. IF ANY CRACKS, RIPS OR TEARS NOTED, PRODUCT REPLACEMENT IS REQUIRED.




1 Slide the tip of the desired belt through the opening of the belt adaptor. Continue sliding to the desired location which provides the most comfort and convenience.



2 If using multiple D-Ring adaptors simply slide the next one on as describe in step 1 and adjust accordingly.



3 Once in place choose the desired tether ready tools or tether to connect to the D-Ring.

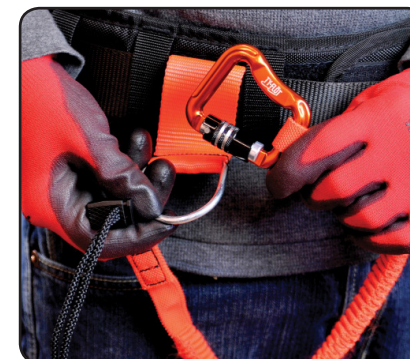

4 When needing to use a tool (if used to store tools) remove the tether from the D-Ring and attach to the connection point such as a wrist lanyard or other connection point.

# INSTALLATION



Ty-Flot, Inc. • 305 Massabesic Street • Manchester, NH 03103  
www.ty-flot.com • Phone: 603-669-5169 • Fax: 603-669-5113

THE DROP STOPS HERE