

# DoubleUp™ Tool Lanyard

## Installation and Usage Instructions

85559 (Rev. A)

### IMPORTANT NOTES:

- Never let the retractor freely retract, always hold the tool when being retracted back into the retractor housing.
- Inspect prior to use and replace the unit if any of the following are found:
  - Rips, tears or fraying of the fabric.
  - Malfunctioning carabiner, distortion of the split ring, and any damage or stress noted on the rope or wire cable. Particular attention should be given to the terminating end where the cable attaches to the key ring receptacle as this is the “business end” and stresses can occur due to bending and twisting of the cable.
- Always install tools in a safe location as a precaution should a tool drop during installation.

**IF THE RETRACTOR EXPERIENCES A VERTICAL DROP WHEREBY THE WIRE IS PULLED FROM THE HOUSING REACHING ITS HARD STOP, THEN REPLACE THE ENTIRE UNIT AS A PRECAUTION.**

### TOOL RATINGS

PART NO.	TOOL WEIGHT LIMIT
RETDOBL	1.5 LBS
RETDOBLSNP	1.5 LBS

### WARNINGS

ALWAYS WEAR APPROPRIATE PROTECTIVE EQUIPMENT. DO NOT USE THIS PRODUCT ON OR NEAR ROTATING EQUIPMENT. IMPROPER USE COULD RESULT IN DEATH OR DISMEMBERMENT. IF ANY CRACKS, RIPS OR TEARS NOTED, PRODUCT REPLACEMENT IS REQUIRED.




1 Choose the desired belt that will be used to support the retractor and slide the belt through the belt loop portion of the retractor. Continue feeding the belt through the belt hoop until in the desired location. Follow the belt instructions if using one of the Ty-Flot branded belts.




2 If using a pouch to house the tool, install the pouch on the belt adjacent to the retractor and insert the tool into the pouch. If using 2 tools an additional pouch can be added on the opposite side of the retractors. For those tools that are lighter than the retraction force of the retractor, a pouch may not be needed to house the tool. User is to determine the suitability of the tool being used and to determine whether the tool should be housed in a pouch.



3 Using the RETDOBLSNP, the storage snap hooks can be used to contain the tools during tool transfers eliminating accidental drops by securing the tool 100% of the time.

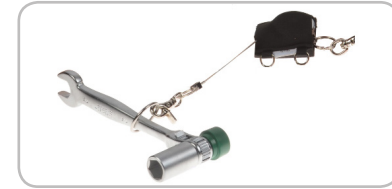

4 Using the supplied attachments points installed on the retractor, attach either the key ring (RETDOBL) or snap hook (RETDOBLSNP) to the desired tool.

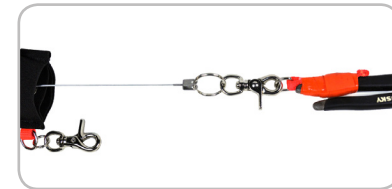

5 When using the tool simply pull the tool allowing the cable to be pulled from the housing. When finished allow the retractor to pull the cable back into the retractor and safely store the tool when not in use.



6 RETDOBL series doesn't offer the snap hooks and additional storage.

# INSTALLATION



Ty-Flot, Inc. • 305 Massabesic Street • Manchester, NH 03103  
www.ty-flot.com • Phone: 603-669-5169 • Fax: 603-669-5113

**THE DROP STOPS HERE**