



# High Strength Heat Shrink For Hammers and Ratchets

## Installation and Usage Instructions

Please read instructions carefully and fully before installation and/or usage.

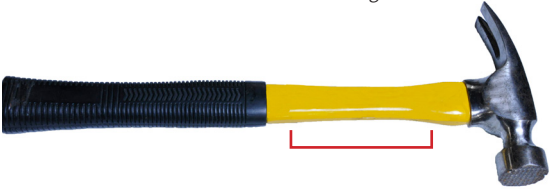

- 1 Identify the location on the tool that is most suitable for the heat shrink loop. If installing at the end of the handle be sure there is sufficient geometry to prevent the attachment from coming off when installed.

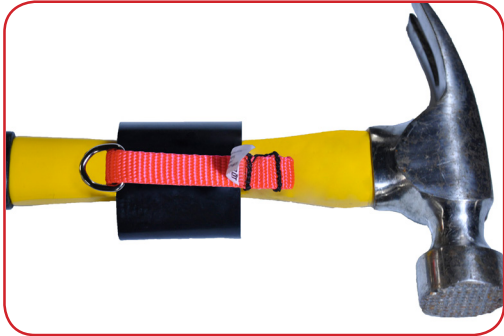

- 2 Next, slide the heat shrink loop to the desired installation location.



- 3 In a well ventilated area begin using a heat gun to secure it in place. Be sure to heat the heat shrink evenly along the length and 360° and under the webbing.

## TOOL SELECTION GUIDE

Part No.	Max Tool Weight	Tool Range
TP2R17X2LPHMROR	6 lbs	0.55" to 1.50"

**CAUTIONS:** DO NOT USE THIS PRODUCT ON OR NEAR ROTATING EQUIPMENT. IMPROPER USE COULD RESULT IN DEATH OR DISMEMBERMENT. INSPECT PRIOR TO USE, IF ANY CRACKS, RIPS OR TEARS ARE NOTED, PRODUCT REPLACEMENT IS REQUIRED. CHARRING OR BURNING THE HEAT SHRINK WILL PRODUCE FUMES THAT MAY CAUSE EYE, SKIN, NOSE AND THROAT IRRITATION. ALWAYS USE PROPER PPE WHEN USING OR INSTALLING THIS PRODUCT.

Tested in accordance with QAS-8.3

INSTALLATION



Ty-Flot, Inc. • 305 Massabesic Street • Manchester, NH 03103  
www.ty-flot.com • Phone: 603-669-5169 • Fax: 603-669-5113  
**THE DROP STOPS HERE**