




Dual Fuel Boiler SUBMITTAL DATA SHEET

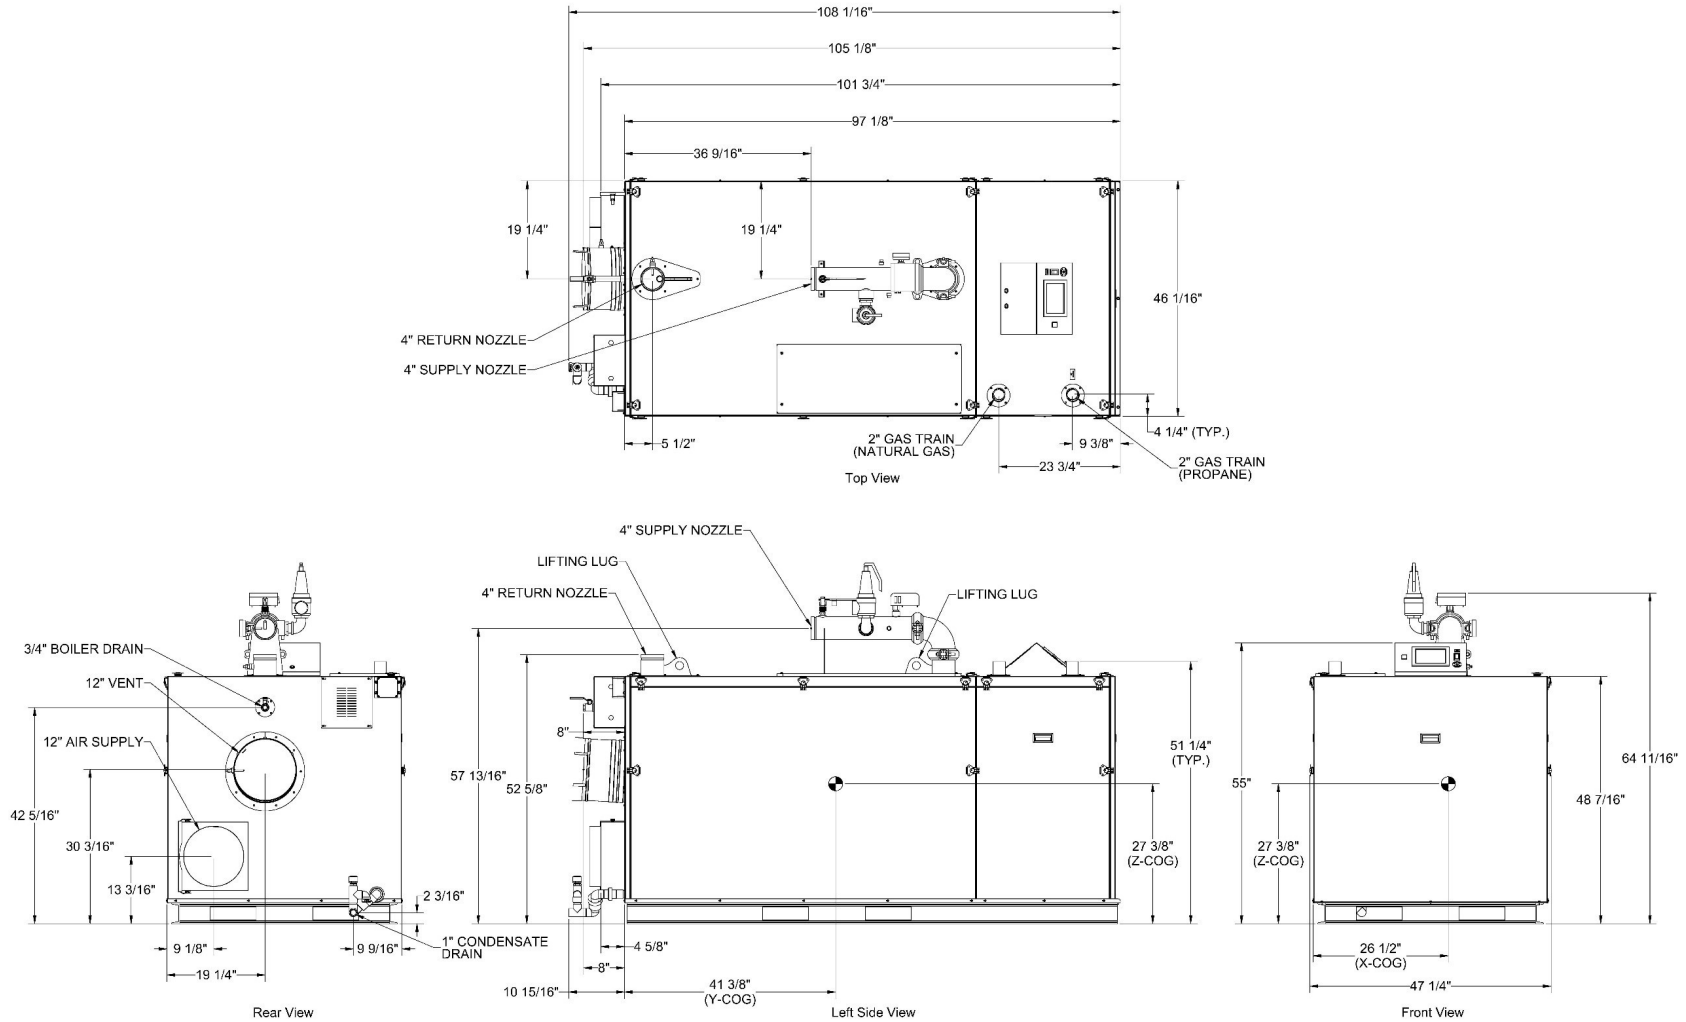

AMP-4000 DF

**INNOVATIVE EQUIPMENT FOR
HOT WATER SYSTEMS**

Updated 2/24/26

PO BOX 3244 | LANCASTER, PA 17601

Dual Fuel

WWW.THERMALSOLUTIONS.COM

ABC260201



Dual Fuel Boiler SUBMITTAL DATA SHEET

| RATINGS AND CAPACITIES | | |
|-------------------------------------------------|--------------------------------|------------------------|
| Input - Low fire: | 799,000 | BTU/HR |
| Input - High Fire: | 3,999,000 | BTU/HR |
| Output - High Fire: | 3,879,000 | BTU/HR |
| Boiler Horsepower: | 116 | BHP |
| Recovery Rate(based on 100°F temperature rise): | 97 | Gallons Per Hour (GPH) |
| Thermal / Combustion Efficiency %: | 97 | |
| Heating Surface: | 403 | Sq.Ft. |
| Water Vol. (gal): | 47 | Gallons |
| Fuel: | Natural Gas and / or LP | Dual Fuel |
| Firing Rate: | Full Modulation | |
| Burner Turndown: | 5:1 | |
| Low NOx Emissions: | <10 ppm | |
| Inlet Gas Pressure (NG): | 4" (Min.) / 14" (Max.) | |
| Inlet Gas Pressure (LP): | 8" (Min.) / 14" (Max.) | |
| Approx. Shipping Weight (lb): | 2,485 | lbs. |

| FLOWS AND PRESSURE DROPS | | |
|--------------------------|------------|----------------|
| Delta T | Flow (GPM) | Head Loss (ft) |
| 20° | 388 | 18.1 |
| 30° | 258 | 9.3 |
| 40° | 194 | 6.1 |

| Electrical Requirements: (Appliance Only) | | | | |
|-------------------------------------------|---------|-------|----|---------------|
| Model | Voltage | Phase | Hz | Max. Amp Draw |
| 2000-2500 | 120 | 1 | 60 | 13.5 |
| | 208 | | | 8.2 |
| | 240 | | | 7.7 |
| | 208 | 3 | 60 | 11 |
| | 240 | | | 9.9 |
| | 480 | | | 6.4 |
| 3000 | 208 | 1 | 60 | 14.1 |
| | 240 | | | 12.6 |
| | 208 | 3 | 60 | 9.9 |
| | 480 | | | 6.4 |
| 3500-4000 | 208 | 3 | 60 | 11 |
| | 240 | | | 9.9 |
| | 480 | | | 6.4 |

ASME Section IV (Max 160 PSIG / 210°F)



Setpoint range is 60-185°F

Adjustable, manual reset high limit setting of ≤ 200°F.

ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)

ETL Certified to ANSI Z21.13 / CSA 4.9

ETL Certified to UL 795 / CSA 3.1

| DIMENSIONS / CONNECTIONS | | |
|-----------------------------|---------------|----------|
| Height: | 55 | (Note 1) |
| Width: | 46 | (Note 2) |
| Length: | 97-1/8 | (Note 3) |
| Water Outlet Pipe (FNPT): | 4 | |
| Water Inlet Pipe (MNPT): | 4 | |
| Vent Connection: | 12 | |
| Air Intake Connection: | 12 | |
| Condensate Drain (PVC): | 1 | |
| Drain Line Connection: | 3/4 | |
| Gas Inlet Connection (FPT): | 2 | |

| NOTES: |
|-----------------------------------------------------|
| 1. Height dimension is from floor to top of jacket. |
| 2. Length is from jacket front to jacket rear. |
| 3. Dimensions shown are for reference only |
| 4. Refer to manual for gas supply piping charts |



Dual Fuel Boiler SUBMITTAL DATA SHEET

STANDARD EQUIPMENT

PRESSURE VESSEL DESIGN

Stainless Steel Heat Exchanger
 ASME Section IV Certified, "H" Stamp
 MAWP 160 PSIG & Max Temp 210°F
 Setpoint range is 60-185°F
 Adjustable, manual reset high limit setting of ≤ 200°F.
 ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)
 Ten Year Limited Pressure Vessel Warranty

COMBUSTION DESIGN

| | |
|--------------------------------|----------------------------------|
| Stainless Steel Pre-Mix Burner | Zero governor gas valve |
| Low NOx Emissions (< 10 ppm) | Variable Speed Combustion Blower |
| Full Modulation, 5:1 Turndown | Air Proving Switch |
| Blocked Vent Switch | Blocked Vent Switch |

Natural Gas, Propane or Dual Fuel (Gas/Gas)
 4" wc (8" wc Propane) to 14" wc inlet gas pressure
 Manual fuel changeover switch (Dual Fuel Only)
 4" wc (8" wc Propane) to 14" wc inlet gas pressure
 High/Low gas pressure switches, manual reset
 Direct Spark Ignition System with UV Scanner

VENTING

Category II or IV Venting
 Individual or Common (Engineered) Vent System
 Vertical or Horizontal
 CPVC, PP or SS Venting *Materials Acceptable
 Combustion Air Intake - Sealed or Room

BOILER EQUIPMENT

| | |
|-------------------------------------------|------------------------------|
| Concert™ Control (24 Vac) | Water Flow Switch |
| High Limit Temp Control, Manual Reset | Condensate trap |
| Low water cutoff, manual reset | Blocked Condensate Switch |
| Supply & Return Water Temperature Sensors | Pressure & Temperature Gauge |
| | Flue Gas Temperature Sensor |

ASME Relief Valve: (Available: 30, 50, 60, 75, 100, 125 or 150 psig)

ELECTRICAL DESIGN

Models 2000-2500:

- 120-208-230VAC/60HZ/1PH - High Voltage
 (2000 to 2500 - Optional 208-230-460VAC/60HZ/3PH)

Models 3000:

- 208-230-240VAC/60HZ/1PH - High Voltage
 - 208-230-240-460VAC/60HZ/3PH - High Voltage

Models 3500-4000:

- 208-230-240-460VAC/60HZ/3PH - High Voltage
 - PCB (Printed Circuit Board) Fused Connections
 24VAC/5VDC - Low Voltage PCB
 - EMS Communications
 (Dual RJ45 Jacks for Peer-To-Peer or ModBus)
 - Boiler Options (Sensors)
 - Pumps (Boiler, DHW, System) & Auxiliary Devices

* Flue system material shall be capable of continuous operation at 210°F or higher and shall be certified to UL 1738 – venting system for gas-burning appliances cat II, III and IV.



Dual Fuel Boiler SUBMITTAL DATA SHEET

OPTIONAL EQUIPMENT

- Hydronic Kit (Boiler Circulation Pump, Pump Flange Kit and Condensate Neutralizer)
- External High Limit Temperature Control, Manual Reset
- Condensate Neutralizer
- Supply Header Temperature Sensor: Direct Immersion Well Immersion (with Well)
- Outdoor Air Temperature Sensor (Wired)
- EMS Signal Converter Kit (Converts Energy or Building Management System 0-10v signal to 4-20mA)
- Motorized Isolation Valves
- Alarm Buzzer with Silencing Switch
- Gas Valve Proving Switch
- Vent Adapter - CPVC
- Universal Communications Gateway (BACnet, Metasys, Modbus or Lonworks)
- Stackable Rack
- Conductor Sequencing Panel Optional Isolation Relay Board

The Conductor manages multiple condensing & non-condensing, small & large heat output, new and/or existing boilers (full modulation or on-off), and steam or hot water applications. It helps improve system efficiency by selecting and modulating the right boiler to match operating conditions. The Conductor offers a single point boiler plant Energy Management System (EMS) interface including Modbus TCP/IP, Modbus RTU RS485, BACnet/IP and BACnet MSTP standard. If Lonworks needed, add for the separate Lonworks gateway.


EXTENDED WARRANTY

- 3-Year Parts
- 5-Year Parts
- 10-Year Parts
- 5-Year Parts/Labor
- 10-Year Parts/Labor



Dual Fuel Boiler SUBMITTAL DATA SHEET

CONCERT CONTROL FEATURES

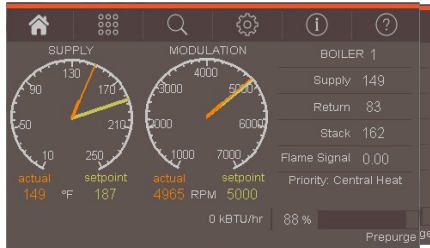

Dashboard - Color Touchscreen Display, 4"

- Intuitive Icon Navigation
- "Quick" Setup Menus
- *Real Time BTU/H Display

Two (2) Temperature Demand Inputs

- Outdoor Air Reset Curve for Each Input
- Time of Day Setback Capability
(Enviracon Thermostat must be installed)

Three (3) Pump Control

- Boiler Pump With On/Off or Variable Speed Control
- Domestic Hot Water (DHW) Pump
- System Pump
- Alternative Control to Combustion
 - Air Damper or Standby Loss Damper
- Pump Overrun for Heat Dissipation
- Pump Exercise
- Pump Rotor Seizing Protection

Peer-to-Peer Boiler Communications

- Multiple Size Boiler Sequencing Up to 8 Units
- *Two (2) Boiler Start/Stop Trigger
- Lead Boiler Automatic Rotation

Energy Management System (EMS) Interface

- *Firing Rate and Water Temperature Based Algorithms for Multiple Boilers; loss of EMS signal defaults to local boiler settings
- 420mAdc Input/Output (010Vdc Optional Converter)
- ModBus Input/Output (BACnet or LonWorks Optional Gateway)
- Simultaneous Interface with Peer-to-Peer

USB Data Port Transfer

- Upload Settings Between Boilers
- Download Parameters for Troubleshooting
- Import Data into .CRV Formatted Files for Performance Analysis

*** Unique to Concert**

Energy Efficiency Enhancer

- AntiCycling Technology
- Multiplier boiler base load common rate
- Outdoor Air Temperature Reset Curve
- Warm Weather Shutdown
- Boost Temperature & Time
- Ramp Delay
- OverTemperature Safeguarding

Self-Guiding Diagnostics

- Identifies Fault
- Describes Possible Problems
- Provides Corrective Actions
- Time/Date Stamp on Alarms and Lockouts

Unmatched Archives

- Historical Trends Collects Up to 4 months Data
- Event History Up to 3000 Alarms, Lockouts and Cycle & Run Times
- Alarm Limit String Faults, Holds, Lockouts and Others
- Cycle & Run Time Boilers & Pumps
- Resettable (Lockouts/Alarms/Cycles & Run Time)

Domestic Hot Water Priority

- DHW Tank Piped With Priority in the Boiler Loop
- DHW Tank Piped as a Zone in the System With the Pumps Controlled by the Concert Control
- DHW Modulation Limiting
- Status Screens
- Sensor Monitoring and Control

Other Features


- Factory Default Settings
 - Three Level Password Security
 - Frost Protection
- Contractor Contacts (Up to 3)
- Low Water Flow Safety Control & Identification
- Proportion Integral Derivative (PID) Parameters for Central Heat, DHW, Sequencer and Fan

Boiler Connect Compatible *

* Models 2000-4000 require Service Tool PCB14 Kit (PN# 113430-01) and one (1) Boiler Connect Bluetooth Adapter Kit (PN# 113329-01) per install or cascade.



Dual Fuel Boiler SUBMITTAL DATA SHEET

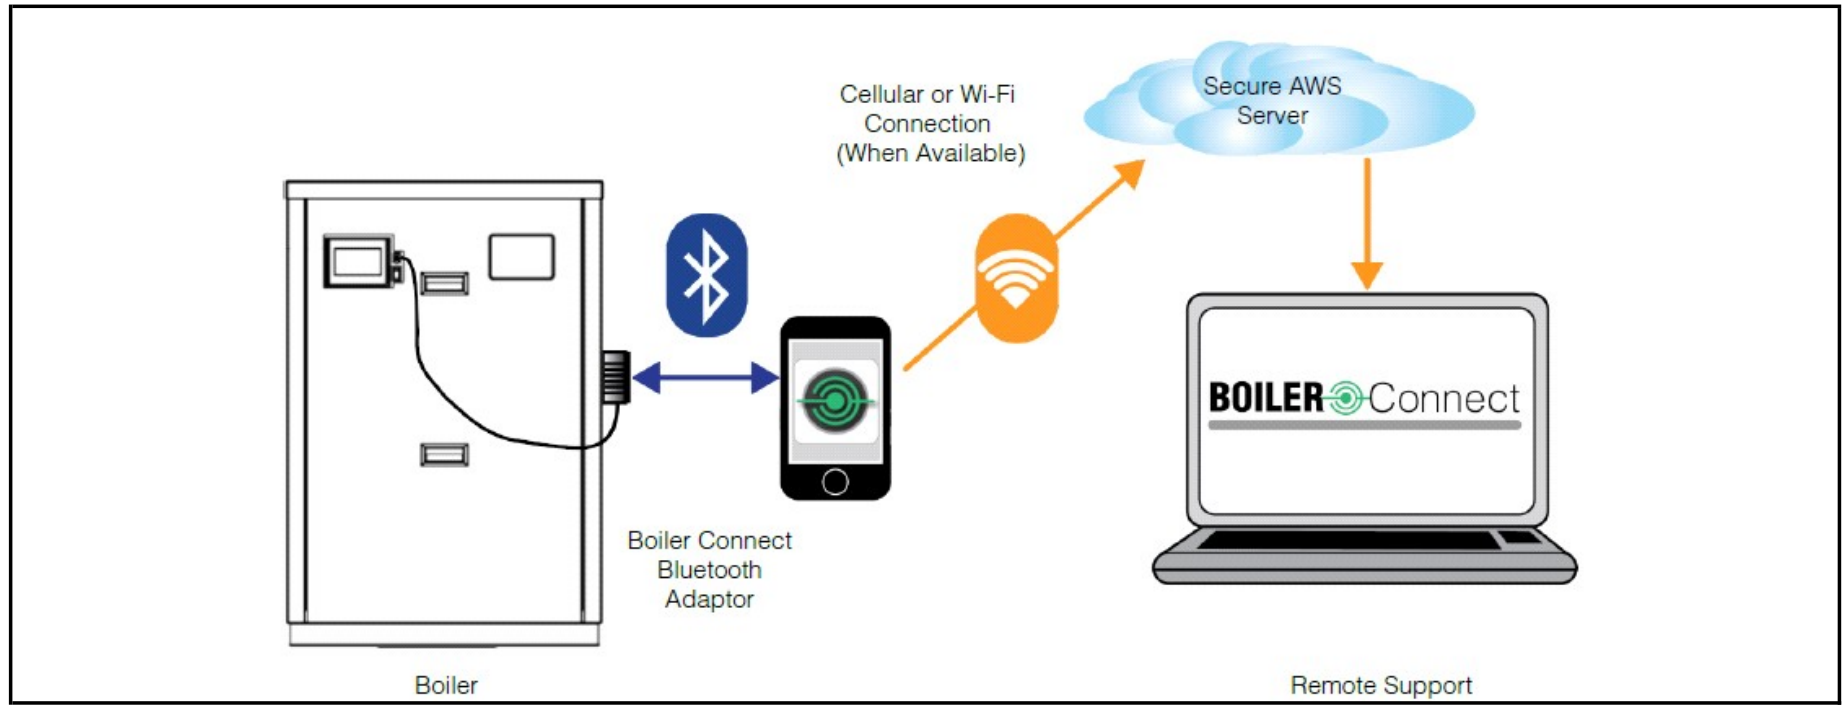

BOILER Connect

BOILER CONNECT FEATURES

- Bluetooth adaptor connects to the Boiler Connect App
- English or Spanish language
- Start-up, Troubleshooting Tips and Service Wizards
- Data logs, Service and Status Reports sent to the cloud
- Live Data Sharing (Cellular Service Required) with Technical Service Representative