




# Dual Fuel DHW SUBMITTAL DATA SHEET

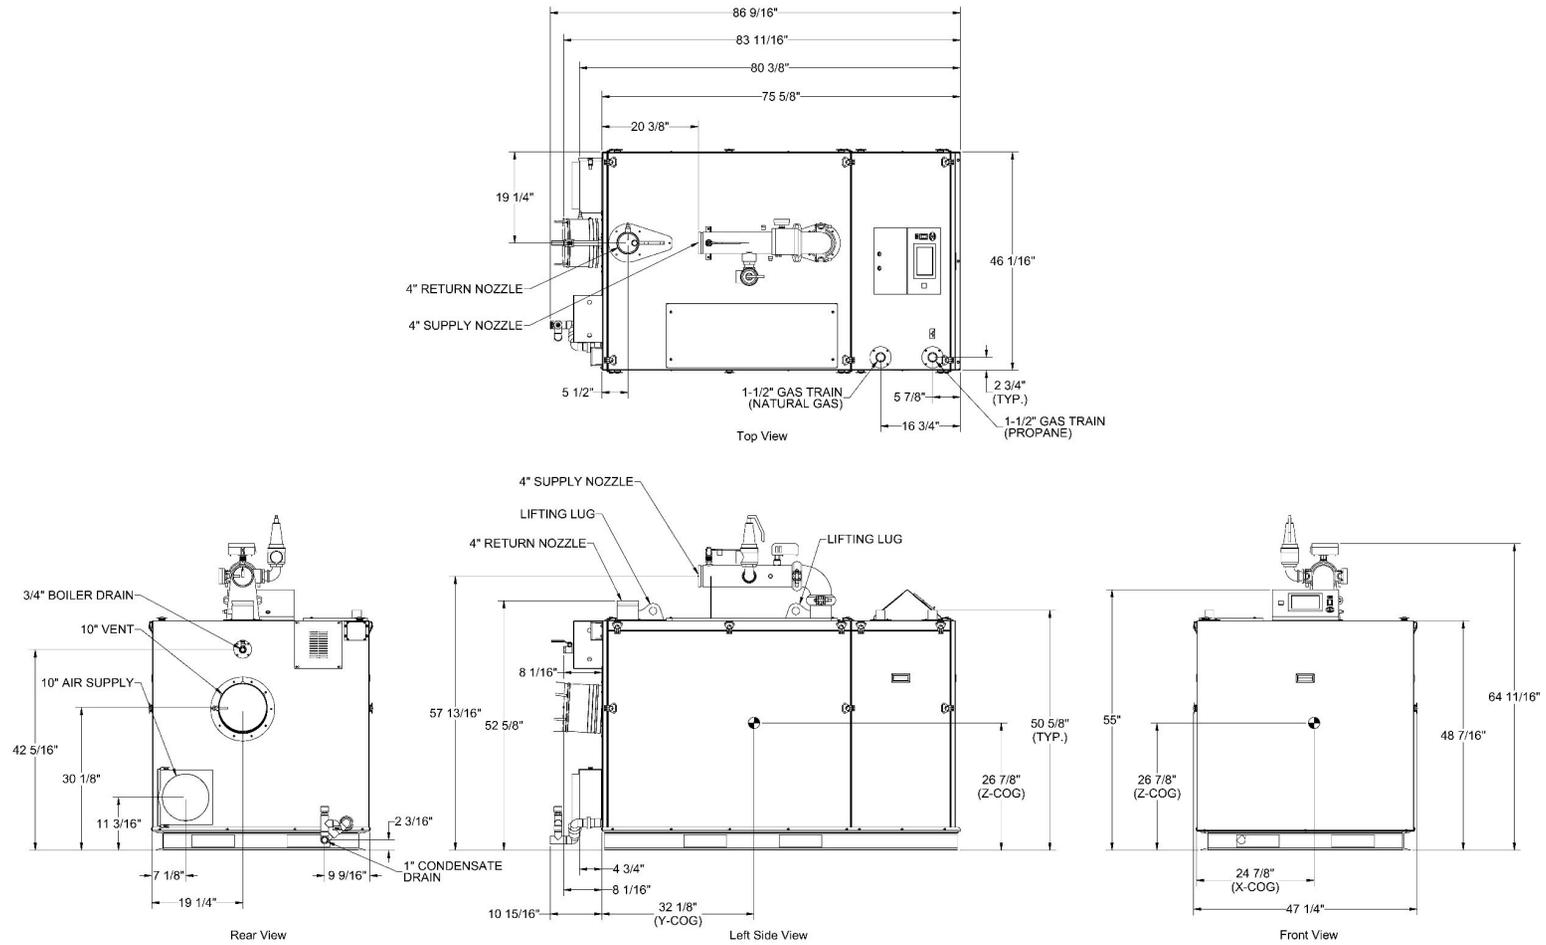

783 N Chili Ave | Peru, IN 46970

**BFITW-2500 DF**

**Dual Fuel**

Boiler Technology Leadership Since 1916

**HOT WATER SYSTEMS**

[www.bryanboilers.com](http://www.bryanboilers.com)

Updated 2/24/26

ABC260201



# Dual Fuel DHW SUBMITTAL DATA SHEET

| RATINGS AND CAPACITIES   |                         |                        |
|--|-------------------------|------------------------|
| Input - Low fire:  | 500,000                 | BTU/HR                 |
| Input - High Fire:   | 1,999,000               | BTU/HR                 |
| Output - High Fire:  | 2,425,000               | BTU/HR                 |
| Recovery Rate(per 100°F Temp Rise):  | 2,970                   | Gallons Per Hour (GPH) |
| Thermal Efficiency %:  | 97                      |                        |
| Heating Surface:   | 300                     | Sq.Ft.                 |
| Water Vol. (gal)   | 36                      | Gallons                |
| Fuel   | Natural Gas and / or LP | Dual Fuel              |
| Firing Rate:   | Full Modulation         |                        |
| Burner Turndown:   | 5:1                     |                        |
| Low NOx Emissions:   | <10 ppm                 |                        |
| Inlet Gas Pressure (NG):   | 4" (Min.) / 14" (Max.)  |                        |
| Inlet Gas Pressure (LP):   | 8" (Min.) / 14" (Max.)  |                        |
| Approx. Shipping Weight (lb)   | 2,038                   | lbs                    |
| ASME Section IV (Max 160 PSIG / 210°F)<br>Setpoint range is 60-185°F<br>Adjustable, manual reset high limit setting of ≤ 200°F.<br>ASME HLW stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)<br>ETL Certified to ANSI Z21.13 / CSA 4.9<br>ETL Certified to UL 795 / CSA 3.1 |                         |                        |



| FLOWS AND PRESSURE DROPS |            |                |                       |
|--------------------------|------------|----------------|-----------------------|
| Delta T                  | Flow (GPM) | Head Loss (ft) | Water Hardness (GPG)* |
| 20°                      | 245        | 15.7           | 12-15                 |
| 25°                      | 196        | 11.5           | 4-12                  |

| Electrical Requirements: (Appliance Only) |         |       |    |               |
|---|---------|-------|----|---------------|
| Model                                     | Voltage | Phase | Hz | Max. Amp Draw |
| 2000-2500                                 | 120     | 1     | 60 | 13.5          |
|   | 208     |       |    | 8.2           |
|   | 240     |       |    | 7.7           |
|   | 208     | 3     | 60 | 11            |
|   | 240     |       |    | 9.9           |
|   | 480     |       |    | 6.4           |
| 3000                                      | 208     | 1     | 60 | 14.1          |
|   | 240     |       |    | 12.6          |
|   | 208     | 3     | 60 | 9.9           |
|   | 480     |       |    | 6.4           |
| 3500-4000                                 | 208     | 3     | 60 | 11            |
|   | 240     |       |    | 9.9           |
|   | 480     |       |    | 6.4           |

| DIMENSIONS / CONNECTIONS    |        |          |
|-----------------------------|--------|----------|
| Height:                     | 55     | (Note 1) |
| Width:                      | 46     | (Note 2) |
| Length:                     | 75-5/8 | (Note 3) |
| Water Outlet Pipe (FNPT):   | 4      |          |
| Water Inlet Pipe (MNPT):    | 4      |          |
| Vent Connection:            | 10     |          |
| Air Intake Connection:      | 10     |          |
| Condensate Drain (PVC):     | 1      |          |
| Drain Line Connection:      | 3/4    |          |
| Gas Inlet Connection (FPT): | 2      |          |

| NOTES:  |
|---|
| 1. Height dimension is from floor to top of jacket. |
| 2. Length is from jacket front to jacket rear.      |
| 3. Dimensions shown are for reference only          |
| 4. Refer to manual for gas supply piping charts     |



# Dual Fuel DHW SUBMITTAL DATA SHEET

## STANDARD EQUIPMENT

### PRESSURE VESSEL DESIGN

Stainless Steel Heat Exchanger  
 ASME Section IV Certified, "HLW" Stamp  
 MAWP 160 PSIG & Max Temp 210°F  
 Setpoint range is 60-185°F  
 Adjustable, manual reset high limit setting of ≤ 200°F.  
 ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)  
 Ten Year Limited Pressure Vessel Warranty

### COMBUSTION DESIGN

|  |  |
|--|--|
| Stainless Steel Pre-Mix Burner                     | Zero governor gas valve                        |
| Low NOx Emissions (< 10 ppm)                       | Variable Speed Combustion Blower               |
| Full Modulation, 5:1 Turndown                      | Air Proving Switch                             |
| Natural Gas, Propane or Dual Fuel (Gas/Gas)        | Blocked Vent Switch                            |
| 4" wc (8" wc Propane) to 14" wc inlet gas pressure | Manual fuel changeover switch (Dual Fuel Only) |
| High/Low gas pressure switches, manual reset       | Direct Spark Ignition System with UV Scanner   |

### VENTING

Category II or IV Venting  
 Individual or Common (Engineered) Vent System  
 Vertical or Horizontal  
 CPVC, PP or SS Venting \*Materials Acceptable  
 Combustion Air Intake - Sealed or Room

### APPLIANCE EQUIPMENT

|  |                              |
|--|------------------------------|
| Concert™ Control (24 Vac)                      | Water Flow Switch            |
| High Limit Temp Control, Manual Reset          | Condensate trap              |
| Low water cutoff, manual reset                 | Blocked Condensate Switch    |
| Supply, Return & DHW Water Temperature Sensors | Pressure & Temperature Gauge |
| AMSE 150 PSE Relief Valve Standard             | Flue Gas Temperature Sensor  |

### ELECTRICAL DESIGN

#### **Models 2000-2500:**

- 120-208-230VAC/60HZ/1PH - High Voltage  
 (2000 to 2500 - Optional 208-230-460VAC/60HZ/3PH)

#### **Models 3000:**

- 208-230-240VAC/60HZ/1PH - High Voltage  
 - 208-230-240-460VAC/60HZ/3PH - High Voltage

#### **Models 3500-4000:**

- 208-230-240-460VAC/60HZ/3PH - High Voltage  
 - PCB (Printed Circuit Board) Fused Connections

#### **24VAC/5VDC - Low Voltage PCB**

- EMS Communications  
 (Dual RJ45 Jacks for Peer-To-Peer or ModBus)  
 - Boiler Options (Sensors)  
 - Pumps (Boiler, DHW, System) & Auxiliary Devices

\* Flue system material shall be capable of continuous operation at 210°F or higher and shall be certified to UL 1738 – venting system for gas-burning appliances cat II, III and IV.



# Dual Fuel DHW SUBMITTAL DATA SHEET

## OPTIONAL EQUIPMENT

- External High Limit Temperature Control, Manual Reset
- Condensate Neutralizer
- Supply Header Temperature Sensor:  Direct Immersion  Well Immersion (with Well)
- Outdoor Air Temperature Sensor (Wired)
- EMS Signal Converter Kit (Converts Energy or Building Management System 0-10v signal to 4-20mA)
- Motorized Isolation Valves
- Alarm Buzzer with Silencing Switch
- Gas Valve Proving Switch
- Vent Adapter - CPVC
- Universal Communications Gateway (BACnet, Metasys, Modbus or Lonworks)
- Stackable Rack
- Conductor Sequencing Panel

The Conductor manages multiple condensing & non-condensing, small & large heat output, new and/or existing boilers (full modulation or on-off), and steam or hot water applications. It helps improve system efficiency by selecting and modulating the right boiler to match operating conditions. The Conductor offers a single point boiler plant Energy Management System (EMS) interface including Modbus TCP/IP, Modbus RTU RS485, BACnet/IP and BACnet MSTP standard. If Lonworks needed, add for the separate Lonworks gateway.

## EXTENDED WARRANTY

- 3-Year Parts
- 5-Year Parts
- 10-Year Parts
- 5-Year Parts/Labor
- 10-Year Parts/Labor



# Dual Fuel DHW SUBMITTAL DATA SHEET

## CONCERT CONTROL FEATURES



### Dashboard - Color Touchscreen Display, 4"

- Intuitive Icon Navigation
- "Quick" Setup Menus
- \*Real Time BTU/H Display

### Two (2) Temperature Demand Inputs

- Outdoor Air Reset Curve for Each Input
- Time of Day Setback Capability  
(Envircom Thermostat must be installed)

### Three (3) Pump Control

- Boiler Pump With On/Off or Variable Speed Control
- Domestic Hot Water (DHW) Pump
- System Pump
- Alternative Control to Combustion
  - Air Damper or Standby Loss Damper
- Pump Overrun for Heat Dissipation
- Pump Exercise
- Pump Rotor Seizing Protection

### Peer-to-Peer Boiler Communications

- Multiple Size Boiler Sequencing Up to 8 Units
- \*Two (2) Boiler Start/Stop Trigger
- Lead Boiler Automatic Rotation

### Energy Management System (EMS) Interface

- \*Firing Rate and Water Temperature Based
  - Algorithms for Multiple Boilers; loss of EMS signal defaults to local boiler settings
- 420mAdc Input/Output (010Vdc Optional Converter)
- ModBus Input/Output (BACnet or LonWorks Optional Gateway)
- Simultaneous Interface with Peer-to-Peer
- USB Data Port Transfer

### USB Data Port Transfer

- Download Parameters for Troubleshooting
- Import Data into .CRV Formatted Files for Performance Analysis

\* Unique to Concert

### Energy Efficiency Enhancer

- AntiCycling Technology
- Multiplier boiler base load common rate
- Outdoor Air Temperature Reset Curve
- Warm Weather Shutdown
- Boost Temperature & Time
- Ramp Delay
- OverTemperature Safeguarding

### Self-Guiding Diagnostics

- Identifies Fault
- Describes Possible Problems
- Provides Corrective Actions
- Time/Date Stamp on Alarms and Lockouts

### Unmatched Archives

- Historical Trends Collects Up to 4 months Data
- Event History Up to 3000 Alarms, Lockouts and Cycle & Run Times
- Alarm Limit String Faults, Holds, Lockouts and Others
- Cycle & Run Time Boilers & Pumps
- Resettable (Lockouts/Alarms/Cycles & Run Time)

### Domestic Hot Water Priority

- DHW Tank Piped With Priority in the Boiler Loop
- DHW Tank Piped as a Zone in the System With the Pumps Controlled by the Concert Control
- DHW Modulation Limiting
- Status Screens
- Sensor Monitoring and Control


### Other Features

- Factory Default Settings
  - Three Level Password Security
  - Frost Protection
- Contractor Contacts (Up to 3)
- Low Water Flow Safety Control & Indication
- Proportional Integral Derivative (PID) Parameters for Central Heat, DHS, Sequencer and Fan

### Boiler Connect Compatible \*

\* Models 2000-4000 require Service Tool PCB14 Kit (PN#113430-01) and one (1) Boiler Connect Bluetooth Adapter Kit (PN#113329-01) per install or cascade.

# Dual Fuel DHW SUBMITTAL DATA SHEET

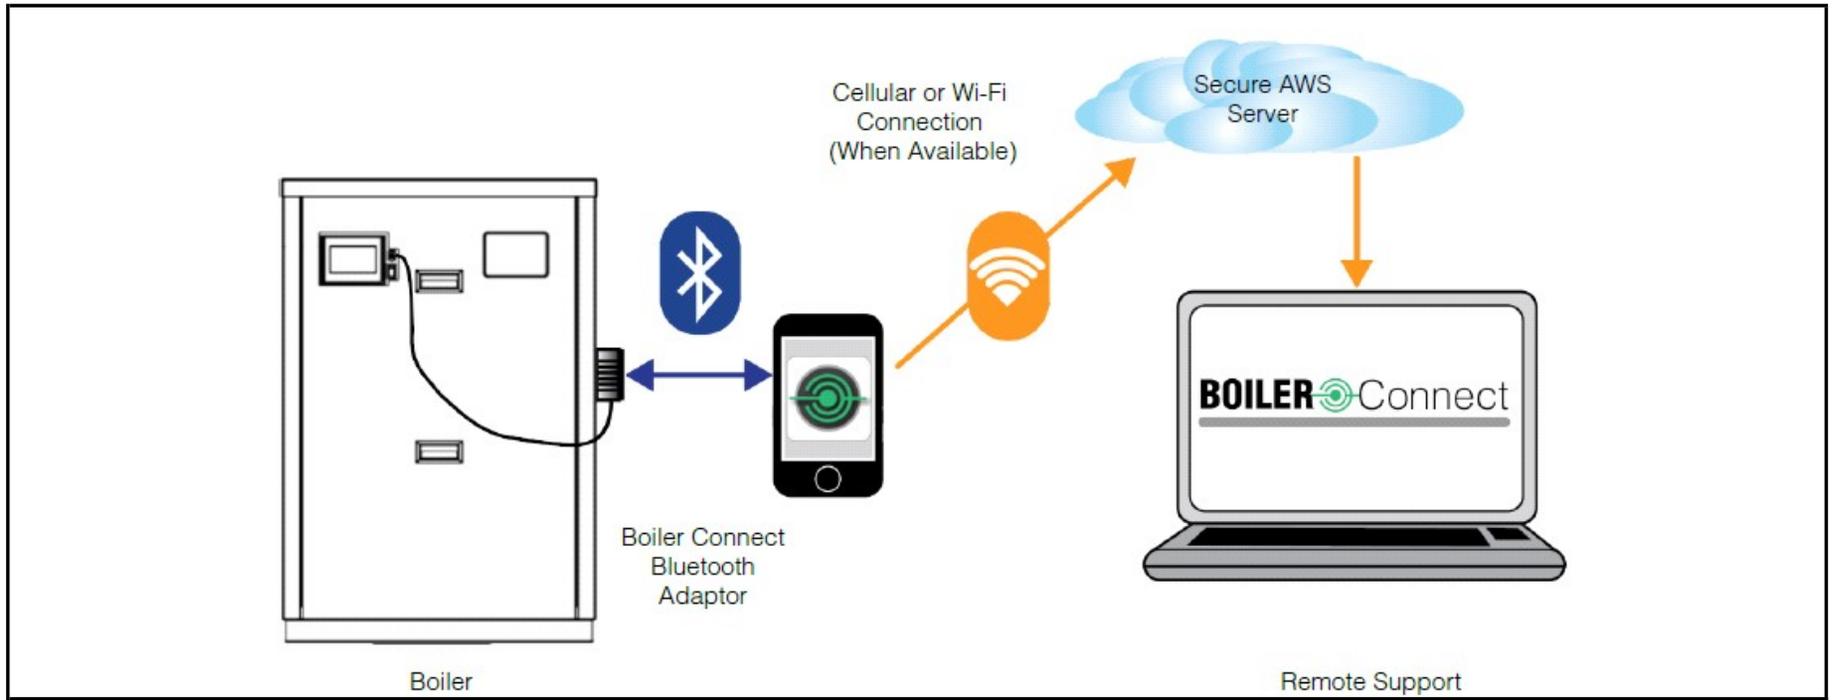

## BOILER Connect

### BOILER CONNECT FEATURES

- Bluetooth adaptor connects to the Boiler Connect App
- English or Spanish language
- Start-up, Troubleshooting Tips and Service Wizards
- Data logs, Service and Status Reports sent to the cloud
- Live Data Sharing (Cellular Service Required) with Technical Service Representative