OSFP-800GB-VR8-VDM-EC-AO

Edge-corE® Compatible TAA 800GBase-VR8 OSFP-IHS Transceiver (MMF, 850nm, MPO-16, 50m, CMIS 5.0, VDM)

Features:

- Compliant with IEEE 802.db and IEEE 802.ck
- CMIS 5.0
- Compliant with OSFP MSA
- Electrical Interface: 106.25Gbps (PAM4) x 8
- 8 Duplex Channels, Transmitters and Receivers
- Optical Interface: 106.25Gbps (PAM4) x 8
- Single 3.3V Power Supply
- Maximum Link Length of 50m on OM4 MMF
- MPO-16 APC Connector
- Maximum Power Consumption: 15W
- Case Operating Temperature: 15 to 70 Celsius
- RoHS Compliant and Lead-Free



Applications:

- Advance Monitoring Capable Transceiver
- 800GBase Ethernet

Product Description

This Edge-corE® compatible OSFP-IHS transceiver provides 800GBase-VR8 throughput up to 50m over multi-mode fiber (MMF) PAM4 using a wavelength of 850nm via an MPO-16 connector. It can operate at temperatures between 0 and 70C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Edge-corE®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) and Versatile Diagnostics Monitoring (VDM) support which allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."

TAA COMPLIANT

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Supply Voltage	Vcc	-0.5		3.6	V	
Storage Temperature	Tstg	-40		85	°C	
Relative Humidity	RH	5		85	%	
Damage Threshold Per Lane		5			dBm	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Electrical Signal Rate Per Lane		53.125 ± 100ppm			GBd	
Optical Signal Rate Per Lane		53.125 ± 100ppm			GBd	
Supply Voltage	Vcc	3.135	3.3	3.465	V	
Operating Case Temperature	Tc	15		70	°C	
Power Consumption	PC			15	W	
Link Distance with OM4	D	0.5		50	m	

Optical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter							
Signaling Rate Per Lane			53.125 ± 100ppm			GBd	
Modulation Format			PAM4				
Lane Wavelength (Range)		λ	840		948	nm	
RMS Spectral Width					0.65	nm	1
Average Launch Power Per Lane		P	-4.6		4	dBm	2
OMAouter Per Lane	**For Max. (TECQ,TDECQ) ≤ 1.8dB**		-2.6		3.5	dBm	
	For 1.8dB < Max. (TECQ,TDECQ) ≤ 4.4dB		-4.4+ Max. (TECQ,TDECQ)				2, 3
Transmitter and Dispersion Eye Closure for PAM4 (TDECQ) Per Lane					4.4	dB	
Transmitter Eye Closure for PAM4 (TECQ) Per Lane					4.4	dB	
Extinction Ratio Per Lane		ER	2.5			dB	
Average Launch Power of Off Transmitter Per Lane		Poff			-30	dBm	
$RIN_{21}OMA$ Per Lane		RIN			-132	dB/Hz	
Optical Return Loss Tolerance					14	dB	
Encircled Flux			≥86% at 19μm ≤30% at 4.5μm				4
Receiver							

Signaling Rate Per Lane		53.125 ± 100ppm			GBd	
Modulation Format		PAM4				
Lane Wavelength (Range)	λ	840		948	nm	
Damage Threshold Per Lane		5			dBm	5
Average Receive Power Per Lane		-6.3		4	dBm	6
Receive Power (OMAouter) Per Lane	R_{OMA}			3.5	dBm	
Receiver Reflectance				-15	dB	
Receiver Sensitivity (OMAouter) Per Lane	SEN	Max. (-4.4, TECQ-6.2)			dBm	7
LOS Assert		-15			dBm	
LOS De-Assert				-6.6	dBm	
LOS Hysteresis		0.5			dB	
Conditions of Stressed Receiver Sensitivity Test (Note 8)						
Stressed Eye Closure for PAM4 (SECQ) Per Lane Under Test		4.4			dB	
OMAouter of Each Aggressor Lane		3.5			dBm	

Notes:

1. RMS spectral width is the standard deviation of the spectrum.
2. Based on stressed receiver sensitivity of -2dBm and may increase by up to 0.4dB based on the choice of stressed receiver sensitivity.
3. Even if the TDECQ<1.4dB, the OMA (minimum) must exceed this value.
4. If measured into type A1a.2 or type A1a.3, or A1a.4, 50µm fiber, in accordance with IEC 61280-1-4.
5. The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level on one lane. The receiver does not have to operate correctly at this input power.
6. Average receive power, per lane (minimum) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.
7. Receiver sensitivity is informative and is defined for a transmitter with a value of TECQ up to 4.4dB.
8. These test conditions are for measuring stressed receiver sensitivity. They are not characteristics of the receiver.

Digital Diagnostic Monitor Accuracy


Parameter	Accuracy	Unit	Notes
Measured Transceiver Temperature	±3	°C	
Measured Transceiver Supply Voltage	±3	%	
Measured Tx Bias Current	±10	%	
Measured Tx Output Power	±3	dB	
Measured Rx Received Average Optical Power	±3	dB	

Pin Descriptions

Pin	Symbol	Logic	Name/Description	Notes
1	GND		Module Ground.	
2	TX2p	CML-I	Transmitter Non-Inverted Data.	
3	TX2n	CML-I	Transmitter Inverted Data.	
4	GND		Module Ground.	
5	TX4p	CML-I	Transmitter Non-Inverted Data.	
6	TX4n	CML-I	Transmitter Inverted Data.	
7	GND		Module Ground.	
8	TX6p	CML-I	Transmitter Non-Inverted Data.	
9	TX6n	CML-I	Transmitter Inverted Data.	
10	GND		Module Ground.	
11	TX8p	CML-I	Transmitter Non-Inverted Data.	
12	TX8n	CML-I	Transmitter Inverted Data.	
13	GND		Module Ground.	
14	SCL	LVCMOS-I/O	2-Wire Serial Interface Clock.	
15	Vcc		+3.3V Power Supply.	
16	Vcc		+3.3V Power Supply.	
17	LPWn/PRSn	Multi-Level	Low-Power Mode/Module Present.	
18	GND		Module Ground.	
19	RX7n	CML-O	Receiver Inverted Data.	
20	RX7p	CML-O	Receiver Non-Inverted Data.	
21	GND		Module Ground.	
22	RX5n	CML-O	Receiver Inverted Data.	
23	RX5p	CML-O	Receiver Non-Inverted Data.	
24	GND		Module Ground.	
25	RX3n	CML-O	Receiver Inverted Data.	
26	RX3p	CML-O	Receiver Non-Inverted Data.	
27	GND		Module Ground.	
28	RX1n	CML-O	Receiver Inverted Data.	
29	RX1p		Receiver Non-Inverted Data.	
30	GND		Module Ground.	
31	GND		Module Ground.	
32	RX2p	CML-O	Receiver Non-Inverted Data.	
33	RX2n	CML-O	Receiver Inverted Data.	
34	GND		Module Ground.	
35	RX4p	CML-O	Receiver Non-Inverted Data.	


36	RX4n	CML-O	Receiver Inverted Data.	
37	GND		Module Ground.	
38	RX6p	CML-O	Receiver Non-Inverted Data.	
39	RX6n	CML-O	Receiver Inverted Data.	
40	GND		Module Ground.	
41	RX8p	CML-O	Receiver Non-Inverted Data.	
42	RX8n	CML-O	Receiver Inverted Data.	
43	GND		Module Ground.	
44	INT/RSTn	Multi-Level	Module Interrupt/Module Reset.	
45	Vcc		+3.3V Power Supply.	
46	Vcc		+3.3V Power Supply.	
47	SDA	LVCMOS-I/O	2-Wire Serial Interface Data.	
48	GND		Module Ground.	
49	TX7n	CML-I	Transmitter Inverted Data.	
50	TX7p	CML-I	Transmitter Non-Inverted Data.	
51	GND		Module Ground.	
52	TX5n	CML-I	Transmitter Inverted Data.	
53	TX5p	CML-I	Transmitter Non-Inverted Data.	
54	GND		Module Ground.	
55	TX3n	CML-I	Transmitter Inverted Data.	
56	TX3p	CML-I	Transmitter Non-Inverted Data.	
57	GND		Module Ground.	
58	TX1n	CML-I	Transmitter Inverted Data.	
59	TX1p	CML-I	Transmitter Non-Inverted Data.	
60	GND		Module Ground.	

Host Board Connector

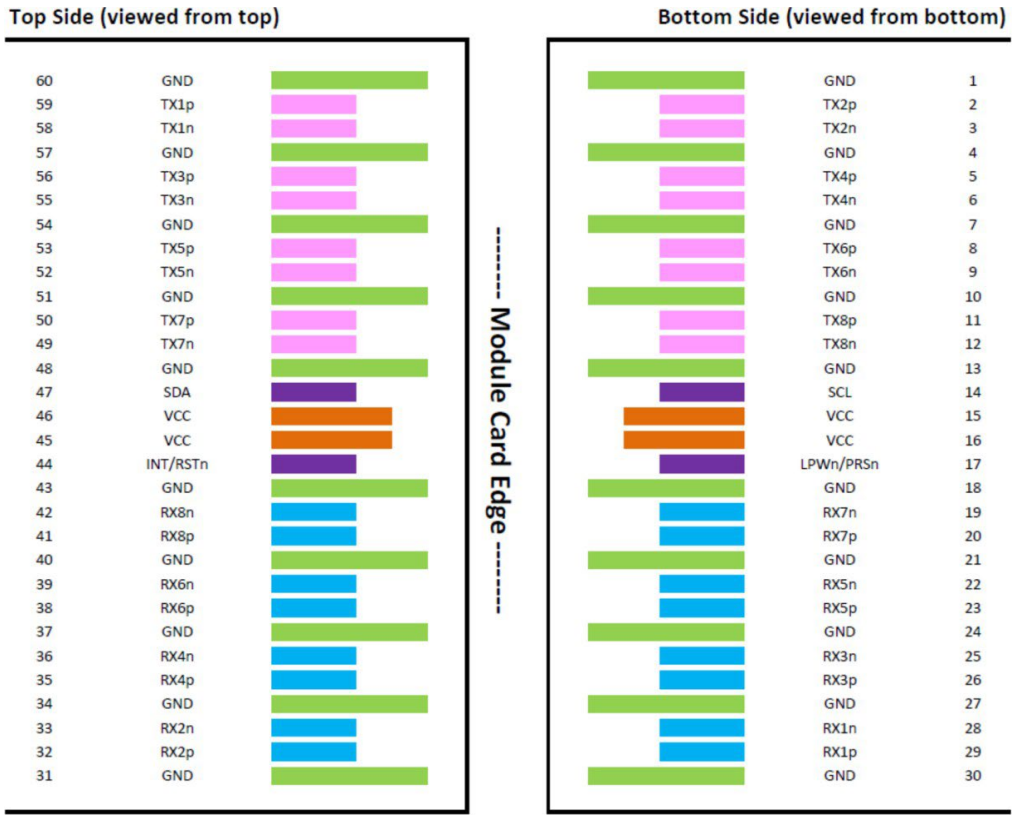

Name	Direction	Description
TX[8:1]p	Input	Transmit differential pairs from host to module.
TX[8:1]n	Input	
RX[8:1]p	Output	Receive differential pairs from host to module.
RX[8:1]n	Output	
SCL	Bi-Directional	2-wire serial clock signal. Requires pull-up resistor to 3.3V on host.
SDA	Bi-Directional	2-wire serial data signal. Requires pull-up resistor to 3.3V on host.
LPWn/PRSn	Bi-Directional	Multi-level signal for low power control from host to module and module presence indication from module to host. This signal requires the circuit as described in the OSFP Specification.
INT/RSTn	Bi-Directional	Multi-level signal for interrupt request from module to host and reset control from host to module. This signal requires the circuit as described in OSFP Specification.
VCC	Power	3.3V power for module.
GND	Ground	Module Ground. Logic and power return path.

Mechanical Specifications

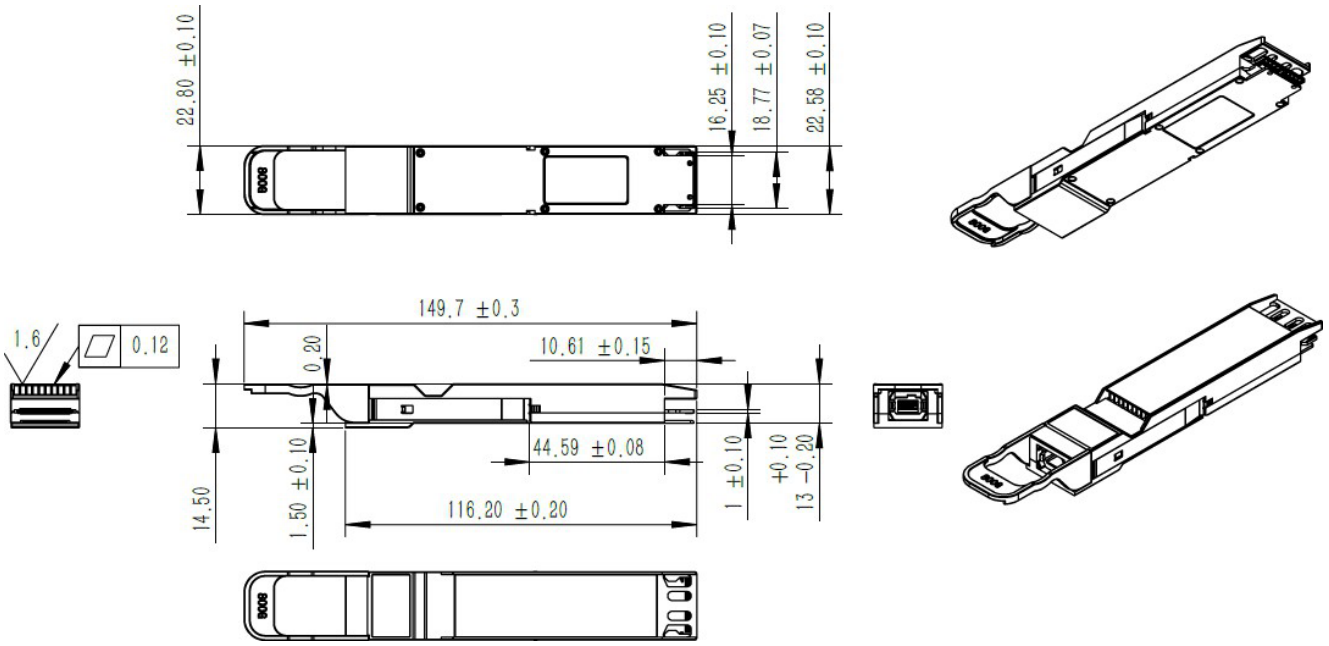

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is ingrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications ranging from NEBS Level 3 to ISO 9001:2015 with every new development while maintaining the signature reliability of its products.



U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salesemea@addonnetworks.com

Telephone: +44 1285 842070