




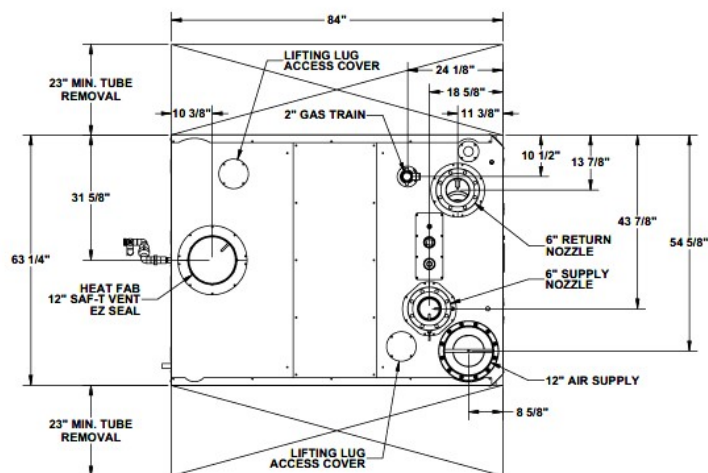


TOP VIEW

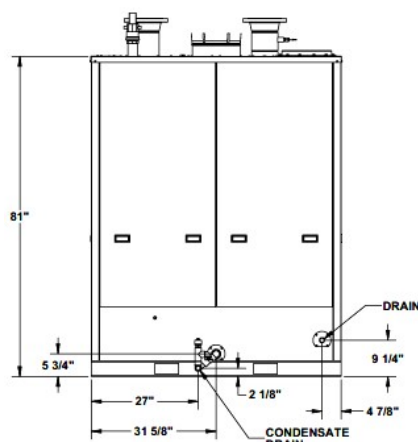

REAR VIEW

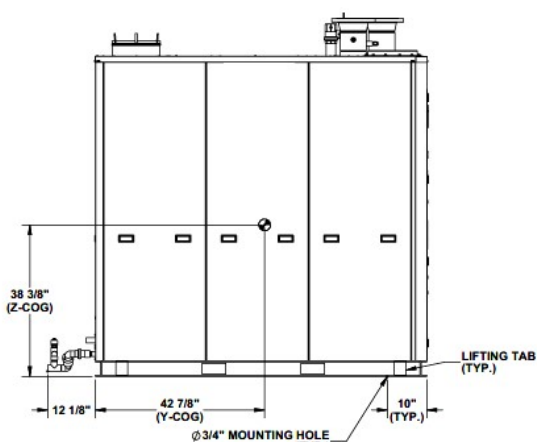

LEFT SIDE VIEW

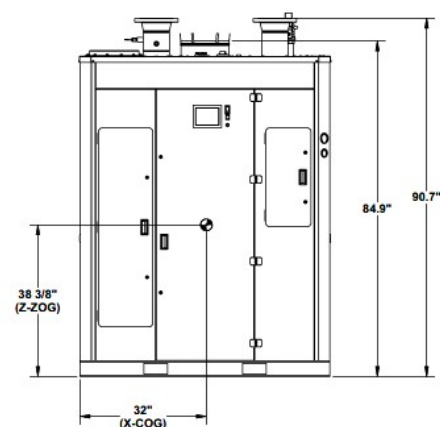

FRONT VIEW



Boiler SUBMITTAL DATA SHEET



RATINGS AND CAPACITIES

Input - Low fire:	875,000	BTU/HR
Input - High Fire:	3,500,000	BTU/HR
Output - High Fire:	3,290,000	BTU/HR
Boiler Horsepower:	98	BHP
Thermal Efficiency %:	95	
Combustion Efficiency %:	94	
Water Vol. (gal):	56	Gallons
Fuel:	Natural Gas ONLY	
Firing Rate:	Full Modulation	
Burner Turndown:	4:1	
Low NOx Emissions:	Capable, Consult Factory	
Inlet Gas Pressure (NG):	7" (Min.) / 14" (Max.)	
Minimum Flow Rate:*	102 gpm	1.05 Δ P (ft) 65° Δ T High Fire
Maximum Flow Rate (20°F Δ T):*	333 gpm	11.33 Δ P (ft) 20° Δ T High Fire
Note: Not for sizing constant volume pump. 3500-6000 models will force modulation at delta of 69°F, recycle at 75°F, and lock out at 80°F.		
Approx. Shipping Weight (lb):	4,500	lbs.

ASME Section IV (Max 160 PSIG / 210°F)

Setpoint range is 60-185°F

Adjustable, manual reset high limit setting of ≤ 200°F.

ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)

ETL Certified to ANSI Z21.13 / CSA 4.9

ETL Certified to UL 795 / CSA 3.1



DIMENSIONS / CONNECTIONS

Height:	81"	(Note 1)
Width:	64"	(Note 2)
Length:	84"	(Note 3)
Water Outlet Pipe:	6" Flange	
Water Inlet Pipe:	6" Flange	
Vent Connection:	12"	
Air Intake Connection:	12"	
Condensate Drain (PVC):	1"	
Drain Line Connection:	1"	
Gas Inlet Connection (FPT):	2"	

FLOWS AND PRESSURE DROPS*

Delta T	Flow (GPM)	Head Loss (ft)
*65°F Δ T (Min. Flow)	102	1.1
60°F Δ T	111	1.2
50°F Δ T	133	1.5
45°F Δ T	148	2.1
40°F Δ T	166	2.6
35°F Δ T	190	3.3
30°F Δ T	222	4.6
25°F Δ T	266	7.3
*20°F Δ T (Max. Flow)	333	11.3

Electrical Requirements: (Appliance Only)

Model	Voltage	FLA	CCA	MHP	MA
1000	120/1/60	6.6 FLA	2.6 CCA	0.46 MHP	4 MA
1500	120/1/60	13.1 FLA	2.6 CCA	1.1 MHP	10.5 MA
	208-240/1/60	6.9 FLA	2.6 CCA	1.1 MHP	4.3 MA
2000-3000	120/1/60	15.6 FLA	2.6 CCA	1.5 MHP	13 MA
	208-240/1/60	8.3 FLA	2.6 CCA	1.5 MHP	5.7 MA
	208-240/3/60	9.5 FLA	2.6 CCA	3 MHP	6.9 MA
	480/3/60	5.25 FLA	1.25 CCA	3.2 MHP	4 MA
3500-4000	208-240/3/60	10.5 FLA	2.6 CCA	3 MHP	6.9 MA
	480/3/60	5.25 FLA	1.25 CCA	3.2 MHP	4 MA
4500-6000	208-240/3/60	26.6 FLA	2.6 CCA	10.7 MHP	24 MA
	480/3/60	14.25 FLA	1.25 CCA	10.7 MHP	13 MA

NOTES:

1. Height dimension is from floor to top of jacket.
2. Length is from jacket front to jacket rear.
3. Dimensions shown are for reference only
4. Refer to manual for gas supply piping charts



Boiler SUBMITTAL DATA SHEET



STANDARD EQUIPMENT

PRESSURE VESSEL DESIGN

Stainless Steel Mesh Pre-Mix Burner

ASME Stainless Steel Heat Exchanger

MAWP 160 PSIG & Max Temp 210°F

Setpoint range is 60-185°F

Adjustable, manual reset high limit setting of ≤ 200°F.

ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)

Ten Year Pressure Vessel Warranty; Lifetime Thermal Shock Warranty

COMBUSTION DESIGN

ASME Stainless Steel Heat Exchanger Modulating Gas Valve

Stainless Steel Mesh Pre-Mix Burner Supervised Pilot / UV Scanner

Variable Speed Combustion Blower 7" (Min.) / 14" (Max.)

Full Modulation, 4:1 Turndown Blocked Vent Switch

Natural gas only

Blower Motor (Voltage Options Below)

High/Low gas pressure switches, manual reset

Direct Spark Ignition System with UV Scanner

VENTING

Category IV Individual Venting

Category II Common Venting with Engineered Vent System

Polypropylene & Stainless Steel Acceptable *Material

Ducted or Room Combustion Air Intake

BOILER EQUIPMENT

Siemens LMV3 Burner Management & Parallel

Positioning Fuel to Air System w/ (9)

Programmable Points

High Limit Temp Control, Manual Reset

Low water cutoff, manual reset

Supply & Return Water Temperature Sensors

ASME Relief Valve: (Available: 30, 50, 60, 75, 100, 125, or 150 PSIG)

Water Flow Switch

Condensate Trap

Blocked Condensate Switch

Pressure & Temperature Gauge

Flue Gas Temperature Sensor

ELECTRICAL DESIGN

Model 1000:

120/1/60

Model 1500:

120/1/60

208-240/1/60

Models 2000-3000:

120/1/60

208-240/1/60

208-240/3/60

480/3/60

Models 3500-4000:

208-240/3/60

480/3/60

Models 4500-6000

208-240/3/60

480/3/60

*Flue system material shall be capable of continuous operation at 230°F or higher, have the same corrosion resistance to flue gas condensation as AL29-4C and shall be certified to UL 1738 – venting system for gas-burning appliances cat II, III and IV.



Boiler SUBMITTAL DATA SHEET



OPTIONAL EQUIPMENT

- ☐ Hydronic Kit (Boiler Circulation Pump selected for 30° Δ T with Primary / Secondary Piping, Pump Flange Kit and Condensate Neutralizer)
- ☐ External High Limit Temperature Control, Adjustable Manual Reset, 200°F
- ☐ Condensate Neutralizer
- ☐ Supply Header Temperature Sensor [10K NTC]: ☐ Direct Immersion ☐ Well Immersion (with Well)
- ☐ Outdoor Air Temperature Sensor (Wired) [10K NTC]
- ☐ Alarm Buzzer with Silencing Switch
- ☐ Motorized Isolation Valves for Variable Primary Piping (Quick reacting, drive open / drive closed)
- ☐ Universal Communications Gateway (BACnet, Metasys, Modbus or Lonworks)
- ☐ Tube Replacement Tools
- ☐ Knockdown Configuration: KD-1 - Ships with jacket, flue collector/heat exchanger and base in separate cartons. (Sizes 1500-6000)
- ☐ Knockdown Configuration: KD-2 - Ships with jacket, flue collector, tubes, burner, stack, lower tube rail, and base in separate cartons. (Sizes 1500-6000)

EXTENDED WARRANTY

- ☐ 3-Year Parts ☐ 5-Year Parts ☐ 10-Year Parts ☐ 5-Year Parts/Labor ☐ 10-Year Parts/Labor



Boiler SUBMITTAL DATA SHEET



CONCERT CONTROL FEATURES



Dashboard - Color Touchscreen Display, 4"

- Intuitive Icon Navigation
- "Quick" Setup Menus
- *Real Time BTU/H Display

Three (3) Pump Control

- Boiler Pump With On/Off or Variable Speed Control
- Domestic Hot Water (DHW) Pump
- System Pump
- Alternative Control to Combustion
 - Air Damper or Standby Loss Damper
- Pump Overrun for Heat Dissipation
- Pump Exercise
- Pump Rotor Seizing Protection

Peer-to-Peer Boiler Communications

- Multiple Size Boiler Sequencing Up to 8 Units
- *Two (2) Boiler Start/Stop Trigger
- Lead Boiler Automatic Rotation

Energy Management System (EMS) Interface

- *Firing Rate and Water Temperature Based
 - Algorithms for Multiple Boilers; loss of EMS signal defaults to local boiler settings
- 4-20mA dc & 0-10 Vdc Input/Output
- ModBus Input/Output (BACnet or LonWorks Optional Gateway)
- Simultaneous Interface with Peer-to-Peer

USB Data Port Transfer

- Upload Settings Between Boilers
- Download Parameters for Troubleshooting
- Import Data into .CRV Formatted Files for Performance Analysis

Energy Efficiency Enhancer

- Anti-Cycling Technology
- Adjustable boiler base load common rate
- Outdoor Air Temperature Reset Curve
- Warm Weather Shutdown
- Boost Temperature & Time
- Ramp Delay
- OverTemperature Safeguarding

Self-Guiding Diagnostics

- Self-Guiding Diagnostics
- Identifies Fault
- Describes Possible Problems
- Provides Corrective Actions

Unmatched Archives

- Historical Trends Collects Up to 4 months Data
- Event History Up to 3000 Alarms, Lockouts and Cycle & Run Times
- Alarm Limit String Faults, Holds, Lockouts and Others
- Cycle & Run Time Boilers & Pumps
- Resettable (Lockouts/Alarms/Cycles & Run Time)

Domestic Hot Water Priority

- DHW Tank Piped With Priority in the Boiler Loop
- DHW Tank Piped as a Zone in the System With the Pumps Controlled by the Concert Control
- DHW Modulation Limiting
- Status Screens
- Sensor Monitoring and Control

Other Features

- Factory Default Settings
 - Three Level Password Security
 - Frost Protection
- Contractor Contacts (Up to 3)
- Low Water Flow Control & Identification
- Proportional Integral Derivative (PID) Parameter for Central HEAT, DHS, Sequencer and Fan

* Unique to Concert