

100-04063-OPC

Calix® 100-04063 Compatible TAA 1000Base-BX 2-Channel SFP Transceiver (SMF, 1490nmTx/1310nmRx, 40km, LC, DOM, -40 to 85C)

Features

- INF-8074 and SFF-8472 Compliance
- Simplex LC Connector
- Single-mode Fiber
- Industrial Temperature -40 to 85 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



Applications:

- 1000Base-BX Ethernet
- 1x Fibre Channel
- Access (FTTx) and Enterprise

Product Description

This Calix® 100-04063 compatible SFP transceiver provides 1000Base-BX 2-Channel throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1490nmTx/1310nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It is capable of withstanding rugged environments and can operate at temperatures between -40 and 85C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Calix®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

OptioConnect's transceivers are RoHS compliant and lead-free.

Absolute Maximum Ratings

Parameter		Symbol	Min.	Typ.	Max.	Unit
Maximum Supply Voltage		V _{cc}	-0.5		3.6	V
Storage Temperature		T _S	-40		85	°C
Operating Case Temperature		T _c	-40		85	°C
Operating Relative Humidity		RH			95	%
Data Rate	FE			100		Mbps
	OC-3/STM-1			155		Mbps
	STM-4			622		Mbps
	FC			1063		Mbps
	GBE			1250		Mbps

Electrical Characteristics (TOP=25°C, V_{cc}=3.3Volts)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage		Vcc	3.15	3.3	3.45	V	
Power Supply Current		Icc			300 per channel	mA	
Power Dissipation		Pd			1.5	W	
Transmitter							
LVPECL Compatible Inputs (Differential)		Vin	400		2000	mVpp	AC coupled inputs (Note 5)
Input Impedance (Differential)		Zin	85	100	115	ohm	Rin > 100kΩ @DC
TX_FAULT	Fault		2		Vcc+0.3	V	
	Normal		0		0.5		
TX_Dis	Disable		2		Vcc+0.3	V	
	Enable		0		0.8		
Receiver							
CML Outputs (Differential)		Vout	400		800	mVpp	AC coupled outputs (Note 5)
Output impedance (Differential)		Zout	85	100	115	ohm	
RX_LOS	LOS		2		Vcc+0.3	V	
	Normal		0		0.8	V	
MOD_DEF (0:2)		VoH	2.5			V	With Serial ID
		VoL	0		0.5	V	


Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Notes
9μm Core Diameter SMF	L		40		km	
Data Rate			100~1250		Mbps	
Transmitter						
Center Wavelength	λ_c	1480	1490	1500	nm	
Spectral Width (-20dB)	$\Delta\lambda$			1	nm	
Average Output Power	P _{out}	-5		0	dBm	1
Extinction Ratio @ 1250Mbps	ER	6			dB	
Side Mode Suppression Ratio	SMSR	30			dB	
Rise/Fall Time (20%~80%)	Tr/tf			0.26	ns	
Output Optical Eye (Note 2)	Compliant with IEEE 803ah-2004					5
TX_Disable Assert Time	t _{off}			10	us	
P _{out} @TX_Disable Asserted	P _{out}			-45	dBm	
Receiver						
Center Wavelength	λ_c	1260	1310	1360	nm	
Receiver Sensitivity @1250Mbps	P _{min}			-24	dBm	4
Receiver Overload	P _{max}	-3			dBm	
Return Loss		12			dB	
Optical Path Penalty				1	dB	
LOS De-Assert @1250Mbps	LOSD			-25	dBm	
LOS Assert	LOSA	-35			dBm	
LOS Hysteresis		0.5			dB	6


Notes:

1. Output is coupled into a 9/125μm single-mode fiber.
2. Filtered measured with a PRBS 2⁷-1.
3. LVPECL logic, internally AC coupled.
4. Minimum average optical power measures at BER less than 1E-12, with a 2⁷-1 PRBS and ER=9 dB

5. Eye Pattern Mask

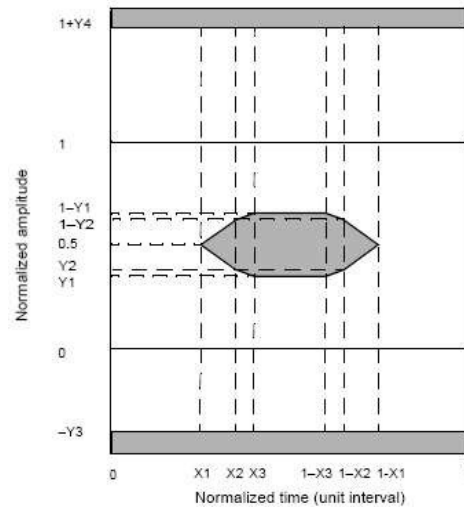

6. LOS Hysteresis

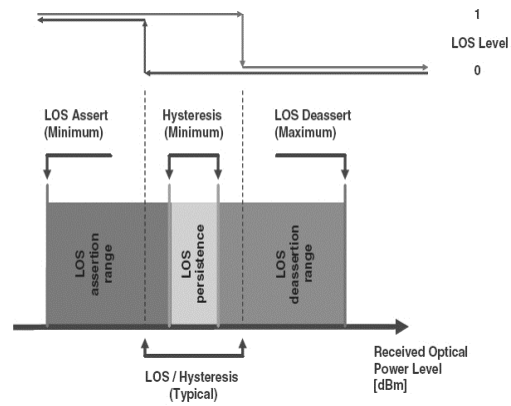

Pin Descriptions



Pin	Symbol	Channel No.	Function	Ref.
1	VeeT	Common	Transmitter Ground	Note 3
2	TX Fault	Common	Transmitter Fault Indication	Note 8
3	TX1_Disable	1	Transmitter Disable of Ch1	Note 1, module disables on high or open
4	MOD-DEF2	Common	Two-Wires Interface Data	Note 2, 2wire serial ID interface SDA
5	MOD-DEF1	Common	Two-Wires Interface Clock	Note 2, 2wire serial ID interface SCL
6	TD2-	2	Inverted Transmit Data Input of Ch2	Note 6
7	TD2+	2	Transmit Data Input of Ch2	Note 6
8	LOS1	1	Loss of Signal of CH1.	Note 7
9	RD2+	2	Received Data output of Ch2	Note 4
10	RD2-	2	Inverted Received Data output of Ch2	Note 4
11	VEE	Common	Transceiver Ground	Note 3
12	RD2-	1	Inverted received Data output of Ch1.	Note 4
13	RD2-	2	Received Data output of Ch1	Note 4
14	LOS2	2	Loss of Signal of CH2	Note 7
15	VCCR	Common	Receiver power	Note 5, 3.3V 5%
16	VCCT	Common	Transmitter Power	Note 5, 3.3V 5%
17	TX2_Disable	2	Transmitter Disable of Ch2	Note 1, Module disables on high or open
18	TD1+	1	Transmit Data Input of Ch1	Note 6
19	TD1-	1	Inverted Transmit Data Input of Ch1	Note 6
20	VEE	Common	Transceiver Ground	Note 6

Notes:


- TX_Disable1,2 are an input that us used to shut down the transmitter optical output. It is pulled up within the module with a 4.7K-10K_resistor. It's states are:
Low (0-0.8V): Transmitter on
(>0.8, <2.0V): Undefined
High (2.0-3.465V): Transmitter Disabled
Open: Transmitter Disabled
- Mod-Def 1,2. These are the module definition pins. They should be pulled up with a 4.7K-10K_resistor on the host board. The pull-up voltage shall be VccT or VccR.
Mod-Def 1 is the clock line of two wire serial interfaces for serial ID. Mod-Def 2 is the data line of two wire serial interface for serial ID.
- VEE may be internally connected within the SFO module.
- RD1, 2-/+: These are the differential receiver outputs. They are AC couples 100_ differential lines which should be terminated with 100_(differential) at the user SERDES. The AC coupling is done inside the

module and is this not required on the host board.

5. VccT, VccR are the power supplies. They are defined as 3.3V $\pm$ 5% at the SFP connector pin. Maximum supply current is 600mA@3.3V. Vcc may be internally connected within the SFP transceiver module.
6. TD1, 2-/+: These are the differential transmitter inputs. They are AC coupled, differential lines with 100_ohm differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.
7. LOS 1,2 (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K— 10K Ω resistor. Pull up voltage between 2.0V and VccT, R+0.3V. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to <0.4V.
8. TX Fault report transceiver status as following:
TX Fault is an open collector/drain output, which should be pulled up with a 4.7K–10K_ resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicated a laser fault of some kind either in Channel 1 or Channel 2. The Host shall read Channel1/2: A2H/AAH: 110 for details: TX Fault from channel 1 if bit 2 is set in [A2H:110]; TX Fault from channel 2 if bit 2 is set in [B2H: 110]. Low indicated normal operation. In the low state, the output will be pulled to < 0.8V.

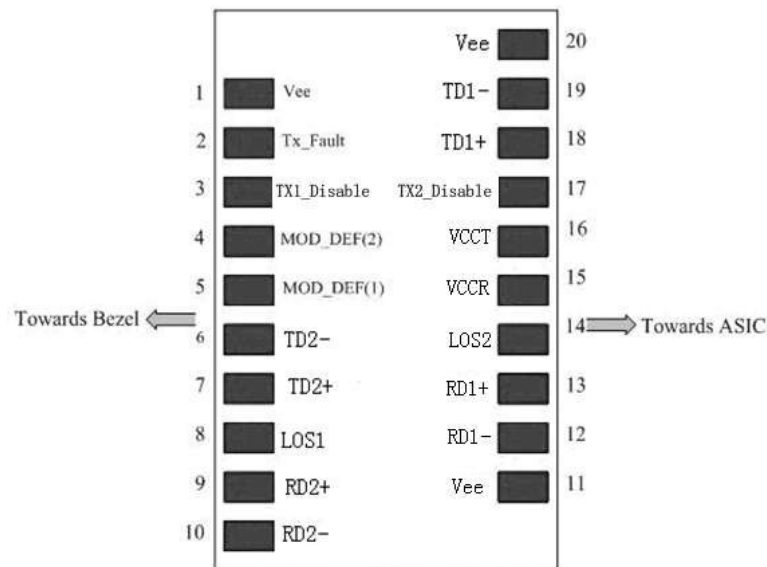

Recommended Circuit Schematic

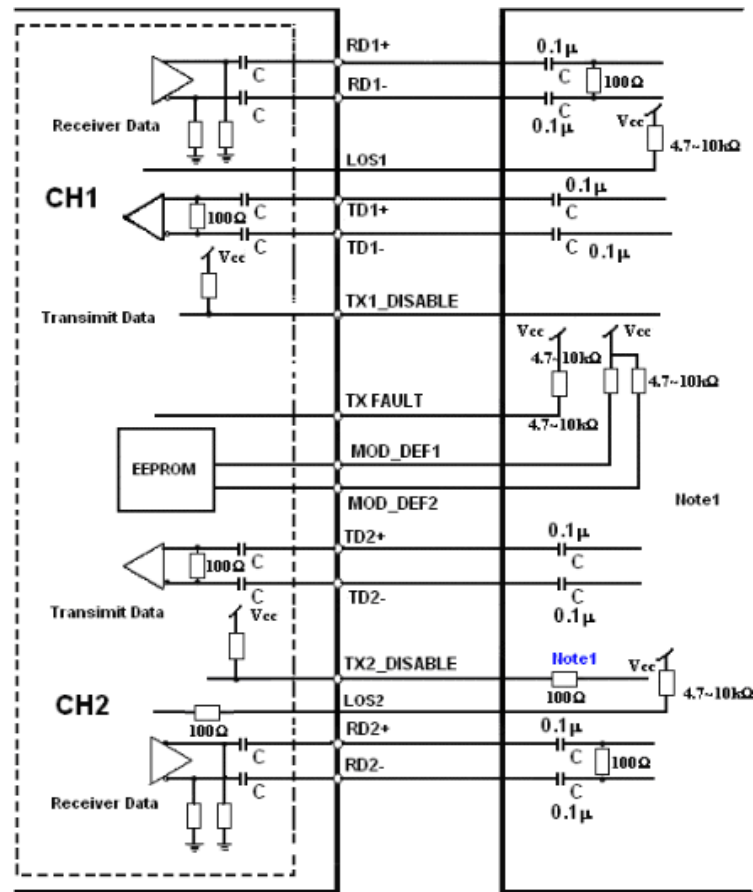


Laser Emission



Mechanical Specifications

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

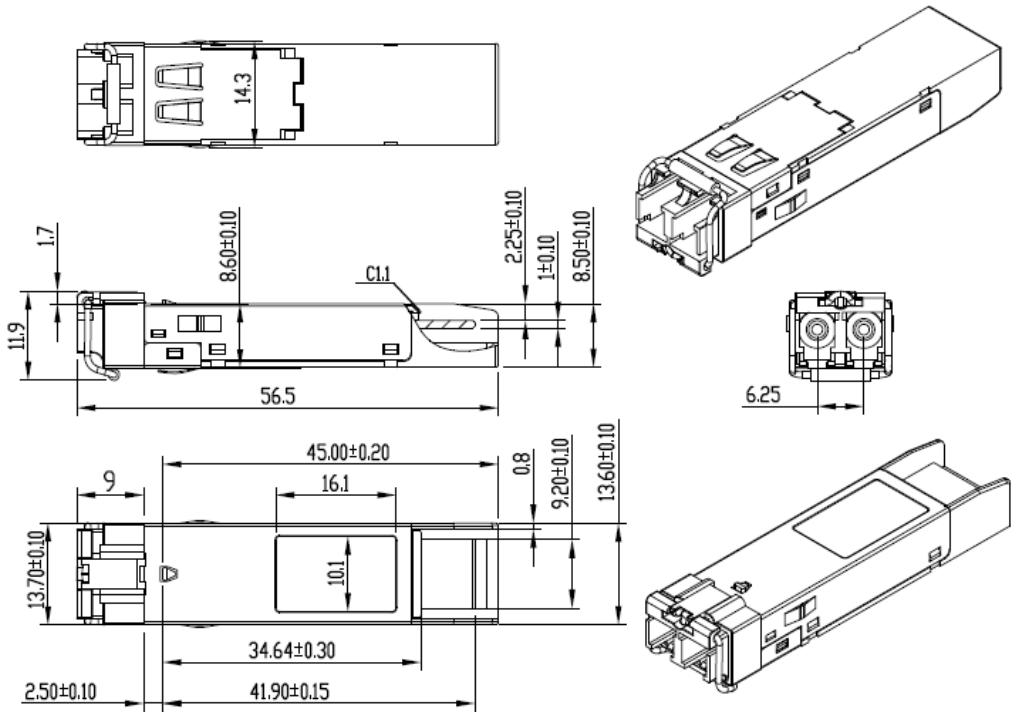

EEPROM Information

EEPROM memory map specific data field description is as below:

2 wire address 1010000X	2 wire address 1010001X	2 wire address 10110000X	2 wire address 10110001X																																												
<table><tr><td>0</td><td>Serial ID Defined by SFP MSA (96 bytes)</td></tr><tr><td>95</td><td>Vendor Specific (32 bytes)</td></tr><tr><td>127</td><td>Reserved (128 bytes)</td></tr><tr><td>255</td><td></td></tr></table>	0	Serial ID Defined by SFP MSA (96 bytes)	95	Vendor Specific (32 bytes)	127	Reserved (128 bytes)	255		<table><tr><td>0</td><td>Alarm and Warning Thresholds (56 bytes)</td></tr><tr><td>55</td><td>Cal Constants (40 bytes)</td></tr><tr><td>95</td><td>Real Time Diagnostic Interface (24 bytes)</td></tr><tr><td>119</td><td>Vendor Specific (8 ytes)</td></tr><tr><td>127</td><td>User Writable EEPROM (120 bytes)</td></tr><tr><td>247</td><td>Vendor Specific (8 ytes)</td></tr><tr><td>255</td><td></td></tr></table>	0	Alarm and Warning Thresholds (56 bytes)	55	Cal Constants (40 bytes)	95	Real Time Diagnostic Interface (24 bytes)	119	Vendor Specific (8 ytes)	127	User Writable EEPROM (120 bytes)	247	Vendor Specific (8 ytes)	255		<table><tr><td>0</td><td>Serial ID Defined by SFP MSA (96 bytes)</td></tr><tr><td>95</td><td>Vendor Specific (32 bytes)</td></tr><tr><td>127</td><td>Reserved (128 bytes)</td></tr><tr><td>255</td><td></td></tr></table>	0	Serial ID Defined by SFP MSA (96 bytes)	95	Vendor Specific (32 bytes)	127	Reserved (128 bytes)	255		<table><tr><td>0</td><td>Alarm and Warning Thresholds (56 bytes)</td></tr><tr><td>55</td><td>Cal Constants (40 bytes)</td></tr><tr><td>95</td><td>Real Time Diagnostic Interface (24 bytes)</td></tr><tr><td>119</td><td>Vendor Specific (8 ytes)</td></tr><tr><td>127</td><td>User Writable EEPROM (120 bytes)</td></tr><tr><td>247</td><td>Vendor Specific (8 ytes)</td></tr><tr><td>255</td><td></td></tr></table>	0	Alarm and Warning Thresholds (56 bytes)	55	Cal Constants (40 bytes)	95	Real Time Diagnostic Interface (24 bytes)	119	Vendor Specific (8 ytes)	127	User Writable EEPROM (120 bytes)	247	Vendor Specific (8 ytes)	255	
0	Serial ID Defined by SFP MSA (96 bytes)																																														
95	Vendor Specific (32 bytes)																																														
127	Reserved (128 bytes)																																														
255																																															
0	Alarm and Warning Thresholds (56 bytes)																																														
55	Cal Constants (40 bytes)																																														
95	Real Time Diagnostic Interface (24 bytes)																																														
119	Vendor Specific (8 ytes)																																														
127	User Writable EEPROM (120 bytes)																																														
247	Vendor Specific (8 ytes)																																														
255																																															
0	Serial ID Defined by SFP MSA (96 bytes)																																														
95	Vendor Specific (32 bytes)																																														
127	Reserved (128 bytes)																																														
255																																															
0	Alarm and Warning Thresholds (56 bytes)																																														
55	Cal Constants (40 bytes)																																														
95	Real Time Diagnostic Interface (24 bytes)																																														
119	Vendor Specific (8 ytes)																																														
127	User Writable EEPROM (120 bytes)																																														
247	Vendor Specific (8 ytes)																																														
255																																															
A0H (CH1)	A2H (CH1)	B0H (CH2)	B2H (CH2)																																												

OptioConnect

Innovation for the Future of High-Speed Networking

Who We Are

OptioConnect is reshaping the landscape of communication and high-speed networking through intelligent technology. With a core focus on cutting edge technology, we deliver smarter fiber optic solutions for enterprise networks, data centers, and next-gen telecom infrastructures.

What We Do

At OptioConnect, we fuse advanced engineering with intelligent automation to drive the future of networking. Our AI-integrated solutions are designed to optimize performance and streamline operations with:

- Superior Performance
- Network and traffic optimization
- Intelligent energy management
- Seamless OEM compatibility
- Scalable cost-efficiency

Smarter Networks by Design

Innovation isn't just a goal—it's our process. We embed AI and machine learning across our R&D and product lines, enabling adaptive performance, automated tuning, and faster deployment cycles. The result? Networks that don't just work—they learn, evolve, and outperform.

Our Team

Our engineers, data scientists, and network architects bring decades of experience and a future-focused mindset. We provide hands-on support with intelligent insights that turn complex challenges into simple solutions.

Our Mission

To deliver AI-enhanced connectivity that reduces cost, increases speed, and maximizes efficiency—empowering our partners to operate at the forefront of a rapidly evolving digital world.

Let's Connect

Discover how OptioConnect's intelligent infrastructure solutions can power your network's next leap forward.

www.optioconnect.com | info@optioconnect.com

