


DEK-CAP™


STANDING SEAM ROOF END CAP FLASHING

The only universal end cap flashing!

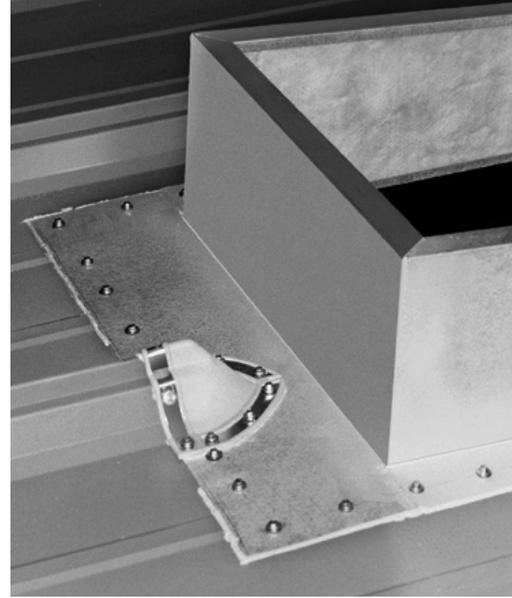

PRODUCT FEATURES

- Universal design allows use on left and right handed seams.
- Flexible, corrosion resistant aluminum base conforms to the majority of standing seam roof panels.
- Pre-formed panel profile shape is designed to reduce installation time.
- Fastening locations are clearly indicated for accurate installation.
- Dual underside ridges provide maximum sealing protection.
- Thermal elastomer material provides excellent resistance to ozone, ultra-violet light and extreme temperatures.
- Thermal elastomer has a continuous temperature of -40°F to +250°F.
- Expansion notch provides added installation flexibility.
- Interior panel stop ensures correct installation position.

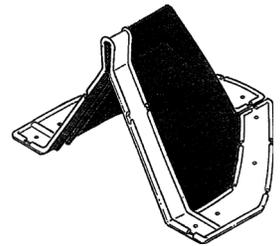

SELECTOR GUIDE


PART NO.	DESCRIPTION	BOX QTY	APPLICATIONS
4146910	Dek-Cap	10	Metal Curbs, Skylights, Ridge Applications, Jobsite Retrofit

PERFORMANCE DATA

ASTM METHOD	TEST DESCRIPTION	SPECIFICATION	TEST RESULTS	
D412	Tensile Strength (min. psi rating)	1450 psi min.	1500 psi	
D412	Ultimate Elongation (%)	350 min.	450	
D1171	Resistance to Ozone– min. rating	100 (no cracks)	Passed	
D673	Heat Aging – 70 hours at 212°F	– Change in Hardness (points)	± 15 max.	+3
		– Change in Tensile Strength (%)	± 30 max.	+2
		– Change in Elongation (%)	± 50 max.	-3
D2137	Low Temperature Brittleness– 3 mins. at -40°F	Non-brittle	Passed	
D624	Tear Resistance Die C (min.) per inch of width min.	125 lbs. per inch of width	Passed	

INSTALLATION GUIDELINES

- 1 Blend top so that both sides are parallel to metal roof.
- 2 Press Dek-Cap edges into contours of panel configuration.
- 3 Remove and apply sealant on underside of flexible aluminum edging.
- 4 Slide Dek-Cap flashing over panel profile.
- 5 Follow indicated fastening pattern to attach Dek-Cap to surface with Buildex Scots® self-drilling fasteners.
- 6 Apply additional sealant around base if desired.

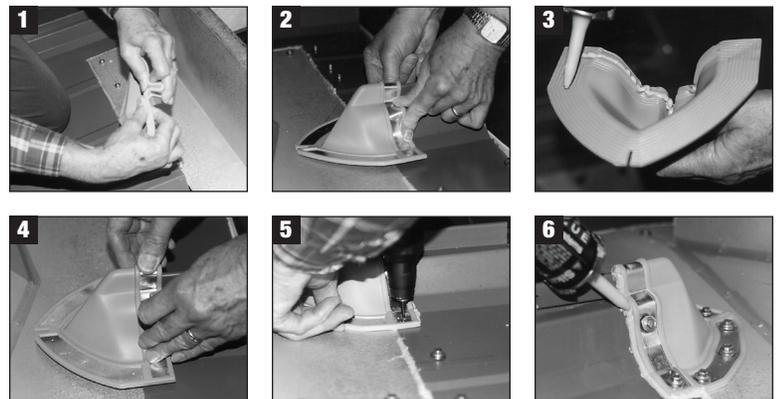

Recommended Sealant to use: Polyurethane Sealant

APPLICATIONS

