


PXN12c Multipin

PRODUCT FEATURES

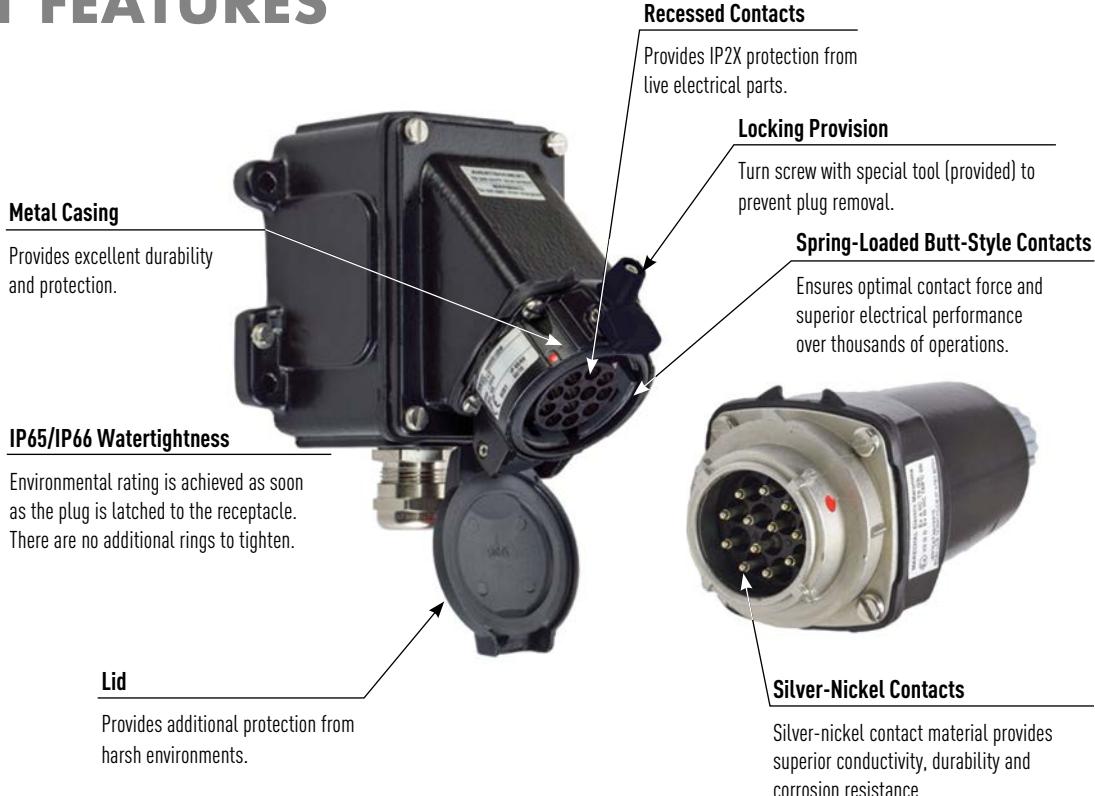

Hazardous Location Listings

ATEX
Ex e IIC Gb Ex tb IIIC Db
Suitable for Zone 1 & 2 (gas) 21 & 22 (dust)
-40°C ≤ Ta ≤ +55°C T5 T69°C
Ex ia or ib IIC T6 Gb
IECEx LCIE 14.0041X/LCIE 07 ATEX 6070X

NOM listing available. Contact Engineering for more information.

Highlighted Feature

- **Crimped Contacts**

PXN12c devices now feature contacts that can be crimped or soldered. Each device is supplied with 13 contacts so that the product can be set up to suit application needs.

Simple Assembly and Disassembly

DSN37c shown



Assembly

To insert contacts when they have been wired is simple. Push wired contact into rear of insulator until it stops to complete the installation.



Disassembly

To remove, use the tool provided. Push tool from front onto contact until tool stops. Contact is then released at rear of insulator.

HAZARDOUS LOCATION

! Devices rated for hazardous locations are not returnable.

Connector (female receptacle with handle)



Receptacle/ Angle (female)

or



Receptacle/ Angle/Box (female)

or



VOLTAGE	POLARITY	CABLE RANGE	PART # METAL	PART # METAL	PART # METAL
220 V	11P+G	.350-.630"	06A300125M	06A7001	06A000125M
220 V	11P+G	.470-.820"	06A3001	06A7001	06A0001

For international configurations (IEC/CE) visit meltric.com/international-catalog or contact Customer Service at 800-433-7642.

Plug (male inlet w/handle)



Inlet/Angle (male)

or



Inlet/ Angle/Box (male)

or



VOLTAGE	POLARITY	CABLE RANGE	PART # METAL	PART # METAL	PART # METAL
220 V	11P+G	.350-.630"	06A100125M	06A9001	06A600125M
220 V	11P+G	.470-.820"	06A1001	06A9001	06A6001

For international configurations (IEC/CE) visit meltric.com/international-catalog or contact Customer Service at 800-433-7642.

ACCESSORIES

PROTECTIVE INLET/PLUG CAP



01-NA426

EUROPEAN CRIMPING TOOL



61CA500

BAG OF 13 FEMALE CONTACTS



01AA213

Includes insulation sleeves and ferrules

MULTI-CONTACT REMOVAL TOOL



61-CA593

CRIMPER TOOL (Greenlee or equal)



4CN30

BAG OF 13 MALE CONTACTS





01AA113

Includes insulation sleeves and ferrules


DIMENSIONS – Provided in Inches

Dimensions are for reference only and may change depending on accessories used. For precise dimensions contact MELTRIC Engineering.

Plug



Wall Box/Angle/Receptacle/Plug



PRODUCT	A	B	C	D	E	F	G	ØH
PXN12c	2.3	2.42	4.09	8.37	7.54	3.7	2.76	.26

SCAN
ME >>

