



314DTDRI-XX

DIRECT TESTABLE WASTE & OVERFLOW ROUGH-IN 20 GA BRASS

SPECIFICATIONS

Features a Spin-on Tie Plate, Removable Test Plugs, and a Corrugated Overflow Tube to address tub slope or core hole alignment. Trim Kit sold separately.


CERTIFICATION(S)



*The "cSAUS Meets UPC & IPC Code" mark means the product conforms to the requirements of the NPC, UPC, IPC and IRC.

PRODUCT DIMENSIONS

XX	A	B
16 (STANDARD)	16.5" [419mm]	8.25" [210mm]
20 (EXTENDED)	21.75" [552mm]	8.25" [210mm]

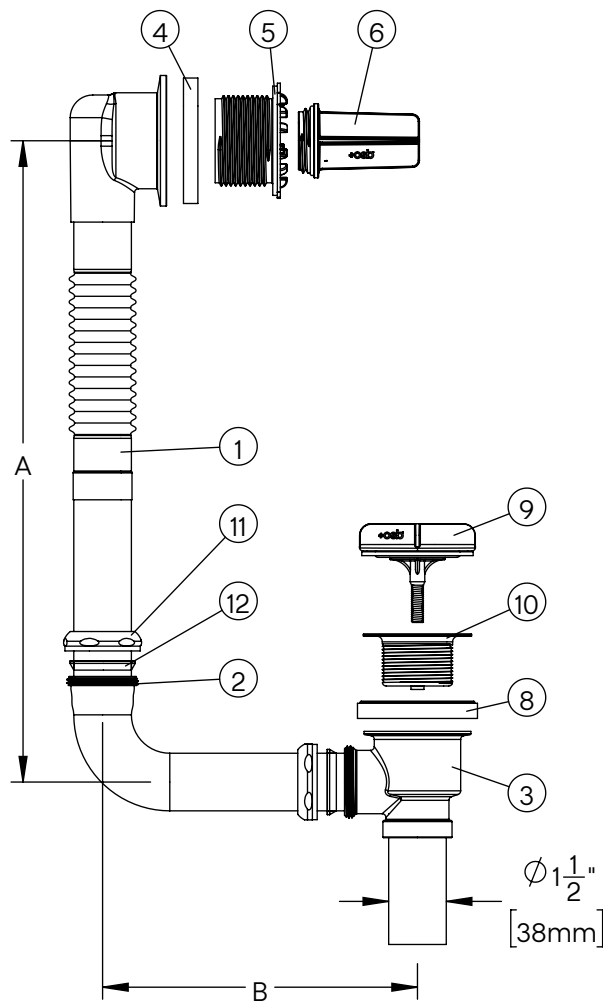

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	340B2-XXC*	BRASS O/F & CORRUGATED TUBE TESTABLE	1
2	39279-SJ	1.5" 20 GA 7" LENGTH	1
3	317-L	DIRECT DRAIN WASTE TEE	1
4	425C	W/O GASKET 3/8"	1
5	5270WTIE	WABS PLASTIC TIE PLATE	1
6	5642W-TP	TEST DRAIN CAP	1
7	3835-3.5RB	1-1/2" 20 GA T.O.E. TUBE	1
8	425	WASTE & OVERFLOW GASKET	1
9	338TEST-5/16	TEST PLUG 5/16" - 18 UNC METAL POST	1
10	338SS-L	W/O COARSE THRD SS STRAINER	1
11	550B-RB	1-1/2" BRASS NUT	2
12	405P	1-1/2" PACKING RING	2

*XX = 11, Standard | XX = 18, Extended

Oakville Stamping and Bending Ltd.

T. 905.827.0320 or toll free 1.877.314.6040 F. 905.827.6375 or toll free 1.877.827.6040.

All rights reserved. +osb™ reserves the right to change product specifications and material or discontinue models without notice.

www.osb.ca (Canada) www.osbplumbing.com (USA)

06-19-2025

