



SPECIFICATION-SUBMITTAL

5151C

SEE CONFIGURATION TABLE: X - CONFIG. Y - FINISH

PVC WASTE/OVERFLOW WITH CABLE-DRIVE® CLOSURE

JOB: _____
CONTRACTOR: _____
ARCHITECT/ENGINEER: _____

DATE: _____
QTY: _____
PO#: _____
TAG: _____

SPECIFICATION

Features a brass Euro-style control handle and Euro-style stopper. Available as a kit (less pipe), or with pipe up to a 27" tub size. Uses 1-1/2" pipe, Schedule 40.

CERTIFICATION










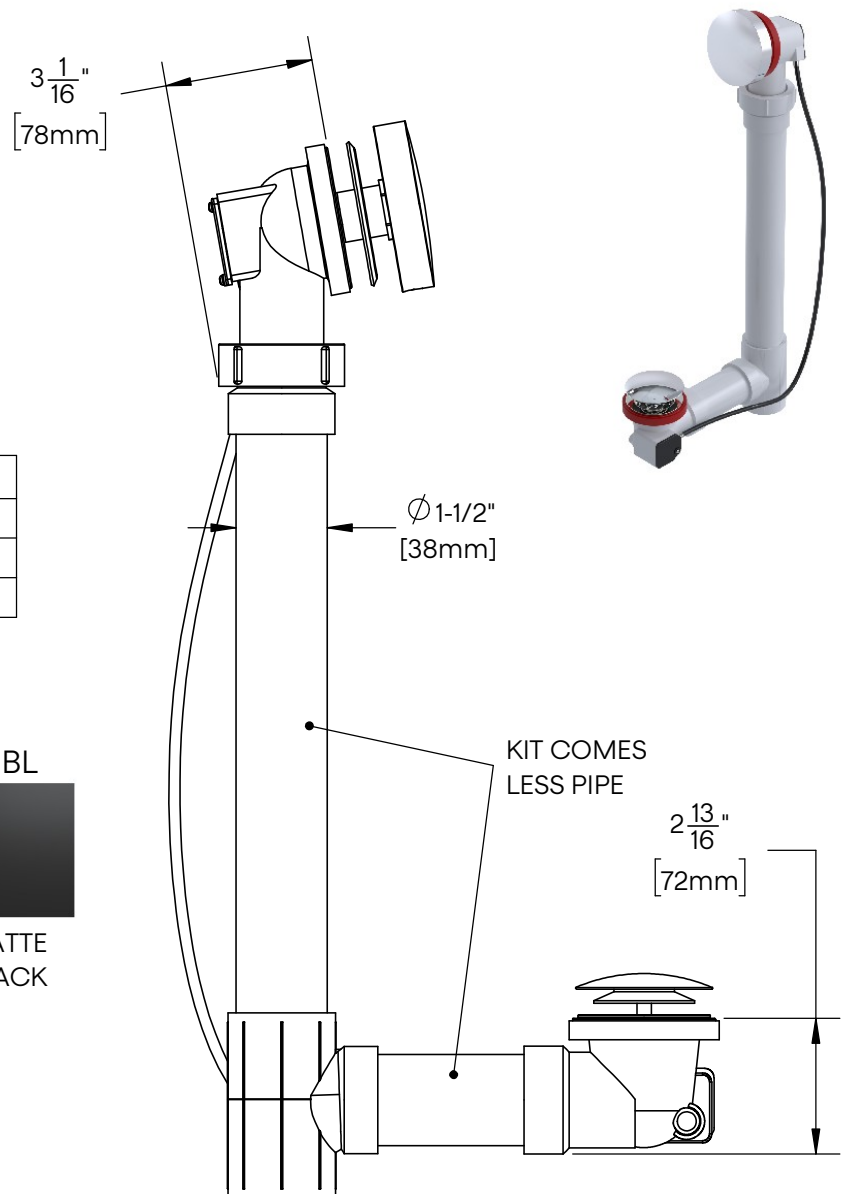
ASME A112.18.2/CSA-B125.2
The "cCSAus" Meets UPC & IPC
Code" mark means the product
conforms to the requirements of
the NPC, UPC, IPC, and IRC.

CONFIGURATION	FILL <u>X</u> - CONFIG.
FOR 20" TUB	-20
FOR 27" TUB	-27
KIT (LESS PIPE)	K-

FINISHES AVAILABLE

Fill Y - FINISH

BCP  BRASS CHROME PLATED	BN  BRUSHED NICKEL	CP  CHROME PLATED	MBL  MATTE BLACK
POLN  POLISHED NICKEL	VB  VENETIAN BRONZE	W  WHITE	



Oakville Stamping and Bending Ltd.

T. 905.827.0320 or toll free 1.877.314.6040 F. 905.827.6375 or toll free 1.877.827.6040

All rights reserved. +osb™ reserves the right to change product specifications and material or discontinue models without notice.

www.osb.ca (Canada) www.osbplumbing.com (USA)

November 3, 2025

