



## SPECIFICATION-SUBMITTAL

# 6342C

SEE CONFIGURATION TABLE: X - CONFIG. Y - FINISH

## ABS WASTE/OVERFLOW WITH CABLE-DRIVE® CLOSURE

JOB: \_\_\_\_\_  
CONTRACTOR: \_\_\_\_\_  
ARCHITECT/ENGINEER: \_\_\_\_\_

DATE: \_\_\_\_\_  
QTY: \_\_\_\_\_  
PO#: \_\_\_\_\_  
TAG: \_\_\_\_\_

### SPECIFICATION

Features a brass Euro-style control handle and Euro-style stopper. Available as a kit (less pipe), or with pipe up to a 27" tub size. Uses 1-1/2" pipe, Schedule 40.

### CERTIFICATION









ASME A112.18.2/CSA-B125.2  
The "cCSAus" Meets UPC & IPC  
Code" mark means the product  
conforms to the requirements of  
the NPC, UPC, IPC, and IRC.

CONFIGURATION	FILL <u>X</u> - CONFIG.
FOR 20" TUB	-20
FOR 27" TUB	-27
KIT (LESS PIPE)	K-

### FINISHES AVAILABLE

Fill Y - FINISH

BCP  BRASS CHROME PLATED	BN  BRUSHED NICKEL	CP  CHROME PLATED	MBL  MATTE BLACK
POLN  POLISHED NICKEL	VB  VENETIAN BRONZE	W  WHITE	

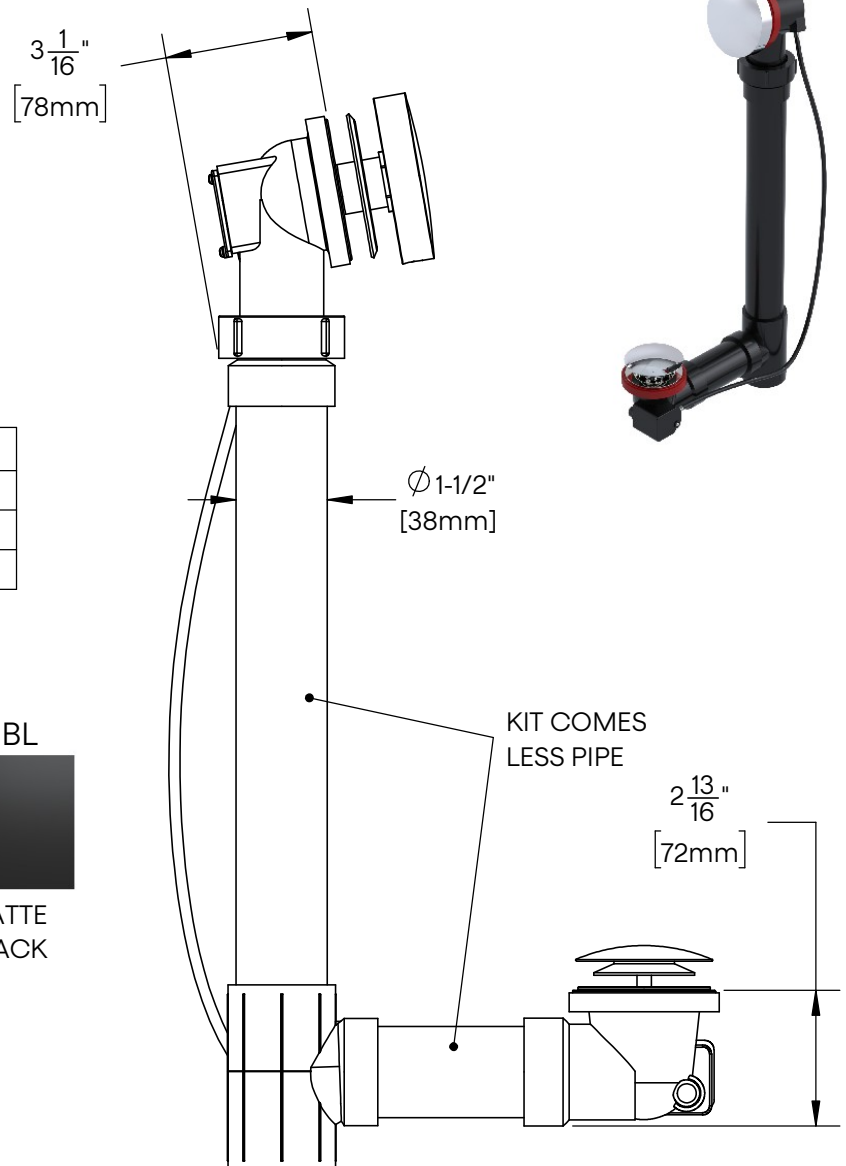

### Oakville Stamping and Bending Ltd.

T. 905.827.0320 or toll free 1.877.314.6040 F. 905.827.6375 or toll free 1.877.827.6040

All rights reserved. +osb™ reserves the right to change product specifications and material or discontinue models without notice.

[www.osb.ca](http://www.osb.ca) (Canada) [www.osbplumbing.com](http://www.osbplumbing.com) (USA)

October 31, 2025

