

AURORALIGHT

PROJECT:

SKU #:

TYPE:

150W Transformer


TR150SS

The 150W Transformer supplies low-voltage 12/13/14/15V power to landscape lighting, outdoor lighting, and submersible light fixtures in residential and commercial applications

- Wall or Stanchion mountable
- Equipped with circuit breakers and thermal switch
- Indoor/Outdoor with IP65 rating
- ETL certified for UL1838 and CSA C22.2#250.7


| | |
|------------------|---|
| DIMENSIONS | L5-1/2" x W6-1/8" x H13-7/8" |
| INPUT VOLTAGE | 120VAC, 50/60Hz |
| OUTPUT VOLTAGE | 12, 13, 14, 15VAC |
| WATTAGE | 150W |
| MATERIAL | 304 Stainless Steel |
| INPUT LEADS | 180cm Water resistant cable |
| OUTPUT LEADS | Terminal block with leads |
| OPTIONS | Not included, Timer, Wireless control, light sensor |
| THERMAL CLASS | 130°, Class B |
| OPERATING TEMP | -20°C to 70°C |
| EFFICIENCY | 90% |
| TRANSFORMER TYPE | Built-in encapsulated toroidal core |
| INSTALLATION | Pre-punched knockouts for cable connectors |

*For complete warranty terms, please visit: www.auroralight.com/warranty/

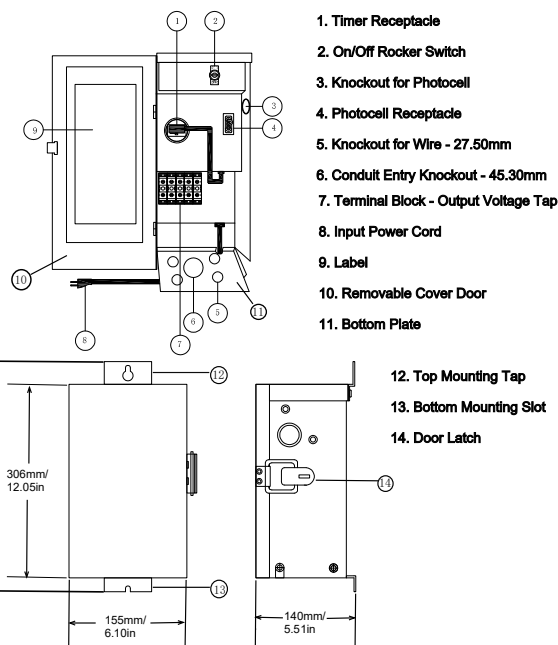

| Specifications | |
|-----------------------------|--|
| Wattage | 150W |
| Input Voltage & Frequency | 120VAC 50/60Hz |
| Input Current | 1.5A |
| Multi Tap | 12-13-14-15VAC |
| Output Voltage at Full Load | 12.8/13.8/14.8/15.8VAC |
| Primary Leads | 180cm PVC Water-resistant Cable with 3-prong US Plug |
| Output Leads | Terminal Block |
| Thermal Class | B130°C |
| Efficiency | 90% |
| Dimensions | 352x155x140mm |
| Weight | 5.4KG |

Wiring Diagram

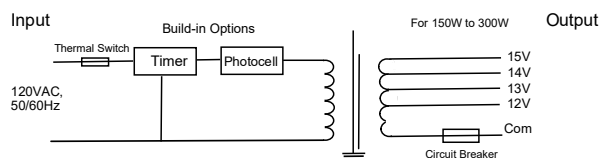

P. 760.931.2910

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com

MADE IN USA
WITH DOMESTIC & IMPORTED MATERIALS

