

# KUZCO | LED LIGHTING

**Filename:** 401214BG-LED - Mina

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Mina - 401214BG - LED

**Lamp:** AC LED Module

**Lamp Cat:** AC LED Module

**Ballast Desc:** 120VAC ; 50/60Hz

**Ballast Cat:** Pernia - KED50 - 120 - A3 - A

**Lamp Output:** Total luminaire Lumens: 455.7

**Max Candela:** 136.0 at Horizontal: 0°, Vertical: 0°

**Input Wattage:** 8.3

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3197-25

**Test Date:** 20 March 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Semi-Direct

**Cutoff Class:** Semicutoff

**Nema Type:** 7 X 7

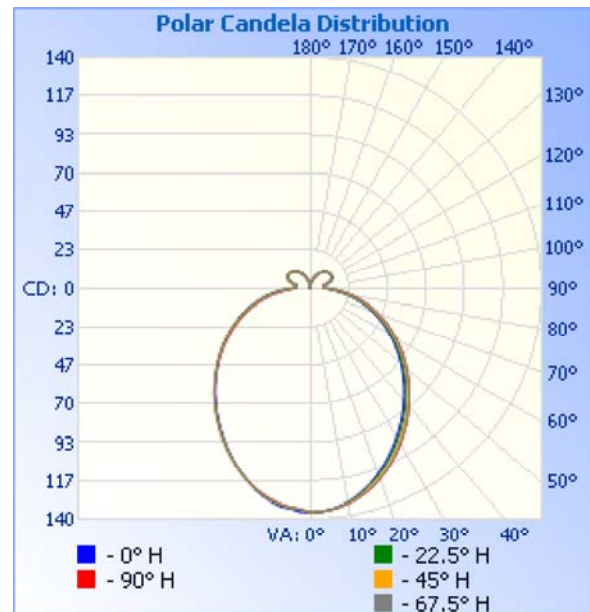



## Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	100.4	22%
0-40	161.7	35.5%
0-60	283.4	62.2%
60-90	100.4	22%
70-100	60.9	13.4%
90-120	35.4	7.8%
0-90	383.8	84.2%
90-180	71.8	15.8%
0-180	455.7	100%

## Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	12.7	2.8%	90-100	9.2	2%
10-20	35.6	7.8%	100-110	11.8	2.6%
20-30	52.1	11.4%	110-120	14.4	3.2%
30-40	61.3	13.4%	120-130	13.3	2.9%
40-50	63.1	13.9%	130-140	10.6	2.3%
50-60	58.6	12.9%	140-150	7.2	1.6%
60-70	48.7	10.7%	150-160	3.9	0.8%
70-80	34.5	7.6%	160-170	1.3	0.3%
80-90	17.1	3.8%	170-180	0.2	0%

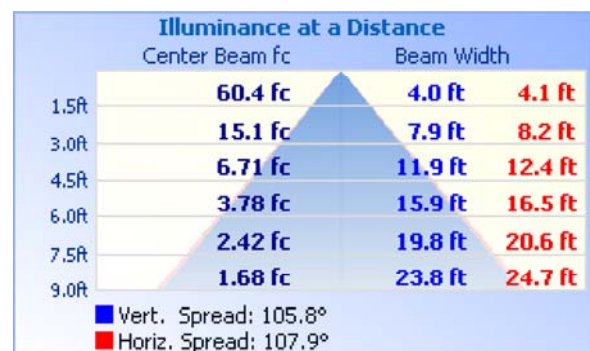

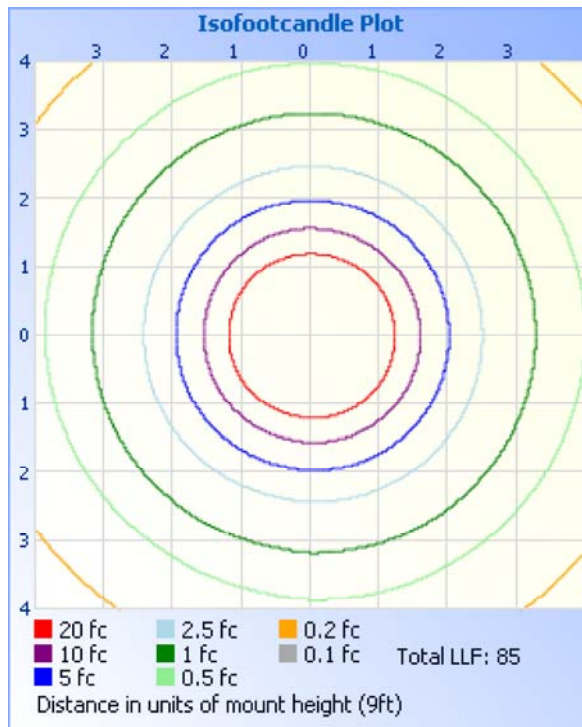

Photometrics Pro 1.3.29 copyright 2003-2025 by jSolutions, Inc.  
Reported data calculated from manufacturer's data file, based on IES recommended methods.