

# KUZCO LED LIGHTING

**Filename:** EW46308-BK-UNV-3CCT - Lenox

**Luminaire Cat:** EW46308-BK-UNV-3CCT

**Lamp:** DC LED

**Lamp Cat:** KMC170-55-020W-3050-036,3CCT\*1PC

**Ballast Cat:** NE024277050-2GH 500mA

**Lamp Output:** Total luminaire Lumens: 1058.5

**Max Candela:** 892.5 at Horizontal: 190°, Vertical: 87°

**Input Wattage:** 20

**Luminous Opening:** Point

**Test:** ZSIES-00018-20240130-A

**Test Date:** 2024-01-30


**Test Lab:** Kuzco ZhongShan LAB

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

**Nema Type:** 6 X 6


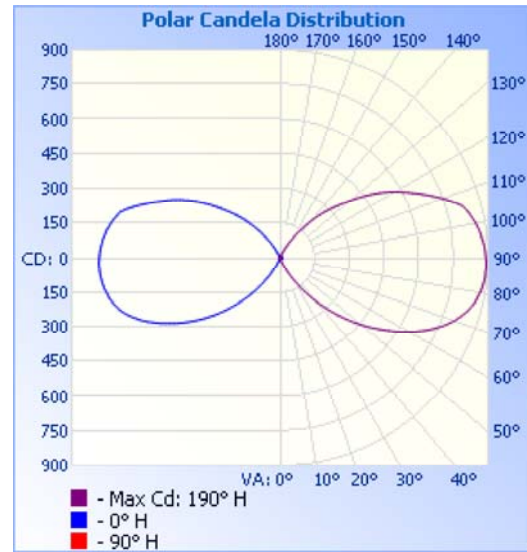


## Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	2.7	0.3%
0-40	17.7	1.7%
0-60	134.4	12.7%
60-90	411.2	38.8%
70-100	454.3	42.9%
90-120	399.7	37.8%
0-90	545.6	51.5%
90-180	512.9	48.5%
0-180	1,058.5	100%

## Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	0.0	0.0%	90-100	156.0	14.7%
10-20	0.2	0.0%	100-110	139.8	13.2%
20-30	2.4	0.2%	110-120	103.9	9.8%
30-40	15.0	1.4%	120-130	65.9	6.2%
40-50	40.9	3.9%	130-140	33.4	3.2%
50-60	75.8	7.2%	140-150	11.6	1.1%
60-70	112.9	10.7%	150-160	1.9	0.2%
70-80	141.9	13.4%	160-170	0.3	0%
80-90	156.3	14.8%	170-180	0.0	0%

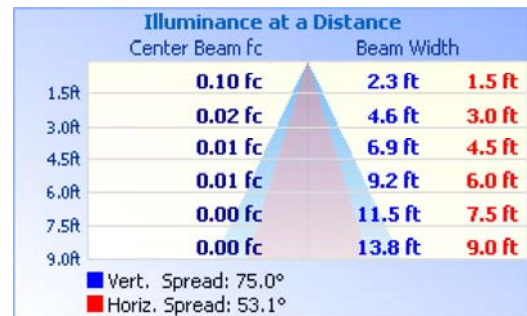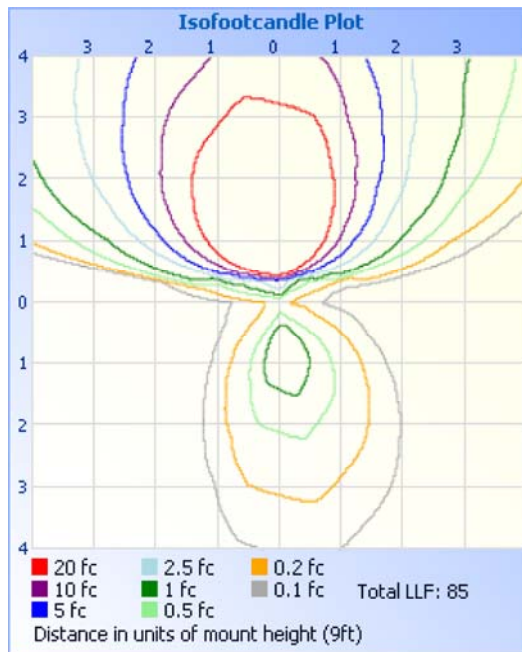

Photometrics Pro 1.3.29 copyright 2003-2025 by jSolutions, Inc.

Reported data calculated from manufacturer's data file, based on IES recommended methods.