



**Filename:** LD3-CC08W14-3015-BK-UNV-010 - Lorna

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** CYLINDER

**Luminaire Cat:** LD3-CC08W14-3015-BK-UNV-010

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.17A max ; Vout = 42VDC max , Iout = 350mA

**Ballast Cat:** EPT - PVD15 - C035V42 - UNV7 - HE - P

**Lamp Output:** Total luminaire Lumens: 1199.4

**Max Candela:** 7,302.0 at Horizontal: 320°, Vertical: 1°

**Input Wattage:** 14.5

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3248-25

**Test Date:** 03 April 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 3 X 3

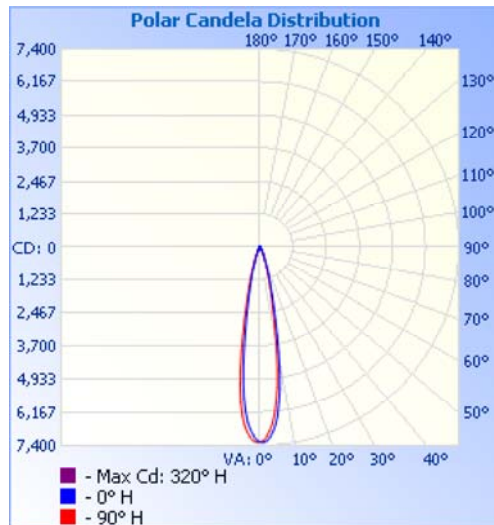

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,077.7	89.8%
0-40	1,134.4	94.6%
0-60	1,173.1	97.8%
60-90	15.6	1.3%
70-100	7.2	0.6%
90-120	0.6	0%
0-90	1,188.7	99.1%
90-180	10.7	0.9%
0-180	1,199.4	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	520.0	43.4%	90-100	0.1	0%
10-20	421.2	35.1%	100-110	0.2	0%
20-30	136.4	11.4%	110-120	0.3	0%
30-40	56.8	4.7%	120-130	0.6	0.1%
40-50	25.8	2.2%	130-140	1.3	0.1%
50-60	12.8	1.1%	140-150	2.3	0.2%
60-70	8.5	0.7%	150-160	2.8	0.2%
70-80	5.4	0.4%	160-170	2.3	0.2%
80-90	1.7	0.1%	170-180	0.8	0.1%

