



**Filename:** LP15548-BG-UNV - Elixir

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** LINEAR PENDANT

**Luminaire Cat:** Elixir - LP15548 - BG - UNV

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 700mA

**Ballast Cat:** Novbo - NE032277070 - 2GH

**Lamp Output:** Total luminaire Lumens: 1792.5

**Max Candela:** 195.5 at Horizontal: 0°, Vertical: 70°

**Input Wattage:** 28.4

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3920-26


**Test Date:** 07 January 2026

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

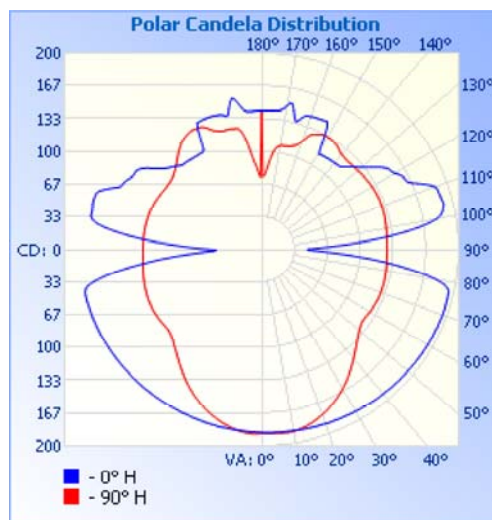


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	152.0	8.5%
0-40	257.9	14.4%
0-60	518.8	28.9%
60-90	444.8	24.8%
70-100	433.9	24.2%
90-120	414.5	23.1%
0-90	963.6	53.8%
90-180	828.9	46.2%
0-180	1,792.5	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	17.8	1.0%	90-100	138.1	7.7%
10-20	52.1	2.9%	100-110	143.2	8%
20-30	82.1	4.6%	110-120	133.2	7.4%
30-40	105.9	5.9%	120-130	115.9	6.5%
40-50	123.5	6.9%	130-140	99.9	5.6%
50-60	137.3	7.7%	140-150	82.4	4.6%
60-70	149.0	8.3%	150-160	64.1	3.6%
70-80	154.6	8.6%	160-170	39.2	2.2%
80-90	141.2	7.9%	170-180	12.9	0.7%

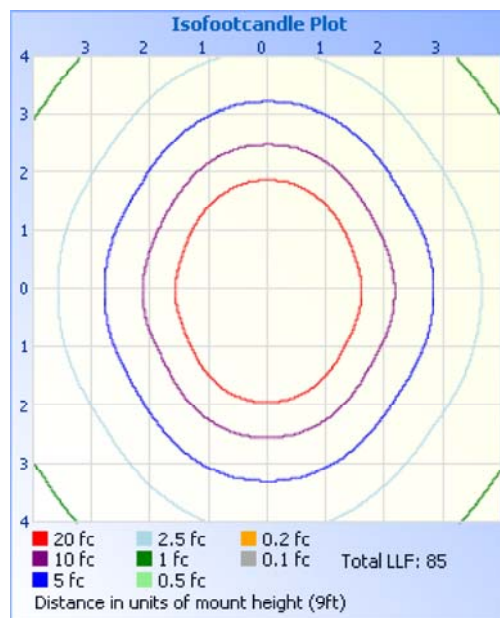

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	83.0 fc	34.8 ft
3.0ft	20.8 fc	69.6 ft
4.5ft	9.23 fc	104.3 ft
6.0ft	5.19 fc	139.1 ft
7.5ft	3.32 fc	173.9 ft
9.0ft	2.31 fc	208.7 ft

■ Beam Spread: 170.1°