

KUZCO LIGHTING | LED

Filename: LP15548-BK-UNV - Elixir

Manufacturer: KUZCO LIGHTING

Luminaire: LINEAR PENDANT

Luminaire Cat: Elixir - LP15548 - BK - UNV

Lamp: DC LED Module

Lamp Cat: DC LED Module

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 700mA

Ballast Cat: Novbo - NE032277070 - 2GH

Lamp Output: Total luminaire Lumens: 1558.5

Max Candela: 177.5 at Horizontal: 190°, Vertical: 59°

Input Wattage: 28.2

Luminous Opening: Rectangle (L: 4.57", W: 10")

Test: 3921-26


Test Date: 07 January 2026

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff


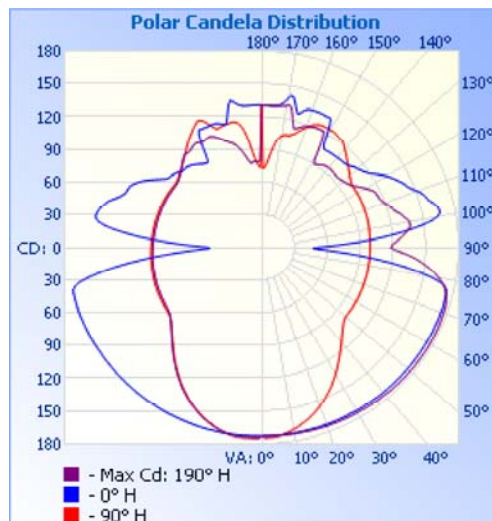


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	139.1	8.9%
0-40	234.2	15%
0-60	462.9	29.7%
60-90	382.1	24.5%
70-100	372.3	23.9%
90-120	355.0	22.8%
0-90	845.0	54.2%
90-180	713.5	45.8%
0-180	1,558.5	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	16.5	1.1%	90-100	118.9	7.6%
10-20	47.9	3.1%	100-110	122.6	7.9%
20-30	74.7	4.8%	110-120	113.5	7.3%
30-40	95.0	6.1%	120-130	99.6	6.4%
40-50	109.1	7.0%	130-140	85.7	5.5%
50-60	119.7	7.7%	140-150	70.7	4.5%
60-70	128.6	8.3%	150-160	56.0	3.6%
70-80	132.7	8.5%	160-170	34.9	2.2%
80-90	120.7	7.7%	170-180	11.6	0.7%

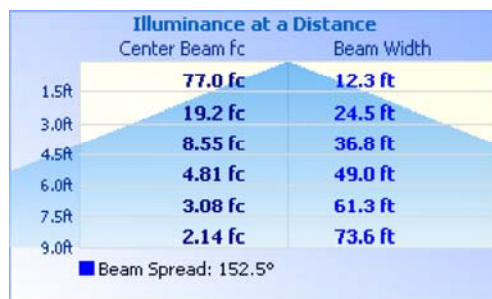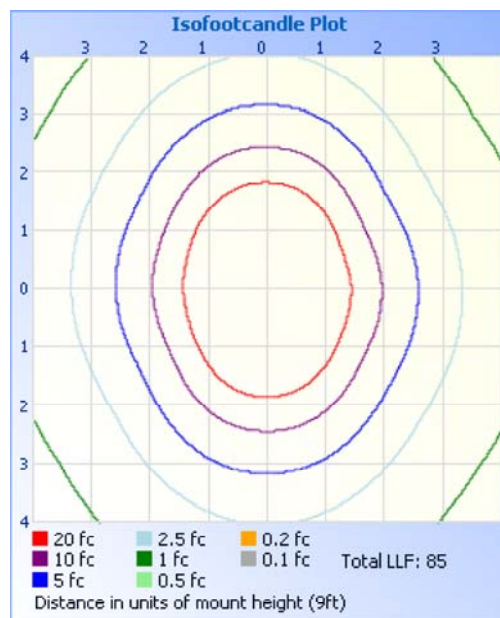

Photometrics Pro 1.3.29 copyright 2003-2026 by jSolutions, Inc.
Reported data calculated from manufacturer's data file, based on IES recommended methods.