

KUZCO LIGHTING | LED

Filename: LP15548-CH-UNV - Elixir

Manufacturer: KUZCO LIGHTING

Luminaire: LINEAR PENDANT

Luminaire Cat: Elixir - LP15548 - CH - UNV

Lamp: DC LED Module

Lamp Cat: DC LED Module

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 700mA

Ballast Cat: Novbo - NE032277070 - 2GH

Lamp Output: Total luminaire Lumens: 1927

Max Candela: 205.2 at Horizontal: 90°, Vertical: 4°

Input Wattage: 28.7

Luminous Opening: Rectangle (L: 4.57", W: 10")

Test: 3922-26

Test Date: 07 January 2026

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse



Cutoff Class: Noncutoff

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	165.4	8.6%
0-40	282.8	14.7%
0-60	577.2	30%
60-90	490.5	25.5%
70-100	473.3	24.6%
90-120	442.0	22.9%
0-90	1,067.7	55.4%
90-180	859.3	44.6%
0-180	1,927.0	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	19.3	1.0%	90-100	149.3	7.8%
10-20	56.4	2.9%	100-110	152.5	7.9%
20-30	89.7	4.7%	110-120	140.1	7.3%
30-40	117.4	6.1%	120-130	122.5	6.4%
40-50	139.0	7.2%	130-140	100.6	5.2%
50-60	155.4	8.1%	140-150	80.8	4.2%
60-70	166.5	8.6%	150-160	62.5	3.2%
70-80	169.8	8.8%	160-170	38.3	2%
80-90	154.1	8.0%	170-180	12.6	0.7%

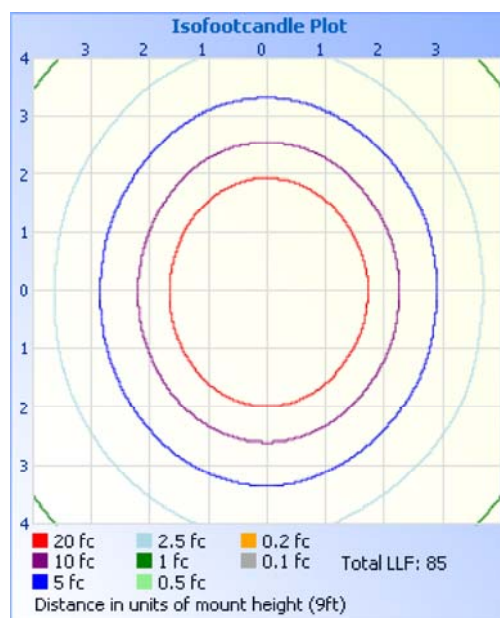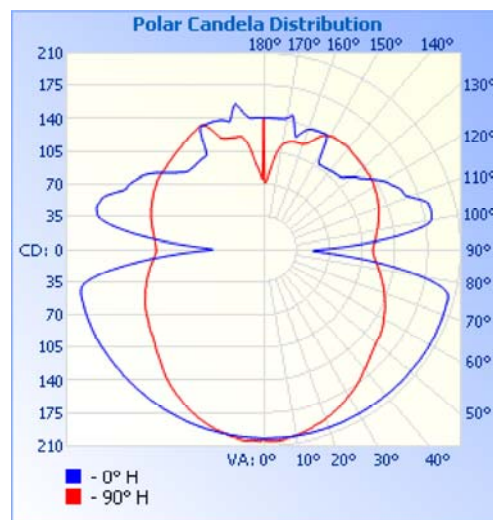

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	90.1 fc	75.6 ft
3.0ft	22.5 fc	151.2 ft
4.5ft	10.0 fc	226.8 ft
6.0ft	5.63 fc	302.4 ft
7.5ft	3.60 fc	378.0 ft
9.0ft	2.50 fc	453.6 ft

■ Beam Spread: 175.5°