

# KUZCO LIGHTING | LED

**Filename:** LP28748-BK\_BG-UNV - Shift

**Luminaire:** LP28748-BK/BG

**Lamp Output:** Total luminaire Lumens: 1212.8

**Max Candela:** 498.5 at Horizontal: 0°, Vertical: 0°

**Input Wattage:** 36.4

**Luminous Opening:** Point

**Test:** TH-4185A

**Test Lab:** Inventfine instrument

**Photometry :** Type C


**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 7 X 7



## Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	375.5	31%
0-40	602.8	49.7%
0-60	1,012.5	83.5%
60-90	190.4	15.7%
70-100	63.0	5.2%
90-120	0.7	0.1%
0-90	1,202.9	99.2%
90-180	9.9	0.8%
0-180	1,212.8	100%

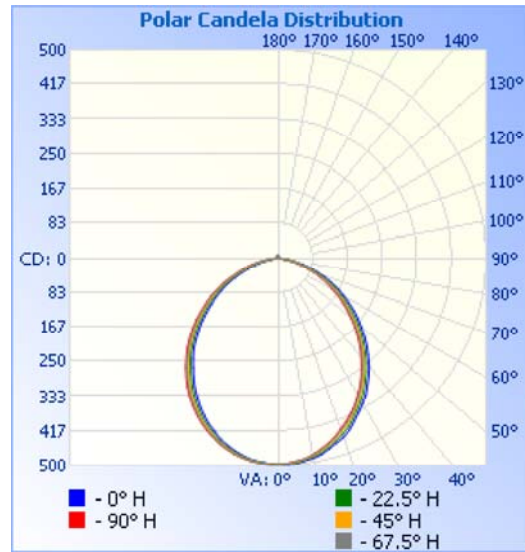

## Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	46.9	3.9%	90-100	0	0%
10-20	132.6	10.9%	100-110	0.0	0%
20-30	196.1	16.2%	110-120	0.7	0.1%
30-40	227.3	18.7%	120-130	1.4	0.1%
40-50	223.1	18.4%	130-140	1.9	0.2%
50-60	186.5	15.4%	140-150	2.1	0.2%
60-70	127.4	10.5%	150-160	1.9	0.2%
70-80	56.9	4.7%	160-170	1.4	0.1%
80-90	6.1	0.5%	170-180	0.5	0%

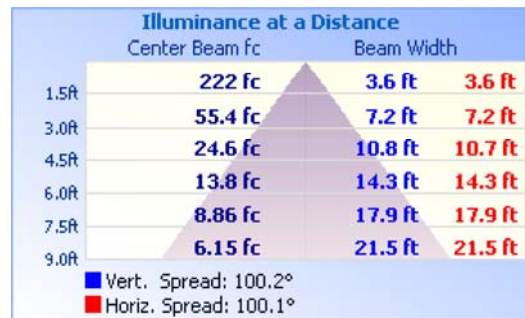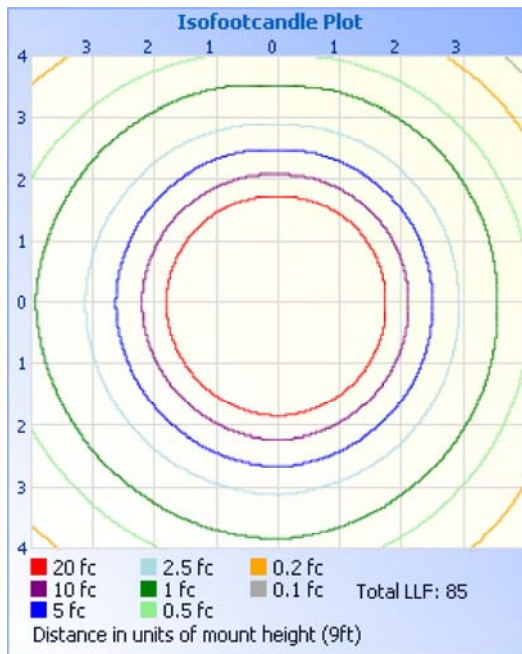

Photometrics Pro 1.3.29 copyright 2003-2025 by jSolutions, Inc.

Reported data calculated from manufacturer's data file, based on IES recommended methods.