

**Filename: MP14850-BK - Chute**

Manufacturer: Kuzco Lighting

Luminaire: CHUTE / WALL MOUNT

Luminaire Cat: MP14850-BK

Lamp: DC LED/ w DRIVER

Lamp Cat: UNKNOWN

Ballast Desc: [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1800mA (const)] | [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1200mA (const)]

Ballast Cat: [3xDR-CC-80-42] | [1xDR-CC-60-42]

Lamp Output: Total luminaire Lumens: 10572.5

Max Candela: 1,298.9 at Horizontal: 80°, Vertical: 52.5°

Input Wattage: 260


Luminous Opening: Vertical Cylinder (Dia : 50.04", H: 13.2")

Test Lab: Kuzco Lighting

Photometry : Type C

CIE Class: Semi-Direct


Cutoff Class: Noncutoff

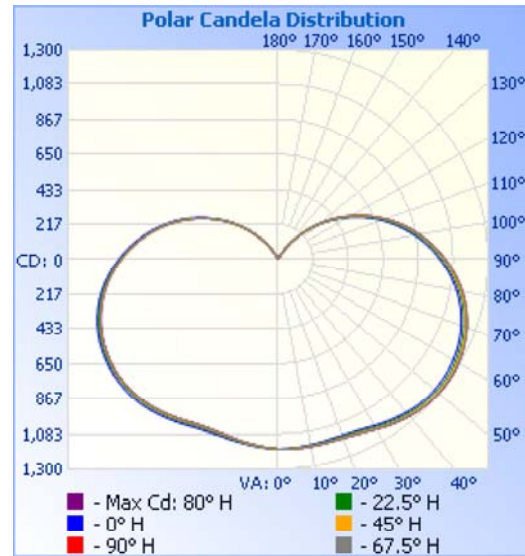**Zonal Lumen Summary**

Zone	Lumens	% Luminaire
0-30	980.1	9.3%
0-40	1,740.4	16.5%
0-60	3,832.9	36.3%
60-90	3,607.9	34.1%
70-100	3,406.5	32.2%
90-120	2,445.7	23.1%
0-90	7,440.8	70.4%
90-180	3,131.7	29.6%
0-180	10,572.5	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	111.5	1.1%	90-100	1,017.3	9.6%
10-20	328.2	3.1%	100-110	824.0	7.8%
20-30	540.3	5.1%	110-120	604.4	5.7%
30-40	760.3	7.2%	120-130	388.1	3.7%
40-50	966.0	9.1%	130-140	202.2	1.9%
50-60	1,126.5	10.7%	140-150	73.2	0.7%
60-70	1,218.7	11.5%	150-160	16.1	0.2%
70-80	1,230.0	11.6%	160-170	4.9	0%
80-90	1,159.2	11.0%	170-180	1.5	0%

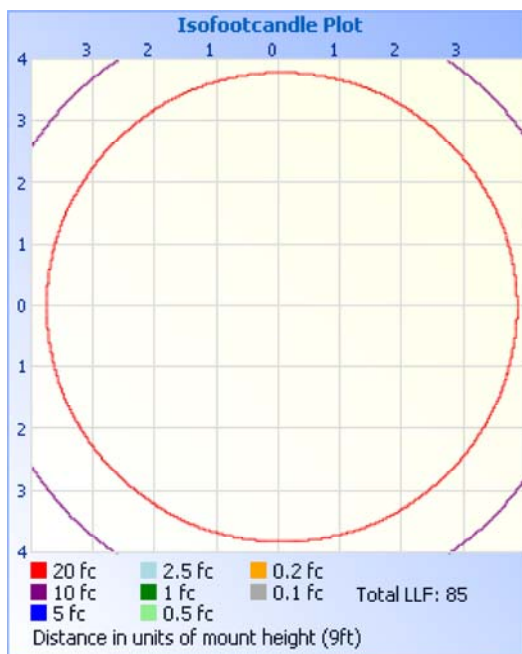

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	522 fc	
3.0ft	131 fc	
4.5ft	58.0 fc	
6.0ft	32.6 fc	
7.5ft	20.9 fc	
9.0ft	14.5 fc	