

KUZCO LIGHTING | LED

Filename: MP14924-WH - Chute

Manufacturer: Kuzco Lighting

Luminaire Cat: MP14924-WH

Lamp: LED/ w DRIVER

Lamp Cat: UNKNOWN

Ballast Desc: [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1800mA (const)] | [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1500mA (const)]

Ballast Cat: [DR-CC-80-42] | [DR-CC-60-42]

Lamp Output: Total luminaire Lumens: 6392.3

Max Candela: 713.7 at Horizontal: 157.5°, Vertical: 90°

Input Wattage: 135


Luminous Opening: Vertical Cylinder (Dia : 25.56", H: 35.04")

Test Lab: Kuzco Lighting

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

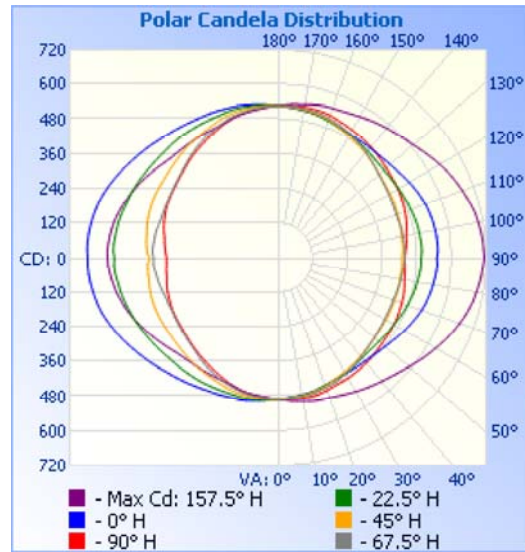


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	409.3	6.4%
0-40	710.9	11.1%
0-60	1,523.6	23.8%
60-90	1,618.5	25.3%
70-100	1,696.7	26.5%
90-120	1,647.8	25.8%
0-90	3,142.1	49.2%
90-180	3,250.2	50.8%
0-180	6,392.3	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	46.9	0.7%	90-100	577.5	9%
10-20	138.8	2.2%	100-110	556.1	8.7%
20-30	223.5	3.5%	110-120	514.3	8%
30-40	301.7	4.7%	120-130	456.7	7.1%
40-50	373.0	5.8%	130-140	391.1	6.1%
50-60	439.7	6.9%	140-150	318.8	5%
60-70	499.4	7.8%	150-160	237.7	3.7%
70-80	545.9	8.5%	160-170	148.0	2.3%
80-90	573.2	9.0%	170-180	50.1	0.8%

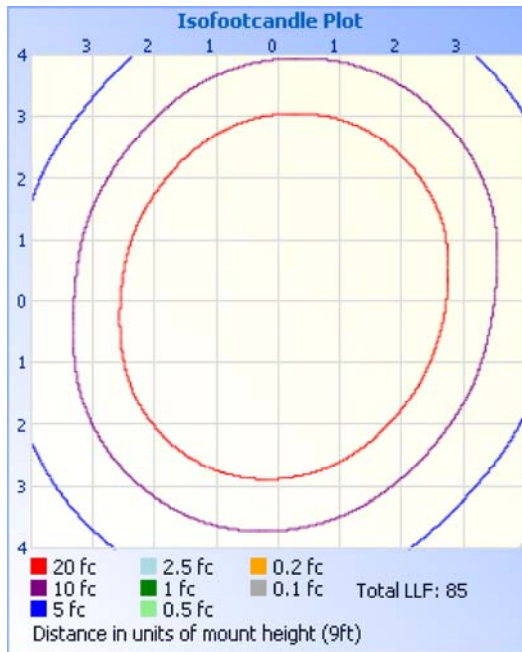

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	218 fc	
3.0ft	54.6 fc	
4.5ft	24.2 fc	
6.0ft	13.6 fc	
7.5ft	8.73 fc	
9.0ft	6.06 fc	